



VEHICLE					PIONEER	CONNECTOR	HEIGHT ADDED mm / in	
LAND ROVER Defender 130 L663 4WD-SUV Factory Track 5dr					62107	RLDB1	105 / 4.1	
REGION	AUS	NZ	USA	CA	SA	UK	EU	ZA
AVAILABILITY	✓	✓	✓	✓	✓	✓	✓	✓
RUN DATES	2023 -	2023 -	2023 -	2023 -	2023 -	2023 -	2023 -	2023 -
VEHICLE NOTES	Can operate Glass sun roof. Do not operate fabric folding roof. -							


VISIT THE ONLINE CALCULATOR FOR CURRENT SYSTEM LOAD LIMIT DATA




DYNAMIC LOAD LIMIT (ON AND OFF-ROAD):
***USE THE VEHICLE MANUFACTURER'S MAXIMUM ROOF ALLOWANCE IF IT IS LOWER THAN THE FIGURE LISTED**


 CARGO


 SYSTEM WEIGHT


 LOAD LIMIT

OR


 Max kg

UP TO **89 Kg**
196 lbs


+

31 Kg
68 lbs

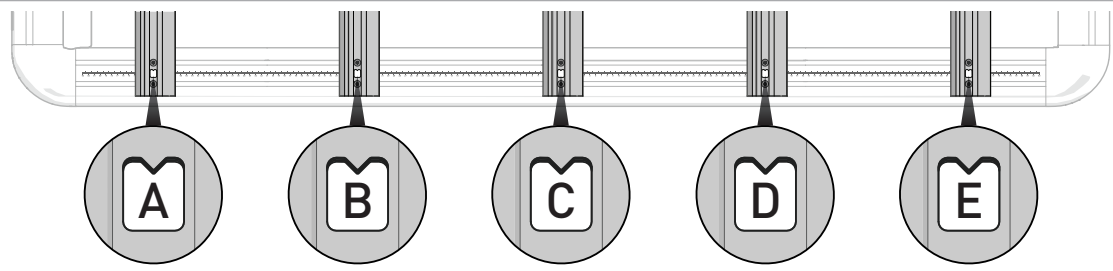
=

UP TO **120 Kg**
264 lbs

***VEHICLE MANUFACTURER'S ROOF LOAD LIMIT**


TOTAL STATIC LOAD LIMIT: UP TO 300 Kg / 661 lbs*

UNDERBAR SPACING

FRONT								REAR
BAR	A	B	C	D	E	F	G	
DIMENSION (CM)	-75.2	-38.5	-2.6	33.5	70			
SPACERS REQ'D								
CONNECTOR	BACKBONE			BACKBONE		BACKBONE		
OUTER UNDERBAR COVER (mm/in)	Refer to Step 13 in Pioneer Series 6 Fitting Instructions to trim B and C							
CENTRE UNDERBAR COVER (mm/in)	Refer to Step 13 in Pioneer Series 6 Fitting Instructions to trim A							

NOTES FOR DEALERS / FITTERS

It is your responsibility to ensure these fitting instructions are given to the end user or client.