






VEHICLE					PIONEER	CONNECTOR	HEIGHT ADDED mm / in	
LAND ROVER Defender 130 L663 4WD-SUV Factory Track 5dr					62107	RCL6	105 / 4.1	
REGION	AUS	NZ	USA	CA	SA	UK	EU	ZA
AVAILABILITY	✓	✓	✓	✓	✓	✓	✓	✓
RUN DATES	2023 -	2023 -	2023 -	2023 -	2023 -	2023 -	2023 -	2023 -
VEHICLE NOTES	Centre of Front RCL leg positioned 65mm from front of track (Refer Leg supplement 520-RFI-00168). Use caution when operating glass sun roof. Do not operate fabric folding roof. -							

VISIT THE ONLINE CALCULATOR FOR CURRENT SYSTEM LOAD LIMIT DATA




**DYNAMIC LOAD LIMIT (ON AND OFF-ROAD):**  
**\*USE THE VEHICLE MANUFACTURER'S MAXIMUM ROOF ALLOWANCE IF IT IS LOWER THAN THE FIGURE LISTED**

 CARGO	 SYSTEM WEIGHT	+	=	 LOAD LIMIT	OR	 Max kg
UP TO <b>74 Kg</b> <b>163 lbs</b>				UP TO <b>100 Kg</b> <b>220 lbs</b>		<b>*VEHICLE MANUFACTURER'S ROOF LOAD LIMIT</b>


**TOTAL STATIC LOAD LIMIT: UP TO 300 Kg / 661 lbs\***

## UNDERBAR SPACING

	BAR	A	B	C	D	E	F	G
<b>FRONT</b>	DIMENSION (CM)	-70	-34.7	0	42.5	80		
	SPACERS REQ'D					QMVA20		
	CONNECTOR	RCL		RCL		RCL		
	OUTER UNDERBAR COVER (mm/in)	Refer to Step 11-12 in Pioneer Series 6 Fitting Instructions to trim B and C						
	CENTRE UNDERBAR COVER (mm/in)	Refer to Step 11-12 in Pioneer Series 6 Fitting Instructions to trim A						

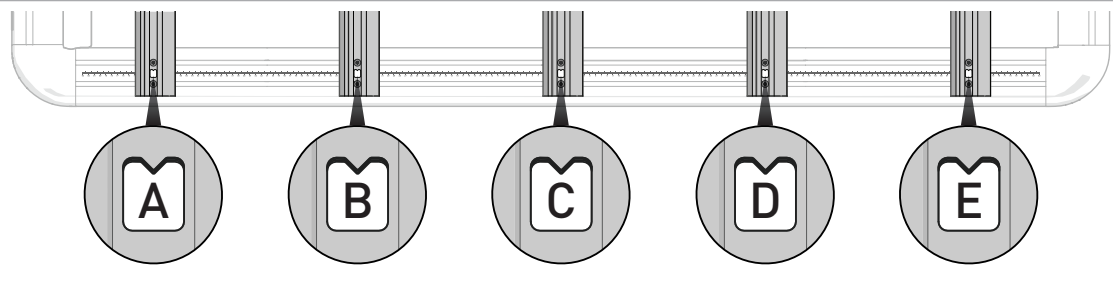

### NOTES FOR DEALERS / FITTERS

It is your responsibility to ensure these fitting instructions are given to the end user or client.