





VEHICLE					PIONEER	CONNECTOR	HEIGHT ADDED mm / in	
NISSAN Navara Dual Cab NP300 Pickup/Ute Bare Roof 4 dr					62100	RNNB2	89 / 4	
REGION	AUS	NZ	USA	CA	SA	UK	EU	ZA
AVAILABILITY	✓	✓	✗	✗	✗	✗	✗	✗
RUN DATES	2015 -	2015 -	-	-	-	-	-	-
VEHICLE NOTES	- Do not operate sunroof							

VISIT THE ONLINE CALCULATOR FOR CURRENT SYSTEM LOAD LIMIT DATA

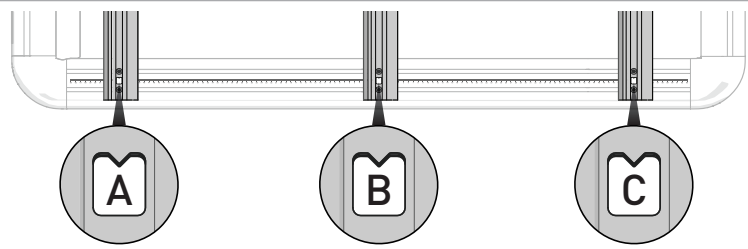


**DYNAMIC ROAD LOAD LIMIT (NOTE: DIFFERENT ON AND OFF ROAD CARGO LIMIT)**  
**\*USE THE VEHICLE MANUFACTURER'S MAXIMUM ROOF ALLOWANCE IF IT IS LOWER THAN THE FIGURE LISTED**

 LOAD LIMIT	 SYSTEM WEIGHT	 ON ROAD CARGO LIMIT	 OFF ROAD CARGO LIMIT <small>(ON ROAD CARGO LIMIT / 1.5)</small>
UP TO <b>100 Kg*</b> <b>220 lbs</b>	UP TO <b>22 Kg</b> <b>48 lbs</b>	UP TO <b>78 Kg</b> <b>172 lbs</b>	UP TO <b>52 Kg</b> <b>115 lbs</b>

**OR**

## UNDERBAR SPACING

<b>FRONT</b>								<b>REAR</b>
BAR	A	B	C	D	E	F	G	
DIMENSION (CM)	-54.5	0	52					
SPACERS REQ'D								
CONNECTOR	<b>BACKBONE</b>		<b>BACKBONE</b>					
OUTER UNDERBAR COVER (mm/in)	Refer to Step 13 in Pioneer Series 6 Fitting Instructions to trim B and C							
CENTRE UNDERBAR COVER (mm/in)	Refer to Step 13 in Pioneer Series 6 Fitting Instructions to trim B and C							

### NOTES FOR DEALERS / FITTERS

It is your responsibility to ensure these fitting instructions are given to the end user or client.