






VEHICLE					PIONEER	CONNECTOR	HEIGHT ADDED mm / in	
TOYOTA Prado 250 Series 4WD-SUV 5dr					62107	RTPB3	103 / 4.1	
REGION	AUS	NZ	USA	CA	SA	UK	EU	ZA
AVAILABILITY	✓	✓	✗	✗	✗	✗	✗	✗
RUN DATES	2024 -	2024 -	-	-	-	-	-	-
VEHICLE NOTES	- Do not operate sunroof							

VISIT THE ONLINE CALCULATOR FOR CURRENT SYSTEM LOAD LIMIT DATA

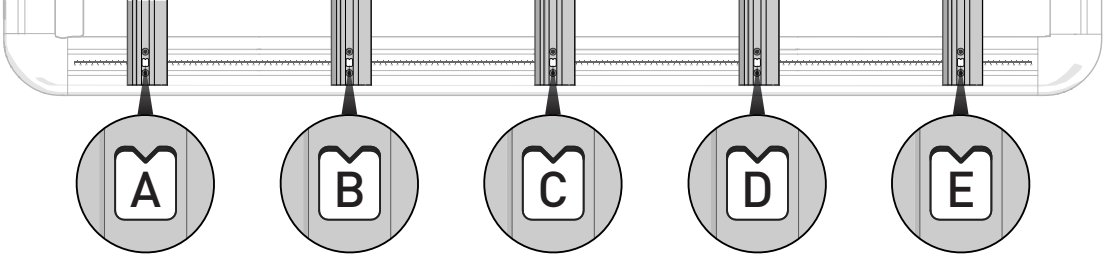


DYNAMIC LOAD LIMIT (ON AND OFF-ROAD):
***USE THE VEHICLE MANUFACTURER'S MAXIMUM ROOF ALLOWANCE IF IT IS LOWER THAN THE FIGURE LISTED**

 CARGO	 SYSTEM WEIGHT			 LOAD LIMIT	OR	 Max kg
UP TO 119 Kg 262 lbs	+ 31 Kg 68 lbs	=		UP TO 150 Kg 330 lbs		*VEHICLE MANUFACTURER'S ROOF LOAD LIMIT


TOTAL STATIC LOAD LIMIT: UP TO 375 Kg / 827 lbs*

UNDERBAR SPACING

	FRONT	A	B	C	D	E	F	G	REAR
									
BAR		A	B	C	D	E	F	G	
DIMENSION (CM)		-71	-27.5	16	49.5	83			
SPACERS REQ'D									
CONNECTOR		RTPB3		RTPB3		RTPB3			
OUTER UNDERBAR COVER (mm/in)		Refer to Step 13 in the Pioneer Series 6 Instructions to trim B and C							
CENTRE UNDERBAR COVER (mm/in)		Refer to Step 13 in the Pioneer Series 6 Instructions to trim A							

NOTES FOR DEALERS / FITTERS

It is your responsibility to ensure these fitting instructions are given to the end user or client.