


VEHICLE	PIONEER SIZE	CONNECTOR	HEIGHT ADDED (mm / in)
FORD Excursion 4WD/SUV Factory Track 4 dr	52104	RLT600	130 / 5.1

IMPORTANT NOTES	- Do not operate sunroof
-----------------	--------------------------

REGION	AUS	NZ	USA	CA	SA	UK	EU	ZA
AVAILABILITY	x	x	✓	✓	x	x	x	x
RUNNING DATES	-	-	2000 - 2005	2000 - 2005	-	-	-	-

**UNDERBAR SPACING**

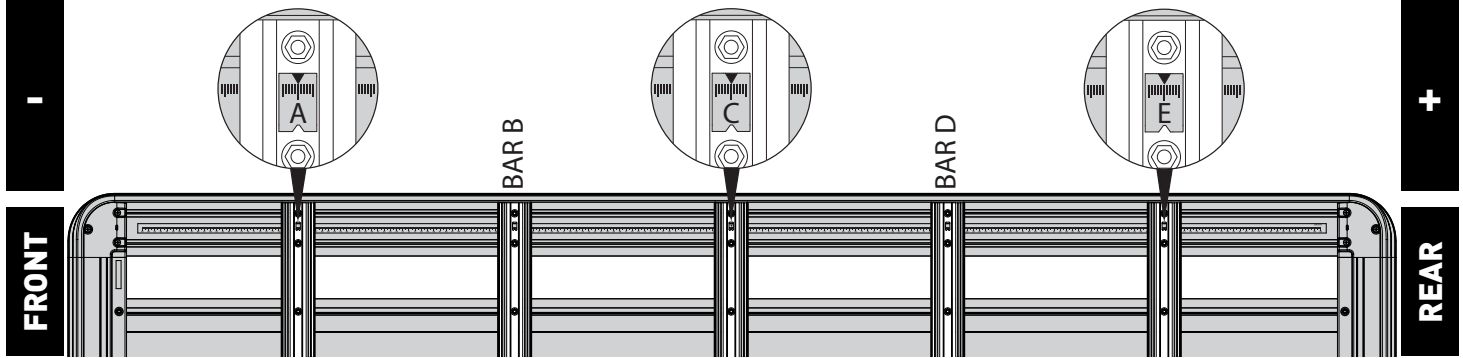

BAR NO.	A	B	C	D	E	F	G
DIMENSION (CM)	-78.5	-15.6	13.7	43.4	79		
SPACERS REQ'D							
CONNECTOR	RLT600		RLT600		RLT600		

VEHICLE LOAD LIMIT (VLL) (kg / lbs)	SYSTEM WEIGHT (SW) (kg / lbs)	ON-ROAD CARGO ALLOW. (OR)	OFF-ROAD CARGO ALLOW. (OFR)
Up to 100 / 220.5 *	33 / 72.8	OR = VLL - SW	OFR = OR / 1.5

**\*CHECK YOUR VEHICLE OWNERS HAND BOOK FOR VEHICLE MAXIMUM CARRYING CAPACITY. PLEASE ENSURE YOU USE THE VEHICLE MANUFACTURERS MAXIMUM ROOF ALLOWANCE IF IT IS LOWER THAN THE FIGURE LISTED IN THIS INSTRUCTION.**

**NOTES FOR DEALERS / FITTERS**  
 It is your responsibility to ensure these fitting instructions are given to the end user or client.

Document No: R2265  
 Issue No: 1  
 Issue Date: 08-Oct-20  
 These instructions remain the property of Rhino-Rack Australia Pty. Ltd. and may not be used or changed for any other purpose than intended.