

RHINO-RACK | PIONEER VEHICLE FITTING INFORMATION

VEHICLE	PIONEER SIZE	CONNECTOR	HEIGHT ADDED (mm / in)
LAND ROVER Defender 110 4WD/SUV Gutters 4 dr	52105	RL210DS8	

IMPORTANT NOTES


- Do not operate sunroof

REGION	AUS	NZ	USA	CA	SA	UK	EU	ZA
AVAILABILITY	✓	✓	✓	✓	×	✓	✓	✓
RUNNING DATES	1993 - 2016	1993 - 2016	1993 - 1994	1993 - 1994	-	1993 - 2016	1993 - 2016	1993 - 2016

UNDERBAR SPACING

CONNECTOR

RL210

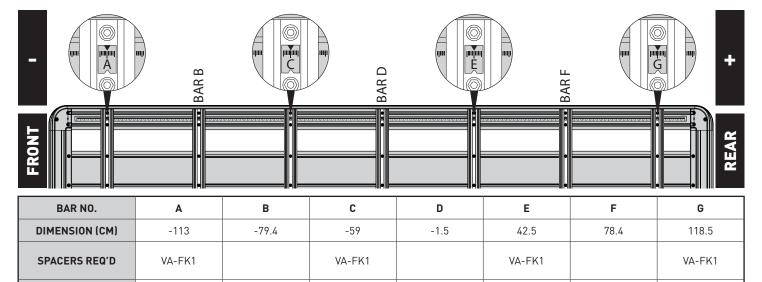

VEHICLE LOAD LIMIT (VLL) (kg / lbs)	SYSTEM WEIGHT (SW) (kg / lbs)	ON-ROAD CARGO ALLOW. (OR)	OFF-ROAD CARGO ALLOW. (OFR)	
Up to 100 / 220.5 *	43 / 94.8	OR = VLL - SW	OFR = OR / 1.5	

RL210

*CHECK YOUR VEHICLE OWNERS HAND BOOK FOR VEHICLE MAXIMUM CARRYING CAPACITY. PLEASE ENSURE YOU USE THE VEHICLE MANUFACTURERS MAXIMUM ROOF ALLOWANCE IF IT IS LOWER THAN THE FIGURE LISTED IN THIS INSTRUCTION.

NOTES FOR DEALERS / FITTERS

It is your responsibility to ensure these fitting instructions are given to the end user or client.

Document No: R2276 Issue Date: 20-Apr-21

These instructions remain the property of Rhino-Rack Australia Pty. Ltd. and may not be used or changed for any other purpose than intended.

RL210

RL210

rhinorack.com Page 1 of 1