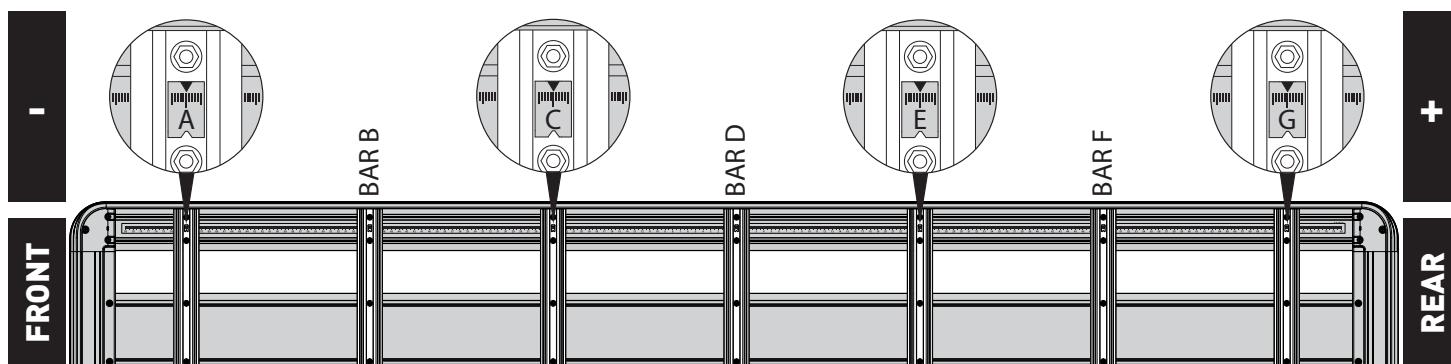


VEHICLE	PIONEER SIZE	CONNECTOR	HEIGHT ADDED (mm / in)
HYUNDAI iLoad Van Bare Roof 2 dr	52105	RLTF	

**IMPORTANT NOTES**

- Do not operate sunroof

REGION	AUS	NZ	USA	CA	SA	UK	EU	ZA
AVAILABILITY	✓	✓	✓	✗	✗	✓	✓	✗
RUNNING DATES	02/08 -	02/08 -	2008 -	-	-	2008 -	2008 -	-

**UNDERBAR SPACING**


BAR NO.	A	B	C	D	E	F	G
DIMENSION (CM)	-89.2	-79.4	-41.5	-1.5	39	78.4	114.5
SPACERS REQ'D	VA-FK1 / LHS-A1PAIR		VA-FK1		VA-FK1		VA-FK1 / LHS-A1PAIR
CONNECTOR	RLTF		RLTF		RLTF		RLTF

VEHICLE LOAD LIMIT (VLL) (kg / lbs)	SYSTEM WEIGHT (SW) (kg / lbs)	ON-ROAD CARGO ALLOW. (OR)	OFF-ROAD CARGO ALLOW. (OFR)
Up to 125 / 275.6 *	49 / 108.0	OR = VLL - SW	OFR = OR / 1.5

**\*CHECK YOUR VEHICLE OWNERS HAND BOOK FOR VEHICLE MAXIMUM CARRYING CAPACITY. PLEASE ENSURE YOU USE THE VEHICLE MANUFACTURERS MAXIMUM ROOF ALLOWANCE IF IT IS LOWER THAN THE FIGURE LISTED IN THIS INSTRUCTION.**

**NOTES FOR DEALERS / FITTERS**

It is your responsibility to ensure these fitting instructions are given to the end user or client.

Document No: R2278  
Issue No: 1  
Issue Date: 09-Apr-21

These instructions remain the property of Rhino-Rack Australia Pty. Ltd. and may not be used or changed for any other purpose than intended.