


| VEHICLE | PIONEER SIZE | CONNECTOR | HEIGHT ADDED (mm / in) |
|---|--------------|-----------|------------------------|
| ISUZU MU-X LS-T 4WD/SUV Flush Rail 4 dr | 52107 | RLT600 | |

| | |
|-----------------|---|
| IMPORTANT NOTES | Flush rails to be removed following steps in instruction R715. - Do not operate sunroof |
|-----------------|---|

| REGION | AUS | NZ | USA | CA | SA | UK | EU | ZA |
|---------------|---------|---------|-----|----|----|----|----|----|
| AVAILABILITY | ✓ | ✓ | ✗ | ✗ | ✗ | ✗ | ✗ | ✗ |
| RUNNING DATES | 12/13 - | 12/13 - | - | - | - | - | - | - |

UNDERBAR SPACING

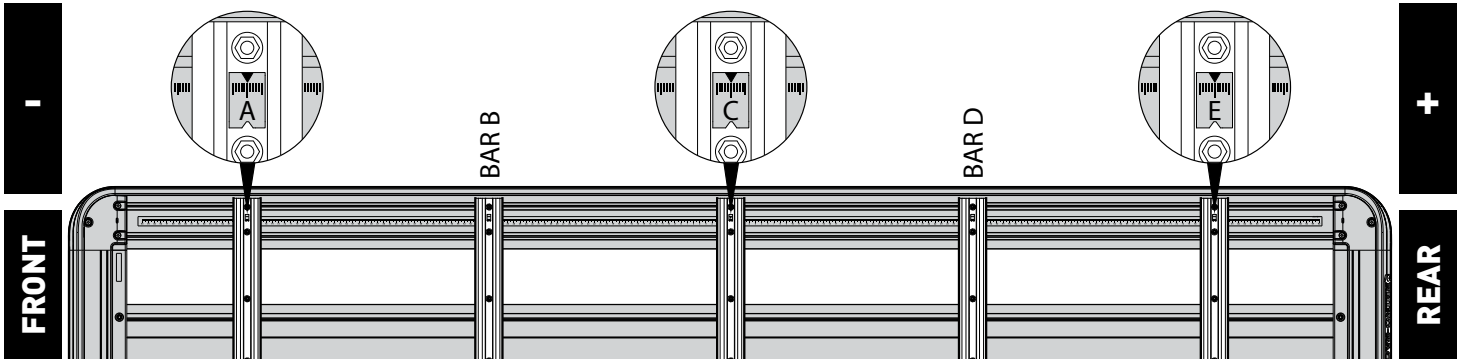

| BAR NO. | A | B | C | D | E | F | G |
|----------------|----------------|-------|--------|------|--------|---|---|
| DIMENSION (CM) | -71.5 | -15.6 | 1.5 | 48.4 | 84.5 | | |
| SPACERS REQ'D | QMVA15 / QMW10 | | | | QMVA10 | | |
| CONNECTOR | RLT600 | | RLT600 | | RLT600 | | |

| VEHICLE LOAD LIMIT (VLL) (kg / lbs) | SYSTEM WEIGHT (SW) (kg / lbs) | ON-ROAD CARGO ALLOW. (OR) | OFF-ROAD CARGO ALLOW. (OFR) |
|--|----------------------------------|---------------------------|-----------------------------|
| Up to 100 / 220.5 * | 30 / 66.1 | OR = VLL - SW | OFR = OR / 1.5 |

***CHECK YOUR VEHICLE OWNERS HAND BOOK FOR VEHICLE MAXIMUM CARRYING CAPACITY. PLEASE ENSURE YOU USE THE VEHICLE MANUFACTURERS MAXIMUM ROOF ALLOWANCE IF IT IS LOWER THAN THE FIGURE LISTED IN THIS INSTRUCTION.**

NOTES FOR DEALERS / FITTERS

It is your responsibility to ensure these fitting instructions are given to the end user or client.

Document No: R2296
Issue No: 1
Issue Date: 14-Apr-20

These instructions remain the property of Rhino-Rack Australia Pty. Ltd. and may not be used or changed for any other purpose than intended.