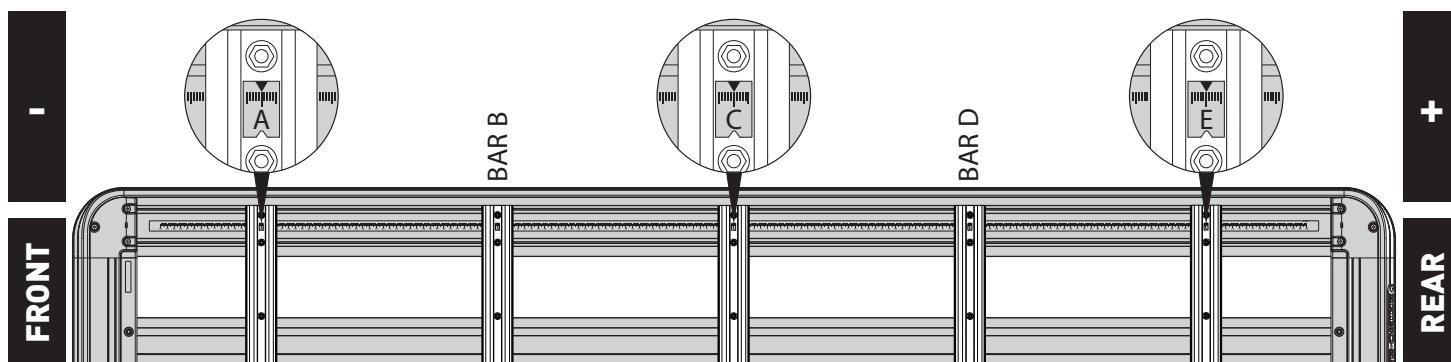


VEHICLE	PIONEER SIZE	CONNECTOR	HEIGHT ADDED (mm / in)
HOLDEN Trailblazer RG Gen 2 4WD/SUV Flush Rail 5 dr	52102	RCL6	

IMPORTANT NOTES

- Do not operate sunroof

REGION	AUS	NZ	USA	CA	SA	UK	EU	ZA
AVAILABILITY	✓	✓	✗	✗	✗	✗	✗	✗
RUNNING DATES	2016 - 2020	2016 - 2020	-	-	-	-	-	-

UNDERBAR SPACING


BAR NO.	A	B	C	D	E	F	G
DIMENSION (CM)	-54.1	-30	16.3	38.4	52.1		
SPACERS REQ'D					QMVA10		
CONNECTOR	RCL		RCL		RCL		

VEHICLE LOAD LIMIT (VLL) (kg / lbs)	SYSTEM WEIGHT (SW) (kg / lbs)	ON-ROAD CARGO ALLOW. (OR)	OFF-ROAD CARGO ALLOW. (OFR)
Up to 100 / 220.5 *	28 / 61.7	OR = VLL - SW	OFR = OR / 1.5

***CHECK YOUR VEHICLE OWNERS HAND BOOK FOR VEHICLE MAXIMUM CARRYING CAPACITY. PLEASE ENSURE YOU USE THE VEHICLE MANUFACTURERS MAXIMUM ROOF ALLOWANCE IF IT IS LOWER THAN THE FIGURE LISTED IN THIS INSTRUCTION.**

NOTES FOR DEALERS / FITTERS

It is your responsibility to ensure these fitting instructions are given to the end user or client.

Document No: R2483
Issue No: 1
Issue Date: 09-Sep-21

These instructions remain the property of Rhino-Rack Australia Pty. Ltd. and may not be used or changed for any other purpose than intended.