

## RHINO-RACK | PIONEER VEHICLE FITTING INFORMATION

VEHICLE	PIONEER SIZE	CONNECTOR	HEIGHT ADDED (mm / in)
MITSUBISHI Pajero Sport KR/KS/QF Gen 3 4WD/SUV Flush Rail 5 dr	52102	RMPB3	132.0 / 5.2


## **IMPORTANT NOTES**

- Do not operate sunroof

REGION	AUS	NZ	USA	CA	SA	UK	EU	ZA
AVAILABILITY	<b>✓</b>	✓	×	×	×	×	×	✓
RUNNING DATES	2015 -	2015 -	-	-	-	-	-	2016 -

## **UNDERBAR SPACING**

CONNECTOR

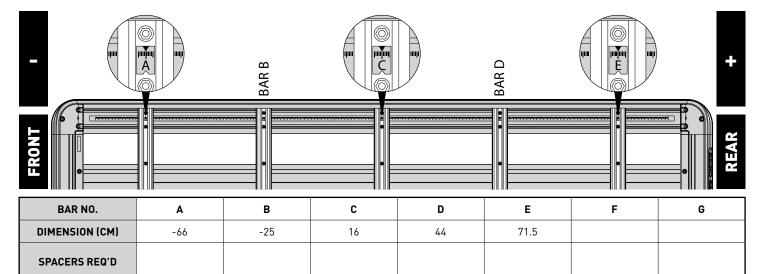

VEHICLE LOAD LIMIT (VLL) (kg / lbs)	SYSTEM WEIGHT (SW) (kg / lbs)	ON-ROAD CARGO ALLOW. (OR)	OFF-ROAD CARGO ALLOW. (OFR)	
Up to 80 / 176.4 *	32 / 70.5	OR = VLL - SW	OFR = OR / 1.5	

BACKBONE

\*CHECK YOUR VEHICLE OWNERS HAND BOOK FOR VEHICLE MAXIMUM CARRYING CAPACITY. PLEASE ENSURE YOU USE THE VEHICLE MANUFACTURERS MAXIMUM ROOF ALLOWANCE IF IT IS LOWER THAN THE FIGURE LISTED IN THIS INSTRUCTION.

## **NOTES FOR DEALERS / FITTERS**

BACKBONE

It is your responsibility to ensure these fitting instructions are given to the end user or client.

Document No: R2610 Issue Date: 29-Sep-20

These instructions remain the property of Rhino-Rack Australia Pty. Ltd. and may not be used or changed for any other purpose than intended.

BACKBONE

Page 1 of 1 rhinorack.com.au