

RHINO-RACK | PIONEER VEHICLE FITTING INFORMATION

VEHICLE	PIONEER SIZE	CONNECTOR	HEIGHT ADDED (mm / in)
CHEVROLET Silverado Crew Cab Gen 4 Pickup/Ute Bare Roof 4 dr	52113	RR5B1	99.2 / 3.9


IMPORTANT NOTES

- Do not operate sunroof

REGION	AUS	NZ	USA	CA	SA	UK	EU	ZA
AVAILABILITY	✓	✓	✓	✓	×	×	×	×
RUNNING DATES	2019 -	2019 -	2019 -	2019 -	-	-	-	-

UNDERBAR SPACING

CONNECTOR

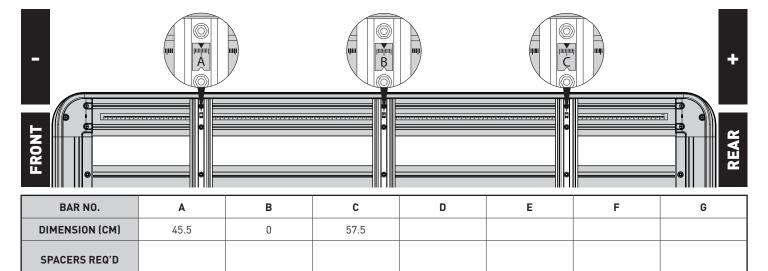

VEHICLE LOAD LIMIT (VLL) (kg / lbs)	SYSTEM WEIGHT (SW) (kg / lbs)	ON-ROAD CARGO ALLOW. (OR)	OFF-ROAD CARGO ALLOW. (OFR)	
Up to 100 / 220.5 *	30 / 66.1	OR = VLL - SW	0FR = 0R / 1.5	

BACKBONE

BACKBONE

BACKBONE

*CHECK YOUR VEHICLE OWNERS HAND BOOK FOR VEHICLE MAXIMUM CARRYING CAPACITY. PLEASE ENSURE YOU USE THE VEHICLE MANUFACTURERS MAXIMUM ROOF ALLOWANCE IF IT IS LOWER THAN THE FIGURE LISTED IN THIS INSTRUCTION.

NOTES FOR DEALERS / FITTERS

It is your responsibility to ensure these fitting instructions are given to the end user or client.

Document No: R2714 Issue Date: 12-Jan-21

These instructions remain the property of Rhino-Rack Australia Pty. Ltd. and may not be used or changed for any other purpose than intended.

Page 1 of 1 rhinorack.com