

RHINO-RACK | PIONEER VEHICLE FITTING INFORMATION

VEHICLE	PIONEER SIZE	CONNECTOR	HEIGHT ADDED (mm / in)
JEEP Wrangler JK 4WD/SUV Bare Roof 4 dr	52121	RJKB3+RCL4	88.9 / 3.5


IMPORTANT NOTES

- Do not operate sunroof

REGION	AUS	NZ	USA	CA	SA	UK	EU	ZA
AVAILABILITY	✓	✓	✓	✓	✓	×	×	×
RUNNING DATES	2007 - 2018	2007 - 2018	2007 - 2018	2007 - 2018	2011 - 2018	-	-	-

UNDERBAR SPACING

CONNECTOR

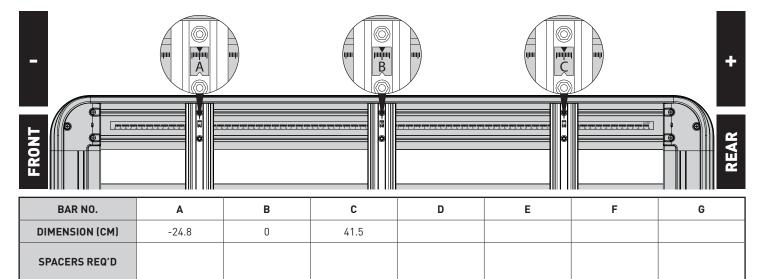

VEHICLE LOAD LIMIT (VLL) (kg / lbs)	SYSTEM WEIGHT (SW) (kg / lbs)	ON-ROAD CARGO ALLOW. (OR)	OFF-ROAD CARGO ALLOW. (OFR)	
Up to 100 / 220.5 *	19 / 41.9	OR = VLL - SW	OFR = OR / 1.5	

RCL

*CHECK YOUR VEHICLE OWNERS HAND BOOK FOR VEHICLE MAXIMUM CARRYING CAPACITY. PLEASE ENSURE YOU USE THE VEHICLE MANUFACTURERS MAXIMUM ROOF ALLOWANCE IF IT IS LOWER THAN THE FIGURE LISTED IN THIS INSTRUCTION.

NOTES FOR DEALERS / FITTERS

RCL

It is your responsibility to ensure these fitting instructions are given to the end user or client.

Document No: R2755 Issue Date: 19-Mar-21

These instructions remain the property of Rhino-Rack Australia Pty. Ltd. and may not be used or changed for any other purpose than intended.

Page 1 of 1 rhinorack.com