







VEHICLE				PIONEER	CONNECTOR	HEIGHT ADDED (mm/in)		
HONDA CR-V Gen 5 4WD/SUV Flush Rail 5 dr				52109	RHCB1	98.5 / 3.9		
VEHICLE NOTES	- Sunroof can be operated							
REGION	AUS	NZ	USA	CA	SA	UK	EU	ZA
AVAILABILITY	✓	✓	✓	✓	✓	✓	✓	✓
RUNNING DATES	2017 -	2017 -	2017 -	2017 -	2017 -	2018 -	2018 -	2017 -

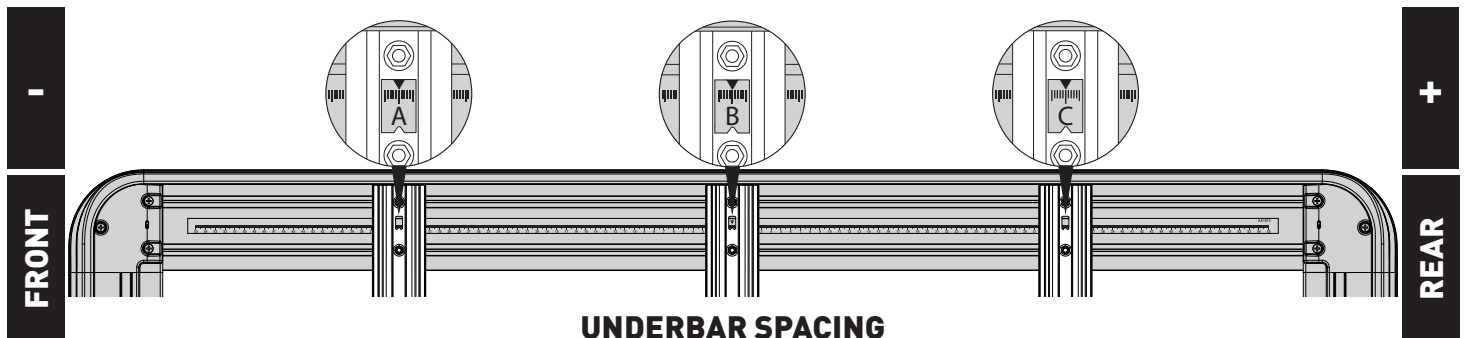
VISIT THE ONLINE CALCULATOR FOR CURRENT SYSTEM LOAD LIMIT DATA



DYNAMIC LOAD LIMIT (ON AND OFF-ROAD):
 *USE THE VEHICLE MANUFACTURER'S MAXIMUM ROOF ALLOWANCE IF IT IS LOWER THAN THE FIGURE LISTED

 CARGO	 SYSTEM WEIGHT	 LOAD LIMIT	OR	 Max kg
UP TO 98 Kg 216 lbs	+	22 Kg 49 lbs	=	UP TO 120 Kg 265 lbs
				*VEHICLE MANUFACTURER'S ROOF LOAD LIMIT


TOTAL STATIC LOAD LIMIT: UP TO 300 Kg / 661 lbs*



BAR NO.	A	B	C	D	E	F	G
DIMENSION (CM)	-42.5	0	42.5				
SPACERS REQ'D							
CONNECTOR	BACKBONE		BACKBONE				

NOTES FOR DEALERS / FITTERS

It is your responsibility to ensure these fitting instructions are given to the end user or client.