



VEHICLE					PIONEER	CONNECTOR		HEIGHT ADDED (mm/in)
LAND ROVER Defender 110 L663 4WD/SUV Factory Track 5 dr					52102	RCL6		98 / 3.9
VEHICLE NOTES	Centre of Front RCL leg positioned 65mm from front of track (Refer Leg supplement 520-RFI-00067). Can operate Glass sun roof. Do not operate fabric folding roof. -							
REGION	AUS	NZ	USA	CA	SA	UK	EU	ZA
AVAILABILITY	✓	✓	✓	✓	✓	✓	✓	✓
RUNNING DATES	2020 -	2020 -	2020 -	2020 -	2020 -	2020 -	2020 -	2020 -

VISIT THE ONLINE
CALCULATOR FOR
CURRENT SYSTEM
LOAD LIMIT DATA




DYNAMIC LOAD LIMIT (ON AND OFF-ROAD):

***USE THE VEHICLE MANUFACTURER'S MAXIMUM ROOF ALLOWANCE IF IT IS LOWER THAN THE FIGURE LISTED**



CARGO

UP TO **70 Kg**
154 lbs




SYSTEM WEIGHT

30 Kg
66 lbs

+


=




LOAD LIMIT

UP TO **100 Kg**
220 lbs


OR



***VEHICLE MANUFACTURER'S ROOF LOAD LIMIT**



TOTAL STATIC LOAD LIMIT: UP TO 250 Kg / 551 lbs*

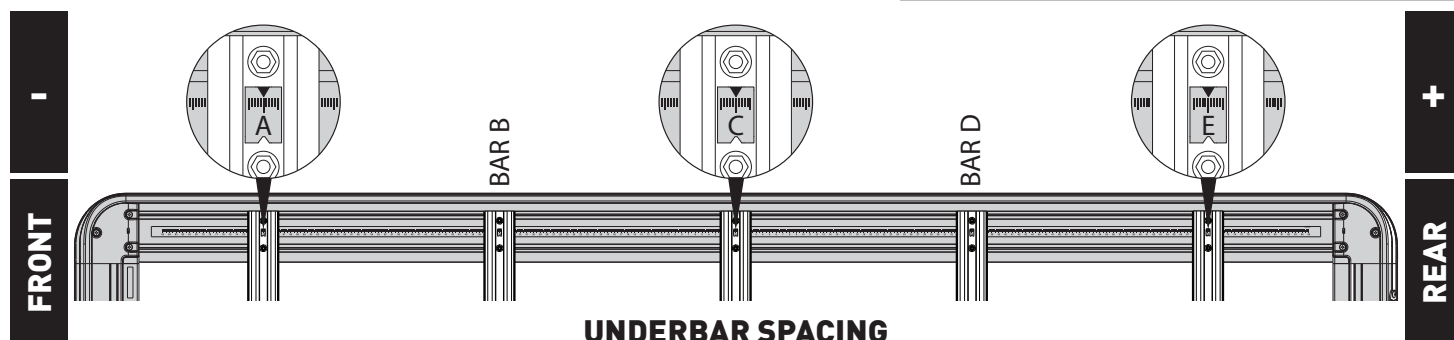

BAR NO.	A	B	C	D	E	F	G
DIMENSION (CM)	-55.8	-25.3	5.2	34	62.7		
SPACERS REQ'D					QMVA10		
CONNECTOR	RCL		RCL		RCL		

NOTES FOR DEALERS / FITTERS

It is your responsibility to ensure these fitting instructions are given to the end user or client.

These instructions remain the property of Rhino-Rack Australia Pty. Ltd. and may not be used or changed for any other purpose than intended.

Document No: R2857
Issue No: 1
Issue Date: 24-Jun-22
Page 1 of 1