



VEHICLE				PIONEER		CONNECTOR		HEIGHT ADDED (mm/in)	
ISUZU D-Max X-Terrain (w/Rails Removed) Gen 3 Pickup/Ute 4 dr				52109		RIDB2		93 / 3.7	
VEHICLE NOTES	Flush rail removal required, Refer to RIDB2 instructions. Do not operate sunroof								
REGION	AUS	NZ	USA	CA	SA	UK	EU	ZA	
AVAILABILITY	✓	✓	x	x	x	✓	✓	x	
RUNNING DATES	2020 -	2020 -	-	-	-	2021 -	2021 -	-	

VISIT THE ONLINE
CALCULATOR FOR
CURRENT SYSTEM
LOAD LIMIT DATA




DYNAMIC LOAD LIMIT (ON AND OFF-ROAD):

***USE THE VEHICLE MANUFACTURER'S MAXIMUM ROOF ALLOWANCE IF IT IS LOWER THAN THE FIGURE LISTED**



CARGO




SYSTEM WEIGHT

UP TO **95 Kg**
209 lbs

+


25 Kg
55 lbs

=




LOAD LIMIT

OR




UP TO **120 Kg**
265 lbs

***VEHICLE MANUFACTURER'S ROOF LOAD LIMIT**



TOTAL STATIC LOAD LIMIT: UP TO 300 Kg / 661 lbs*

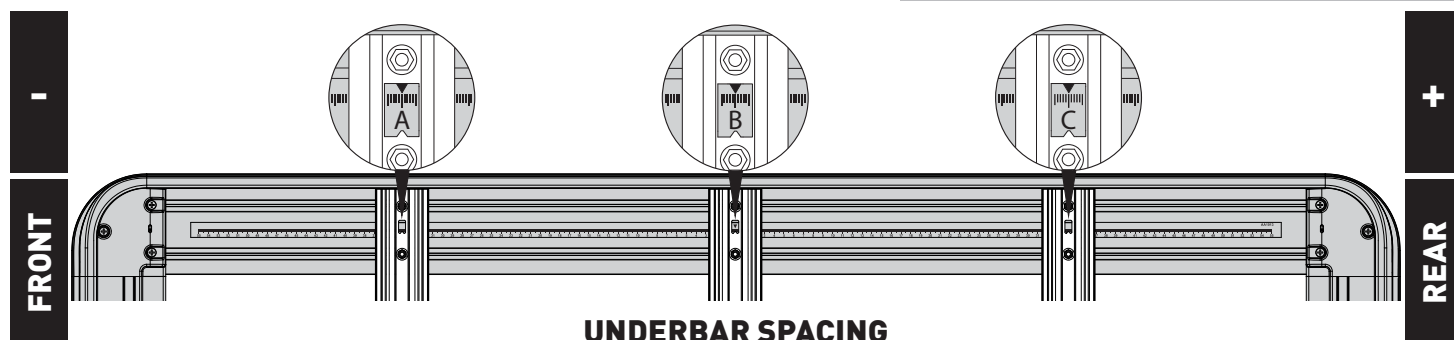

UNDERBAR SPACING

BAR NO.	A	B	C	D	E	F	G
DIMENSION (CM)	-48.5	0	48.5				
SPACERS REQ'D							
CONNECTOR	BACKBONE		BACKBONE				

NOTES FOR DEALERS / FITTERS

It is your responsibility to ensure these fitting instructions are given to the end user or client.

These instructions remain the property of Rhino-Rack Australia Pty. Ltd. and may not be used or changed for any other purpose than intended.

Document No: R2946
Issue No: 1
Issue Date: 15-Sep-21
Page 1 of 1