



VEHICLE					PIONEER	CONNECTOR	HEIGHT ADDED (mm/in)	
ISUZU MU-X RJ Gen 2 4WD/SUV 5 dr					52102	RIMB2	69 / 2.7	
VEHICLE NOTES	Compatible for bare roof and flush rail vehicles. - Use caution when operating sunroof							
REGION	AUS	NZ	USA	CA	SA	UK	EU	ZA
AVAILABILITY	✓	✓	x	x	x	✓	✓	✓
RUNNING DATES	2021 -	2021 -	-	-	-	2022 -	2022 -	2021 -

VISIT THE ONLINE  
CALCULATOR FOR  
CURRENT SYSTEM  
LOAD LIMIT DATA




**DYNAMIC LOAD LIMIT (ON AND OFF-ROAD):**

**\*USE THE VEHICLE MANUFACTURER'S MAXIMUM ROOF ALLOWANCE IF IT IS LOWER THAN THE FIGURE LISTED**



CARGO




SYSTEM WEIGHT

UP TO **118 Kg**  
**260 lbs**

**+**


**32 Kg**  
**71 lbs**

**=**



LOAD LIMIT


**OR**




Max kg

UP TO **150 Kg**  
**331 lbs**

**\*VEHICLE MANUFACTURER'S ROOF LOAD LIMIT**



**TOTAL STATIC LOAD LIMIT: UP TO 375 Kg / 827 lbs\***

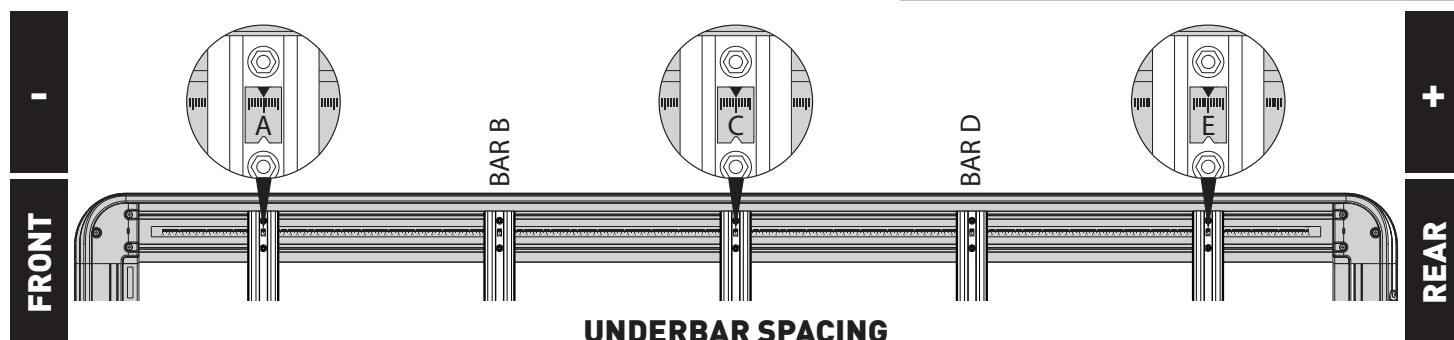

BAR NO.	A	B	C	D	E	F	G
DIMENSION (CM)	-82.2	-41.4	-0.6	40.2	81		
SPACERS REQ'D							
CONNECTOR	BACKBONE		BACKBONE		BACKBONE		

## NOTES FOR DEALERS / FITTERS

It is your responsibility to ensure these fitting instructions are given to the end user or client.

These instructions remain the property of Rhino-Rack Australia Pty. Ltd. and may not be used or changed for any other purpose than intended.

Document No: R3030  
Issue No: 2  
Issue Date: 28-Apr-22  
Page 1 of 1