
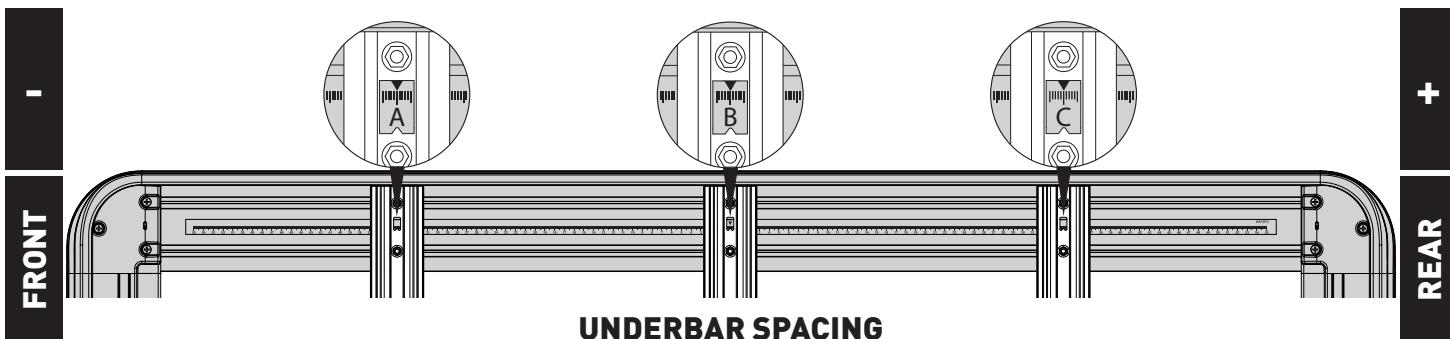
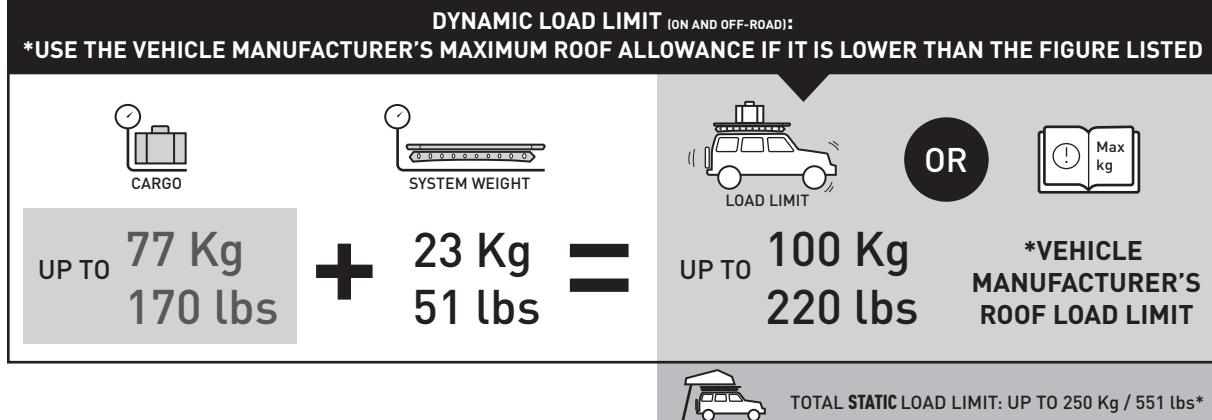


| VEHICLE | | | | | PIONEER | CONNECTOR | HEIGHT ADDED (mm/in) | |
|---|--|--------|--------|--------|---------|-----------|----------------------|--------|
| LAND ROVER Defender 110 L663 4WD/SUV Factory Track 5 dr | | | | | 52109 | RCL4 | 98 / 3.9 | |
| VEHICLE NOTES | Centre of Front RCL leg positioned 360mm from front of track [Refer Leg supplement 520-RFI-00067]. - Can operate Glass sun roof. Do not operate fabric folding roof. - | | | | | | | |
| REGION | AUS | NZ | USA | CA | SA | UK | EU | ZA |
| AVAILABILITY | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| RUNNING DATES | 2020 - | 2020 - | 2020 - | 2020 - | 2020 - | 2020 - | 2020 - | 2020 - |

VISIT THE ONLINE
CALCULATOR FOR
CURRENT SYSTEM
LOAD LIMIT DATA



UNDERBAR SPACING

| BAR NO. | A | B | C | D | E | F | G |
|-----------------------|-------|---|--------|---|---|---|---|
| DIMENSION (CM) | -37.5 | 0 | 37.5 | | | | |
| SPACERS REQ'D | | | QMVA05 | | | | |
| CONNECTOR | RCL | | RCL | | | | |

NOTES FOR DEALERS / FITTERS

It is your responsibility to ensure these fitting instructions are given to the end user or client.