


VEHICLE					PIONEER	CONNECTOR	HEIGHT ADDED (mm/in)	
LAND ROVER Defender 90 L663 4WD/SUV Factory Track 3 dr					52109	RCH2 / RCL2	125 / 4.9	
VEHICLE NOTES	Centre of Front RCL leg positioned 245mm from front of track (Refer Leg supplement 520-RFI-00167). Use caution when operating glass sun roof. Do not operate fabric folding roof. -							
REGION	AUS	NZ	USA	CA	SA	UK	EU	ZA
AVAILABILITY	✓	✓	✓	✓	✓	✓	✓	✓
RUNNING DATES	2021 -	2021 -	2020 -	2020 -	2021 -	2020 -	2020 -	2021 -

VISIT THE ONLINE
CALCULATOR FOR
CURRENT SYSTEM
LOAD LIMIT DATA



DYNAMIC LOAD LIMIT (ON AND OFF-ROAD):

***USE THE VEHICLE MANUFACTURER'S MAXIMUM ROOF ALLOWANCE IF IT IS LOWER THAN THE FIGURE LISTED**



CARGO



SYSTEM WEIGHT

UP TO **77 Kg**
169 lbs

+

23 Kg
51 lbs

=



LOAD LIMIT

OR




UP TO **100 Kg**
220 lbs

***VEHICLE MANUFACTURER'S ROOF LOAD LIMIT**



TOTAL STATIC LOAD LIMIT: UP TO 250 Kg / 551 lbs*

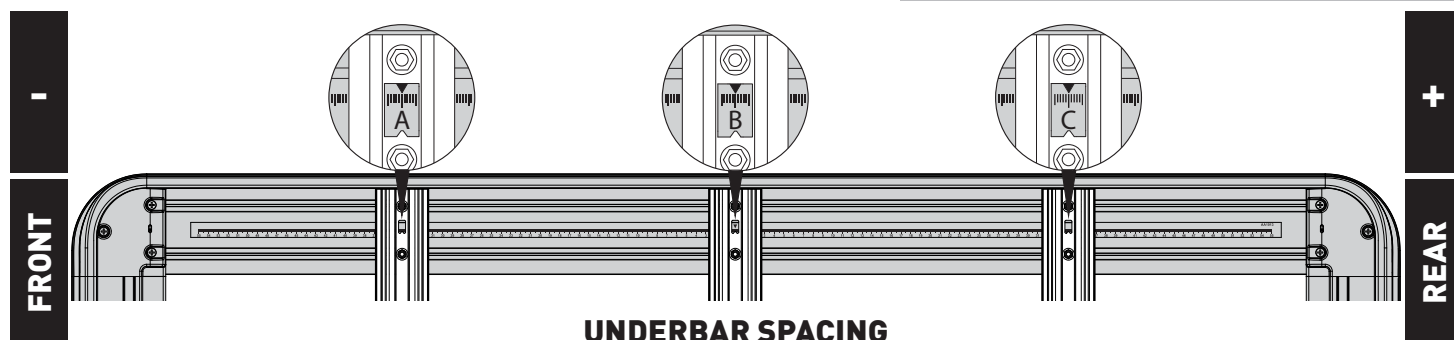

BAR NO.	A	B	C	D	E	F	G
DIMENSION (CM)	-34.6	5.5	45.4				
SPACERS REQ'D							
CONNECTOR	RCL		RCH				

NOTES FOR DEALERS / FITTERS

It is your responsibility to ensure these fitting instructions are given to the end user or client.

These instructions remain the property of Rhino-Rack Australia Pty. Ltd. and may not be used or changed for any other purpose than intended.

Document No: R3183
Issue No: 1
Issue Date: 26-Sep-23
Page 1 of 1