



# PIONEER VEHICLE FITTING INFORMATION

CONTROLLED


VEHICLE	PIONEER SIZE	CONNECTOR	HEIGHT ADDED (mm / in)
KIA Sorento UM Gen 3 4WD/SUV Flush Rail 4 dr	52100	RCL	130.0 / 5.1

## IMPORTANT NOTES

RCP68-BK required. Fixed point factory mount. -

REGION	AUS	NZ	USA	CA	SA	UK	EU	ZA
AVAILABILITY	✓	✓	✓	✓	✓	✓	✓	✓
RUNNING DATES	2015-2020 -	2015-2020 -	2016 - 2020	2016 - 2020	2016 - 2020	2015 - 2020	2015 - 2020	2015 - 2020

## UNDERBAR SPACING

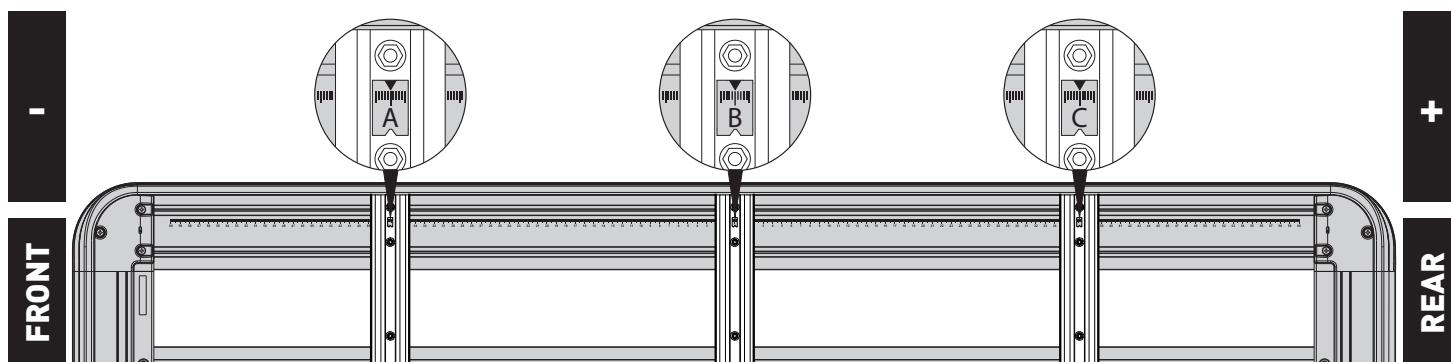

BAR NO.	A	B	C	D	E	F	G
DIMENSION (CM)	-45.8	0	45.8				
SPACERS REQ'D			QMVA10				
CONNECTOR	RCL		RCL				

VEHICLE LOAD LIMIT (VLL) (kg / lbs)	SYSTEM WEIGHT (SW) (kg / lbs)	ON-ROAD CARGO ALLOW. (OR)	OFF-ROAD CARGO ALLOW. (OFR)
Up to 100 / 220.5 *	19 / 41.9	OR = VLL - SW	OFR = OR / 1.5

\*CHECK YOUR VEHICLE OWNERS HAND BOOK FOR VEHICLE MAXIMUM CARRYING CAPACITY. PLEASE ENSURE YOU USE THE VEHICLE MANUFACTURERS MAXIMUM ROOF ALLOWANCE IF IT IS LOWER THAN THE FIGURE LISTED IN THIS INSTRUCTION.

## NOTES FOR DEALERS / FITTERS

It is your responsibility to ensure these fitting instructions are given to the end user or client.

Document No: R2539  
Issue No: 1  
Issue Date: 25-Jun-20

These instructions remain the property of Rhino-Rack Australia Pty. Ltd. and may not be used or changed for any other purpose than intended.