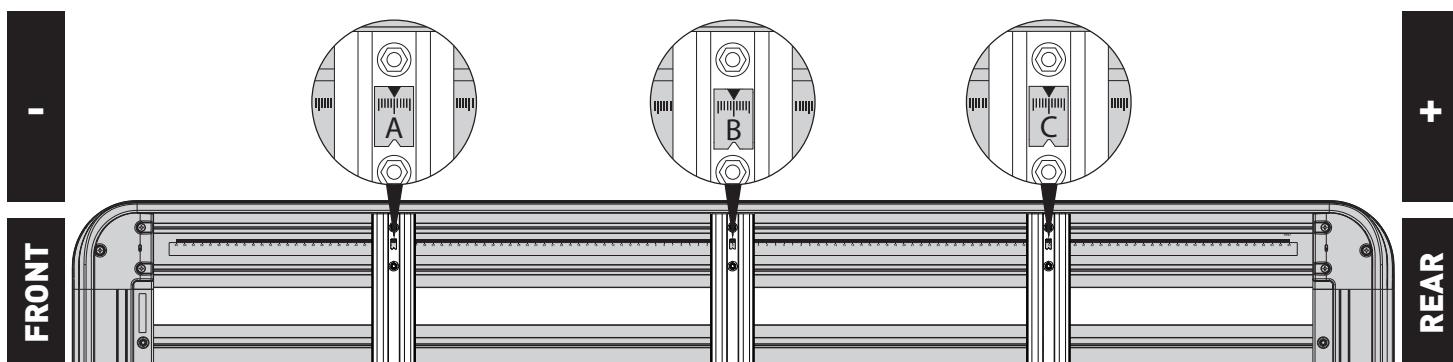


VEHICLE	PIONEER SIZE	CONNECTOR	HEIGHT ADDED (mm / in)
BMW X7/ X7 M G07 4WD/SUV Raised Rail 5 dr	52101	SX026	150.0 / 5.9

IMPORTANT NOTES

Safe to operate vehicle sun-roof -


REGION	AUS	NZ	USA	CA	SA	UK	EU	ZA
AVAILABILITY	✓	✓	✓	✓	✓	✓	✓	✓
RUNNING DATES	2019 -	2019 -	2019 -	2019 -	2019 -	2019 -	2019 -	2019 -

UNDERBAR SPACING


BAR NO.	A	B	C	D	E	F	G
DIMENSION (CM)	-40.5	0	39.5				
SPACERS REQ'D							
CONNECTOR	SX026		SX026				

VEHICLE LOAD LIMIT (VLL) (kg / lbs)	SYSTEM WEIGHT (SW) (kg / lbs)	ON-ROAD CARGO ALLOW. (OR)	OFF-ROAD CARGO ALLOW. (OFR)
Up to 80 / 176.4 *	23 / 50.7	OR = VLL - SW	OFR = OR / 1.5

***CHECK YOUR VEHICLE OWNERS HAND BOOK FOR VEHICLE MAXIMUM CARRYING CAPACITY. PLEASE ENSURE YOU USE THE VEHICLE MANUFACTURERS MAXIMUM ROOF ALLOWANCE IF IT IS LOWER THAN THE FIGURE LISTED IN THIS INSTRUCTION.**

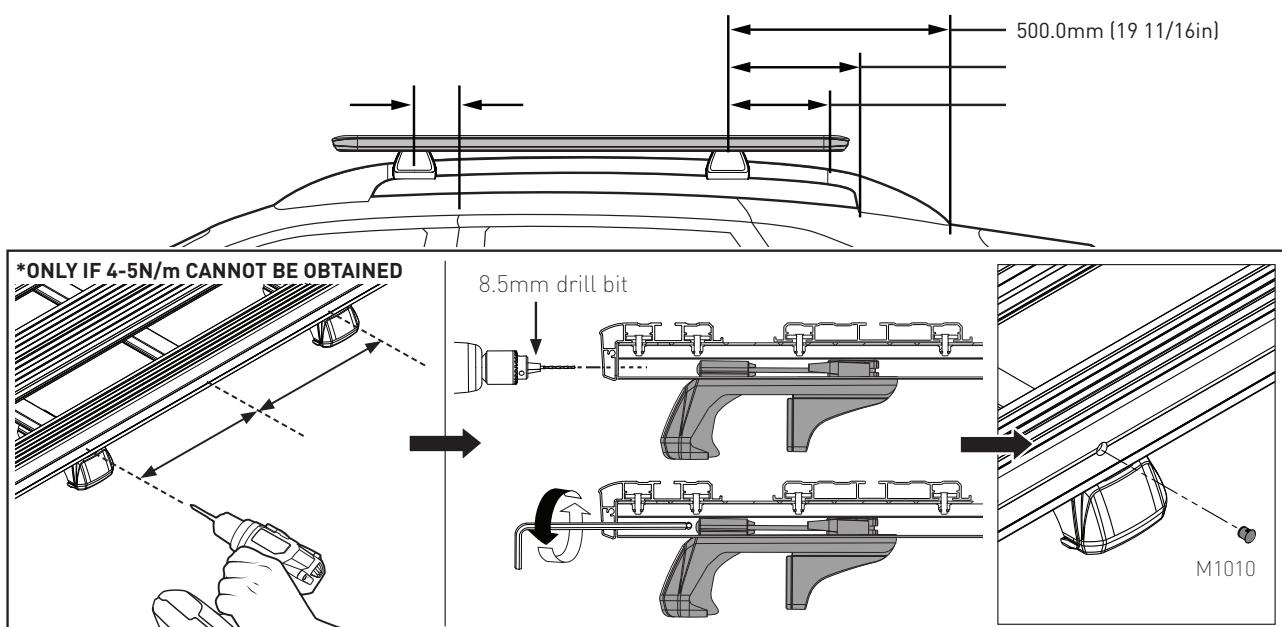
NOTES FOR DEALERS / FITTERS

It is your responsibility to ensure these fitting instructions are given to the end user or client.

Document No: R2591
 Issue No: 1
 Issue Date: 14-Jul-20

These instructions remain the property of Rhino-Rack Australia Pty. Ltd. and may not be used or changed for any other purpose than intended.