


VEHICLE	PIONEER SIZE	CONNECTOR	HEIGHT ADDED (mm / in)
BMW X4/ X4 M Gen 2 4WD/SUV Flush Rail 5 dr	52101	SX026	110.0 / 4.3

IMPORTANT NOTES	Safe to operate vehicle sun-roof -
-----------------	------------------------------------

REGION	AUS	NZ	USA	CA	SA	UK	EU	ZA
AVAILABILITY	✓	✓	✓	✓	✓	✓	✓	✓
RUNNING DATES	2018 -	2018 -	2019 -	2019 -	2019 -	2018 -	2018 -	2019 -


UNDERBAR SPACING

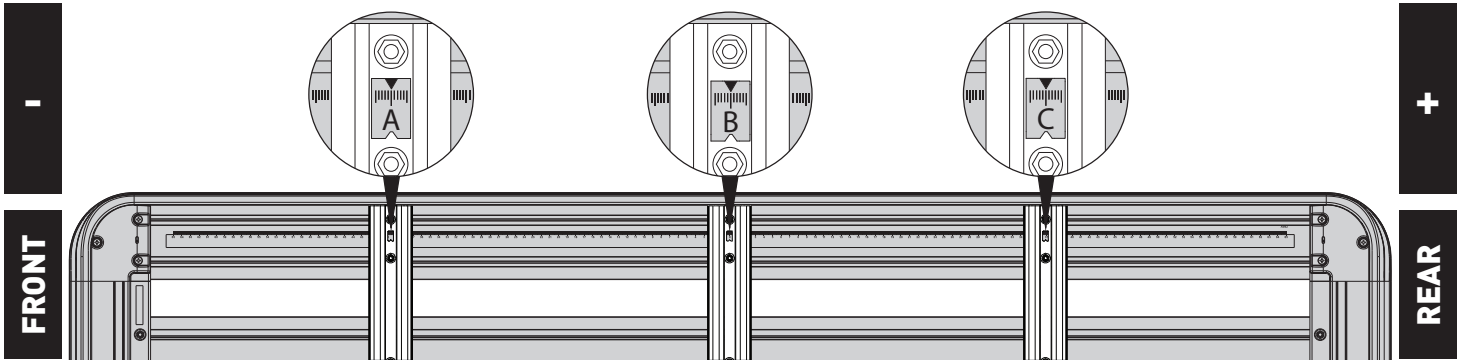

BAR NO.	A	B	C	D	E	F	G
DIMENSION (CM)	-40.5	0	34.5				
SPACERS REQ'D							
CONNECTOR	SX026		SX026				

VEHICLE LOAD LIMIT (VLL) (kg / lbs)	SYSTEM WEIGHT (SW) (kg / lbs)	ON-ROAD CARGO ALLOW. (OR)	OFF-ROAD CARGO ALLOW. (OFR)
Up to 75 / 165.3 *	23 / 50.7	OR = VLL - SW	OFR = OR / 1.5

*CHECK YOUR VEHICLE OWNERS HAND BOOK FOR VEHICLE MAXIMUM CARRYING CAPACITY. PLEASE ENSURE YOU USE THE VEHICLE MANUFACTURERS MAXIMUM ROOF ALLOWANCE IF IT IS LOWER THAN THE FIGURE LISTED IN THIS INSTRUCTION.

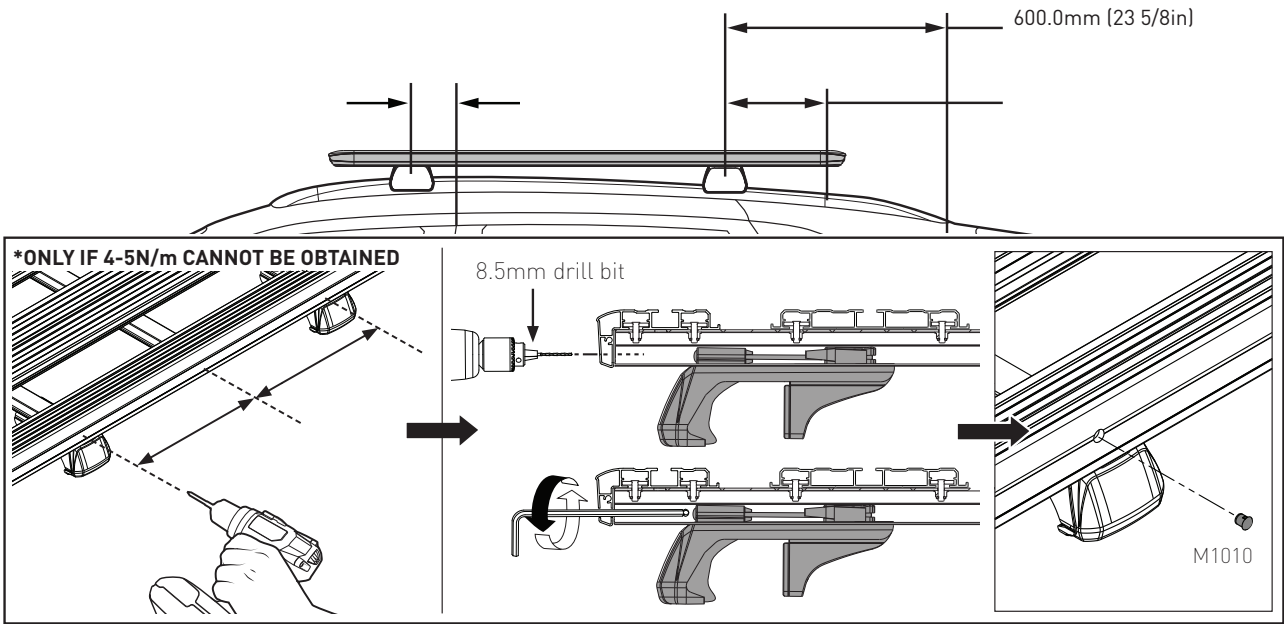

NOTES FOR DEALERS / FITTERS
It is your responsibility to ensure these fitting instructions are given to the end user or client.

Document No: R2593
Issue No: 1
Issue Date: 14-Jul-20
These instructions remain the property of Rhino-Rack Australia Pty. Ltd. and may not be used or changed for any other purpose than intended.