



RHINO-RACK

Aerodynamic & Heavy Duty Roof Rack Systems


RHLTL - Rhino High Level Tail Light Bracket

Important: Please read these instructions carefully prior to installation. Please refer to your fitting instruction to ensure that the roof racks are installed in the correct locations. Check the contents of kit before commencing fitment and report any discrepancies. Place these instructions in the vehicle's glove box after installation is complete.

Care Instruction: Clean the cross bars prior to fitting the RHLTL Attachment.


Parts List

Item	Component Name	Qty	Part No.
1	Light Bracket	2	C672
2	M8 x 25mm Hex Bolt	2	B101
3	M8 Flat Washer	2	W020
4	M8 Shakeproof Washer	2	W033
5	M8 Channel Nut	2	N003
6	Fitting Instruction	1	RS-352

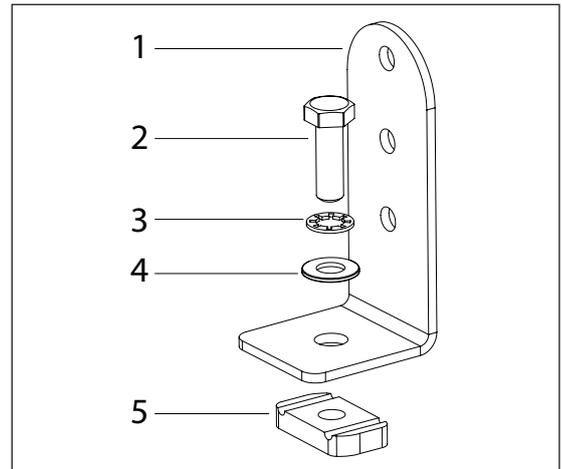


1 High Level Light Bracket Cross bar fitment:

Remove cross bar rubber. Assemble Light Brackets as shown below. **Channel must lie fully across the cross bar when tight.** Tighten to 3-4 Nm.

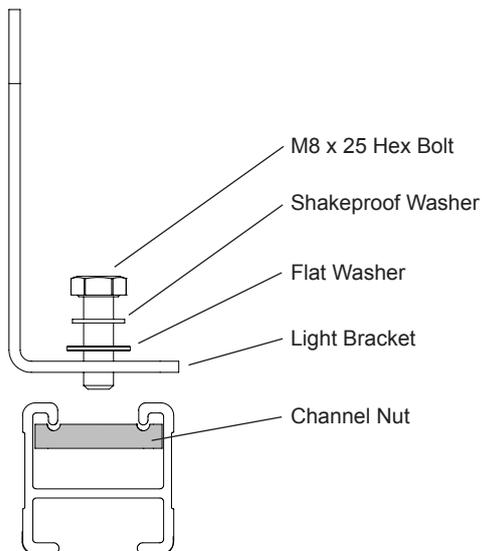

2 Re-fit cross bar rubber:

Once the brackets are secured, cut the cross bar rubber to neatly fill the gaps between each bracket.

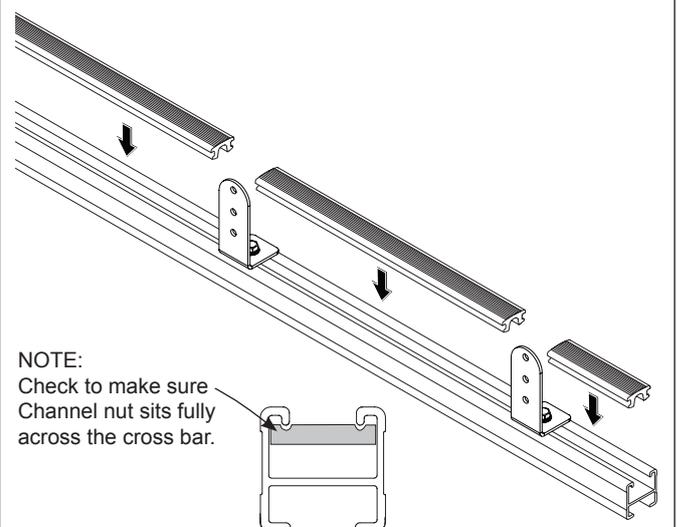

Rhino-Rack
3 Pike Street, Rydalmere,
NSW 2116, Australia.
(Ph) (02) 9638 4744
(Fax) (02) 9638 4822

Document No: RS-352
Prepared By: Craig Jones
Authorised By: Gary England

Issue No: 01
Issue Date: 14/08/2008

These instructions remain the property of Rhino-Rack Australia Pty Ltd and may not be used or changed for any other purpose than intended.