



## **DK019 Rhino-Rack** VA, Aero, Euro & HD crossbar instruction

## **IDENTIFICATION CHART**









VA crossbar

AERO crossbar

EURO crossbar

HD crossbar

			FRONT CROSSBAR					REAR CROSSBAR						
					VA	AERO EURO	HD				VA	AERO EURO	<b>II</b> D	(Partie)
Vehicle	Date	Crossbar	Front Right Pad/ Clamp	Front Left Pad/ Clamp	Measurement strip length per side	Measurement strip length per side	Measurement Distance ( x )	Foot plate arrow direction	Rear Right Pad/ Clamp	Rear Left Pad/ Clamp	Measurement strip length per side	Measurement strip length per side	Measurement Distance ( x )	Foot plate arrow direction
Lexus GS 4dr Sedan	2005 on	1180mm	M365 SUB0149 207mm		152mm	982mm / 38,21/32"	OUT	114	M365 14494 201mm		146mm	970mm / 38,3/16"	OUT	
			Arrow FORWARD			00,2 1/02		Arr FORV				30,0.10		




## DK019 Rhino-Rack VA, Aero, Euro & HD crossbar instruction


Measurement A: CENTRE of door jamb to CENTRE arrow of leg foot plate.

**Measurement B**: CENTRE of Front leg foot plate arrow to CENTRE of Rear leg foot plate arrow.

Carrying capacity: Roof rack is rated to 75kg. Please refer to manufacturers handbook for your vehicles maximum roof load capacity. Always use the lower of the two figures.

If your vehicle is not listed on this fitting instruction please refer to your countries Rhino-Rack web site for the latest information.

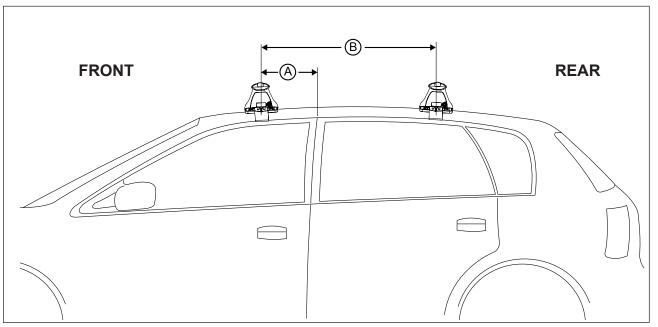

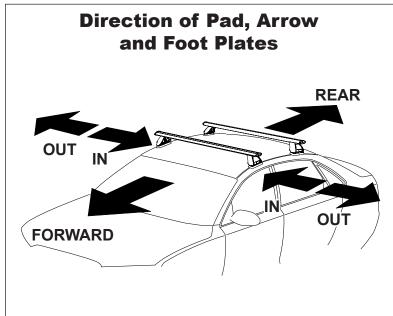

VEHICLE	Date	Measurement A	Measurement B	Load Rating (includes racks 5kg/ 11lbs)
Lexus GS 4dr Sedan	2005 on	300mm / 11,13/16"	700mm / 27,9/16"	75kg / 165lbs

Document No. RS191 Issue Date: 19 September 2013 Page 2 of 2