




DK224 Rhino-Rack VA, Aero, Euro & HD crossbar instruction



Vehicle	Date	Crossbar	FRONT CROSSBAR					REAR CROSSBAR						
			Front Right Pad/ Clamp	Front Left Pad/ Clamp	Measurement strip length per side	Measurement strip length per side	Measurement Distance (x)	Foot plate arrow direction	Rear Right Pad/ Clamp	Rear Left Pad/ Clamp	Measurement strip length per side	Measurement strip length per side	Measurement Distance (x)	Foot plate arrow direction
Buick Enclave SUV	2008 on	1375mm	M504 SUB0362	M503 SUB0362	179mm	124mm	1121mm / 44,9/64"	OUT	M503 SUB0196	M504 SUB0196	169mm	114mm	1101mm / 43,11/32"	OUT
			Arrow OUT						Arrow OUT					

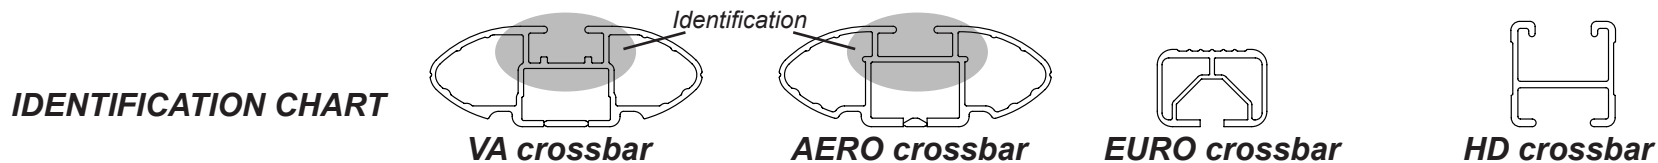

DK224 Rhino-Rack VA, Aero, Euro & HD crossbar instruction




Measurement A: CENTRE of door jamb to CENTRE arrow of leg foot plate.

Measurement B: CENTRE of Front leg foot plate arrow to CENTRE of Rear leg foot plate arrow.

Carrying capacity: Roof rack is rated to 75kg. Please refer to manufacturers handbook for your vehicles maximum roof load capacity. Always use the lower of the two figures.

If your vehicle is not listed on this fitting instruction please refer to your countries Rhino-Rack web site for the latest information.

Pad M503 FRONT Left of vehicle - Arrow facing outward.
 Pad M504 FRONT Right of vehicle - Arrow facing outward.
 Pad M503 REAR Right of vehicle - Arrow facing outward.
 Pad M504 REAR Left of vehicle - Arrow facing outward.

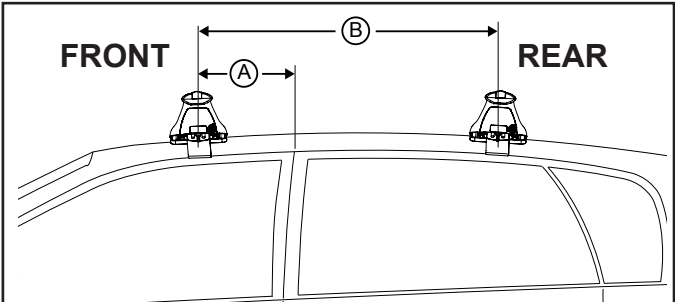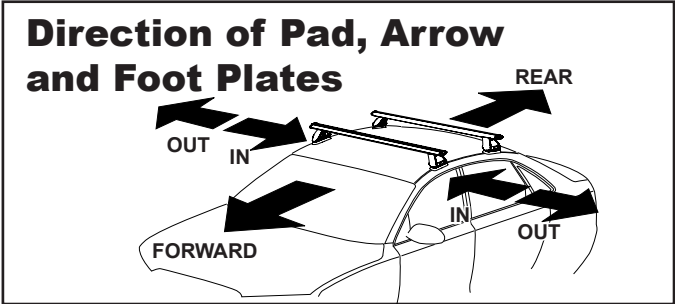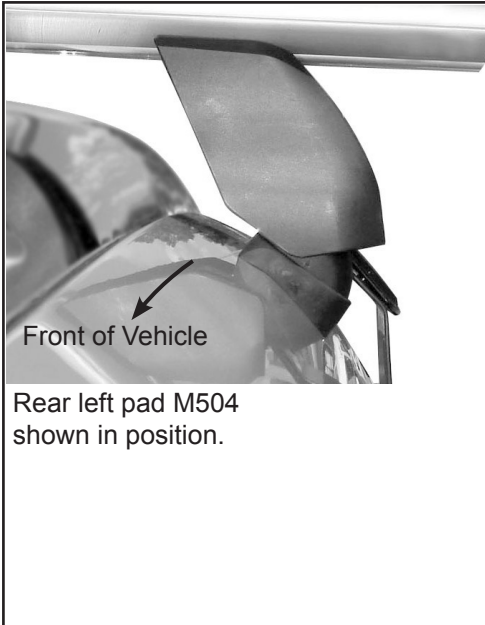

VEHICLE	Date	Measurement A	Measurement B	Load Rating (includes racks 5kg/ 11lbs)
Buick Enclave SUV	2008 on	100mm / 3,15/16"	700mm / 27,9/16"	60kg / 132lbs