


DK246 Rhino-Rack VA, Aero, Euro & HD crossbar instruction









IDENTIFICATION CHART

VA crossbar AERO crossbar

EURO crossbar

HD crossbar

		_				VA Cros	รมส า	AERU	Crossba	ti i	EURU cros	<u> </u>	HD Cross	Dai
			FRONT CROSSBAR								REAR	CROSSBAR		
			V		VA	AERO EURO	HD	Residence			VA VA	AERO EURO	HD	
Vehicle	Date	Crossbar	Front Right Pad/ Clamp	Front Left Pad/ Clamp	Measurement strip length per side	Measurement strip length per side	Measurement Distance (x)	Foot plate arrow direction	Rear Right Pad/ Clamp	Rear Left Pad/ Clamp	Measurement strip length per side	Measurement strip length per side	Measurement Distance (x)	Foot plate arrow direction
Volvo XC60 4dr SUV	2009-	1260mm	M366 SUB0264	M366 SUB0264	198mm	85mm	1044mm / 41,7/64"	OUT	M366 SUB0196	M366 SUB0196	187mm	74mm	1022mm / 40,15/64"	OUT
			Arrow FORWARD				41,7704		Arro FORW				10,10/07	
			_											




DK246 Rhino-Rack VA, Aero, Euro & HD crossbar instruction


Measurement A: CENTRE of door jamb to CENTRE arrow of leg foot plate.


Measurement B: CENTRE of Front leg foot plate arrow to CENTRE of Rear leg foot plate arrow.

Carrying capacity: Roof rack is rated to 75kg. Please refer to manufacturers handbook for your vehicles maximum roof load capacity. Always use the lower of the two figures.

If your vehicle is not listed on this fitting instruction please refer to your countries Rhino-Rack web site for the latest information.





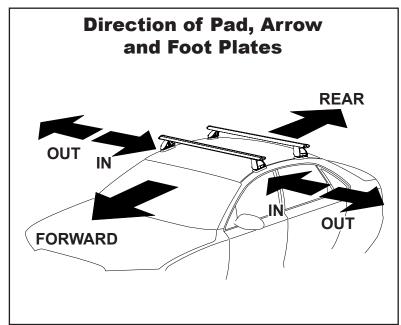

VEHICLE	Date	Measurement A	Measurement B	Load Rating (includes racks 5kg/ 11lbs)
Volvo XC60 4dr SUV	2009-	70mm / 2,3/4"	680mm / 26,49/64"	75kg / 165lbs

Document No. R030 Issue Date: 23 December 2013 Page 2 of 2