



## **DK249 Rhino-Rack** VA, Aero, Euro & HD crossbar instruction









## **IDENTIFICATION CHART**

VA crossbar AERO crossbar

EURO crossbar HL

HD crossbar

		<u>-</u>							crossdar Euro crossdar HD crossdar					
F				FRONT	RONT CROSSBAR					REAR CROSSBAR				
					VA	AERO EURO	HD				VA	AERO EURO	<b>ID</b>	
Vehicle	Date	Crossbar	Front Right Pad/ Clamp	Front Left Pad/ Clamp	Measurement strip length per side	Measurement strip length per side	Measurement Distance ( x )	Foot plate arrow direction	Rear Right Pad/ Clamp	Rear Left Pad/ Clamp	Measurement strip length per side	Measurement strip length per side	Measurement Distance ( x )	Foot plate arrow direction
Audi Q7 4dr SUV	2006 on	1375mm	M367 SUB0371	M367 SUB0371	183mm	128mm	1129mm / 44,29/64"	OUT	M367 SUB0371	M367 SUB0371	187mm	132mm	1137mm / 44,49/64"	OUT
			Arrow FORWARD				44,29/04		Arro FORV				44,49/04	




## DK249 Rhino-Rack VA, Aero, Euro & HD crossbar instruction


Measurement A: CENTRE of door jamb to CENTRE arrow of leg foot plate.

**Measurement B**: CENTRE of Front leg foot plate arrow to CENTRE of Rear leg foot plate arrow.

Carrying capacity: Roof rack is rated to 75kg. Please refer to manufacturers handbook for your vehicles maximum roof load capacity. Always use the lower of the two figures.

If your vehicle is not listed on this fitting instruction please refer to your countries Rhino-Rack web site for the latest information.

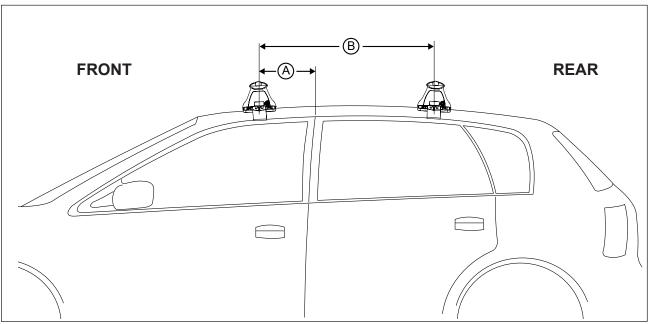

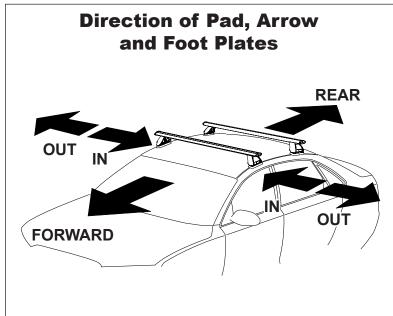

VEHICLE	Date	Measurement A	Measurement B	Load Rating (includes racks 5kg/ 11lbs)
Audi Q7 4dr SUV	2006 on	140mm / 5,33/64"	750mm / 29,17/32"	75kg / 165lbs

Document No. R042 Issue Date: 20 December 2013 Page 2 of 2