





DK345 Rhino-Rack VA, DA, Euro & HD crossbar instruction


IDENTIFICATION CHART

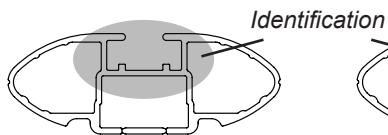


VA crossbar

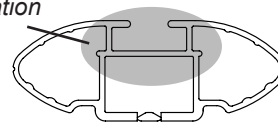

DA crossbar



EURO crossbar



HD crossbar

Vehicle	Date	Crossbar	FRONT CROSSBAR						REAR CROSSBAR					
			Front Right Pad/ Clamp	Front Left Pad/ Clamp	Measurement strip length per side	Measurement strip length per side	Measurement Distance (x)	Foot plate arrow direction	Rear Right Pad/ Clamp	Rear Left Pad/ Clamp	Measurement strip length per side	Measurement strip length per side	Measurement Distance (x)	Foot plate arrow direction
Audi A5, S5 5dr sportback 8T	10-	1260mm	142612	142612	193mm	80mm	1034mm / 40,45/64"	OUT	M366	M366	185mm	72mm	1018mm / 40,5/64"	OUT
			114546	114547					114410	114409				
			Arrow FORWARD						Arrow FORWARD					








DK345 Rhino-Rack VA, DA, Euro & HD crossbar instruction

Measurement A: CENTRE of door jamb to CENTRE arrow of leg foot plate.

Measurement B: CENTRE of Front leg foot plate arrow to CENTRE of Rear leg foot plate arrow.

Carrying capacity: Roof rack is rated to 75kg. Please refer to manufacturers handbook for your vehicles maximum roof load capacity. Always use the lower of the two figures.

If your vehicle is not listed on this fitting instruction please refer to your countries Rhino-Rack web site for the latest information.

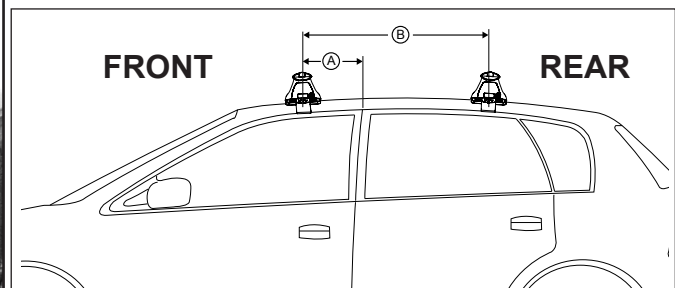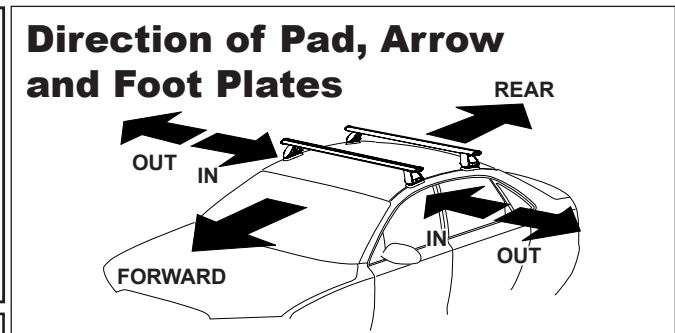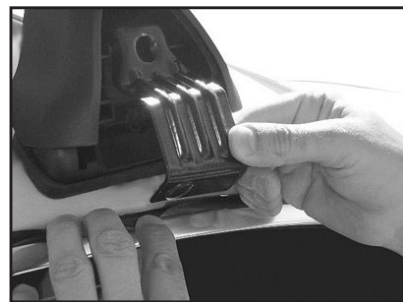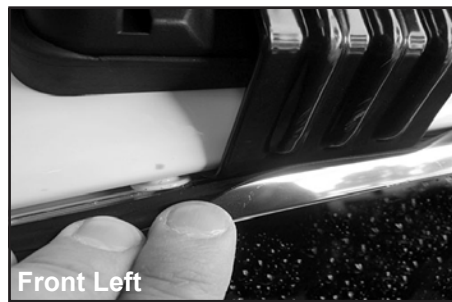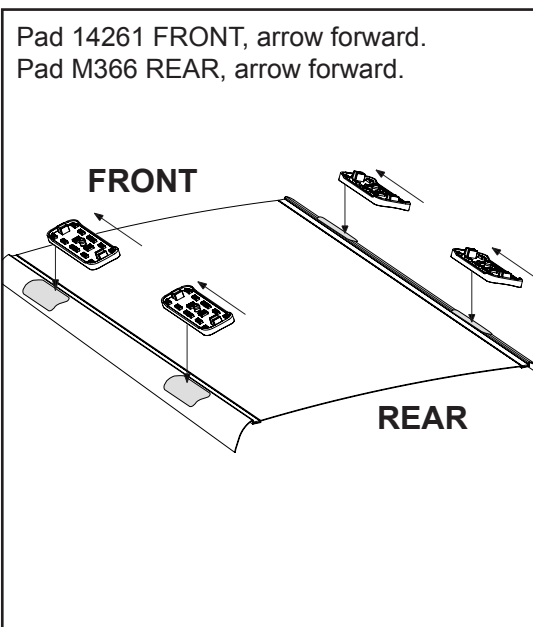

VEHICLE	Date	Measurement A	Measurement B	Load Rating (includes racks 5kg/11lbs)
Audi A5, S5 5dr sportback 8T	10-	310mm / 12,7/32"	700mm / 27,9/16"	75kg / 165lbs