






IDENTIFICATION CHART



VA crossbar



EURO crossbar



HD crossbar

FRONT CROSSBAR

Vehicle	Date	Crossbar	FRONT CROSSBAR					FRONT CROSSBAR						
			Front Right Pad/ Clamp	Front Left Pad/ Clamp	Measurement strip length per side	Measurement strip length per side	Measurement Distance (x)	Foot plate arrow direction	Rear Right Pad/ Clamp	Rear Left Pad/ Clamp	Measurement strip length per side	Measurement strip length per side	Measurement Distance (x)	Foot plate arrow direction
Acura RLX 4dr sedan	2014-	1375mm	M367 SUB0172		176mm	121mm	1115mm / 43,57/64"	OUT	M367 SUB0146		168mm	113mm	1099mm / 43,17/64"	OUT
			Pad Arrow FORWARD						Pad Arrow FORWARD					



DK354 Rhino-Rack VA, DA, Euro & HD crossbar instruction


CONTROLLED

Measurement A: CENTRE of door jamb to CENTRE arrow of leg foot plate.

Measurement B: CENTRE of Front leg foot plate arrow to CENTRE of Rear leg foot plate arrow.

Carrying capacity: Roof rack is rated to 75kg. Please refer to manufacturers handbook for your vehicles maximum roof load capacity. Always use the lower of the two figures.



If your vehicle is not listed on this fitting instruction please refer to your countries Rhino-Rack web site for the latest information.

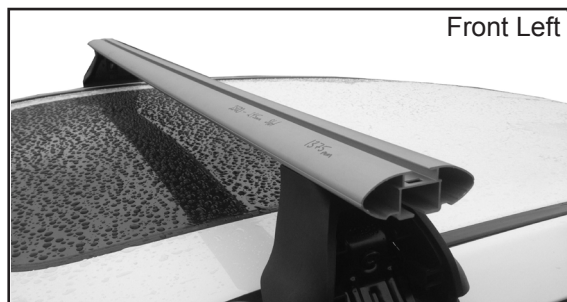

Front Left



Rear Left

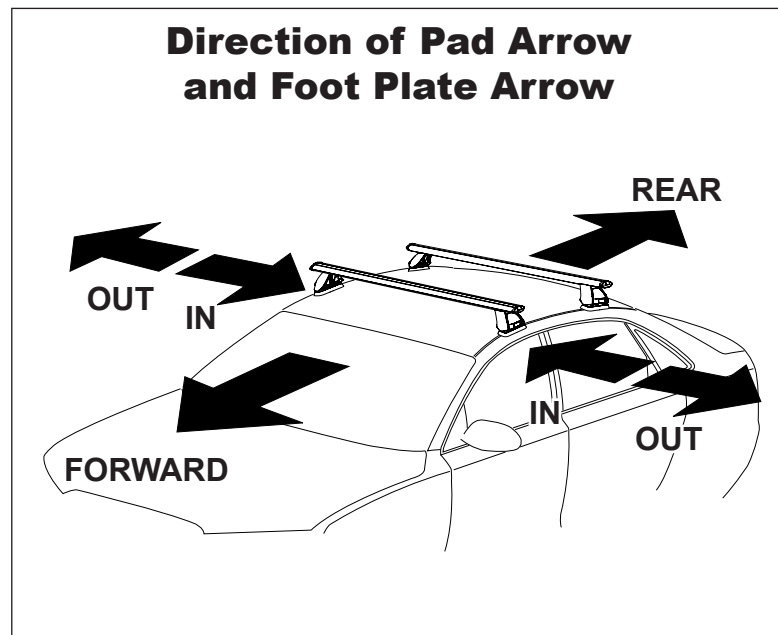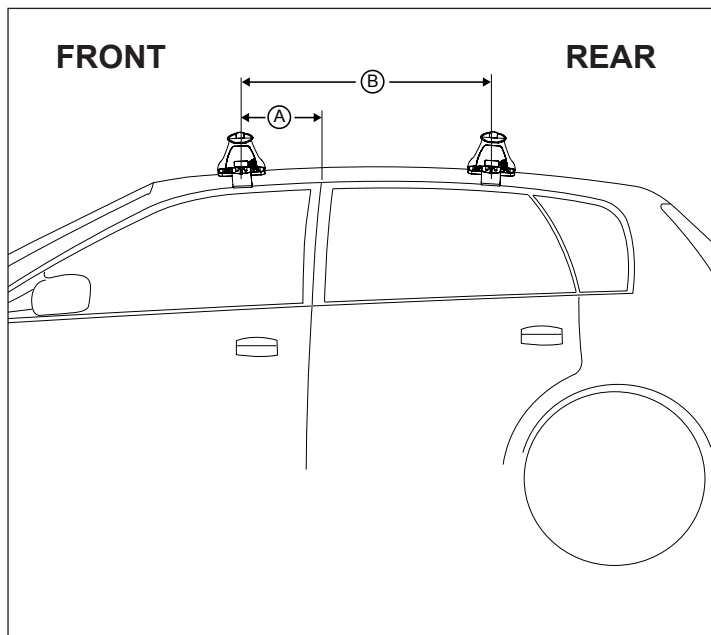

VEHICLE	Date	Measurement A	Measurement B	Load Rating (includes racks 5kg/ 11lbs)
Acura RLX 4dr sedan	2014-	150mm / 5,29/32"	700mm / 27,9/16"	60kg / 132lbs