





FRONT **REAR**

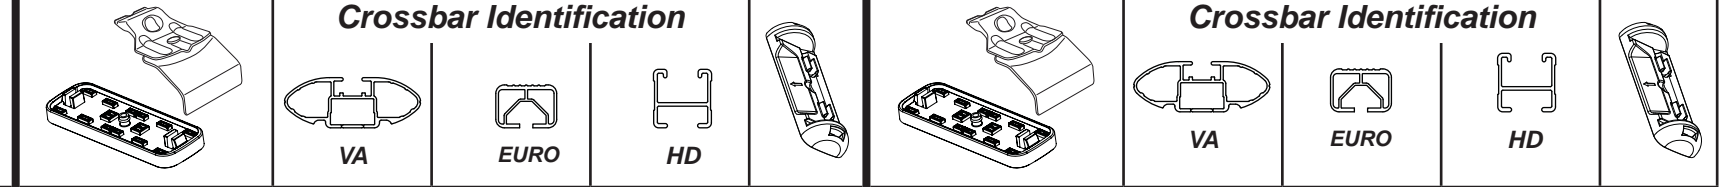

Vehicle	Date	Crossbar	FRONT					REAR						
			Front Left Pad/Clamp	Front Right Pad/Clamp	Measurement strip length per side	Measurement strip length per side	Measurement Distance (x)	Foot plate arrow direction	Rear Left Pad/Clamp	Rear Right Pad/Clamp	Measurement strip length per side	Measurement strip length per side	Measurement Distance (x)	Foot plate arrow direction
FORD Kuga 4dr SUV	(AU, NZ) 13-16	1375mm	142609 SUB0460	142609 SUB0460	144mm	89mm	1051mm / 41,3/8"	OUT	M367 SUB0372	M367 SUB0372	120mm	65mm	1003mm / 39,31/64"	OUT
	13-		Pad Arrow FORWARD						Pad Arrow FORWARD					
FORD Escape 4dr SUV	(AU, NZ) 17-	1375mm	Pad Arrow FORWARD		144mm	89mm	1051mm / 41,3/8"	OUT	Pad Arrow FORWARD		120mm	65mm	1003mm / 39,31/64"	OUT
	13-													

Table above refers to Direction of Pad Arrow and Foot Plate Arrow when fitted on the vehicle.

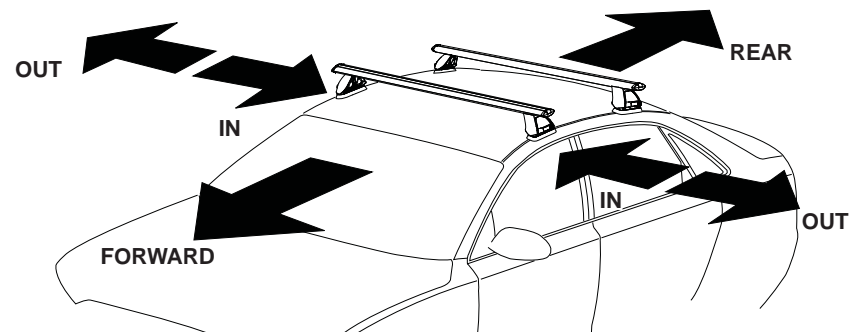



Rhino-Rack 2500 Series - DK375 and RS576 instruction


CONTROLLED

Measurement A: CENTRE of door jamb to CENTRE arrow of leg foot plate.

Measurement B: CENTRE of Front leg foot plate arrow to CENTRE of Rear leg foot plate arrow.

Carrying capacity: Roof rack is rated up to 75kg. Please refer to manufacturers handbook for your vehicles maximum roof load capacity. Always use the lower of the two figures.

If your vehicle is not listed on this fitting instruction please refer to your countries Rhino-Rack web site for the latest information.

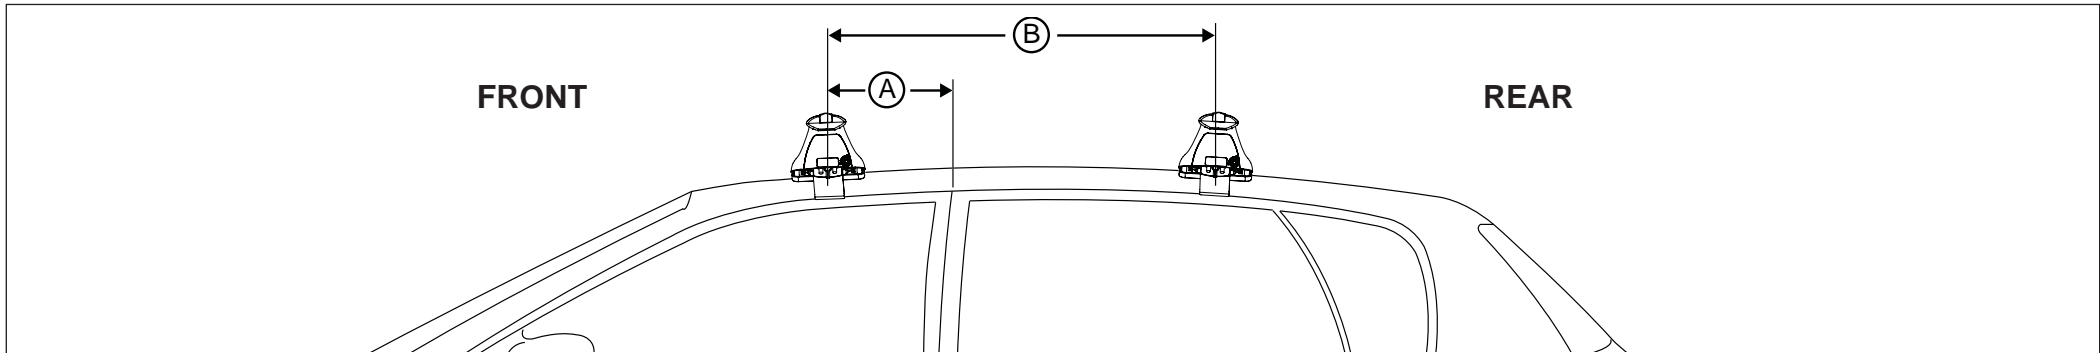

VEHICLE	Date	Measurement A	Measurement B	Load Rating up to (includes racks 5kg/ 11lbs)
FORD Kuga 4dr SUV	(AU, NZ) 13-16	130mm / 5,1/8"	700mm / 27,9/16"	75kg / 165lbs
	13-			
FORD Escape 4dr SUV	(AU, NZ) 17-			
	13-			