






**CROSSBAR IDENTIFICATION**



**VA crossbar**



**EURO crossbar**



**HD crossbar**

Vehicle	Date	Crossbar	FRONT CROSSBAR					REAR CROSSBAR						
			Front Right Pad/Clamp	Front Left Pad/Clamp	Measurement strip length per side	Measurement strip length per side	Measurement Distance ( x )	Foot plate arrow direction	Rear Right Pad/Clamp	Rear Left Pad/Clamp	Measurement strip length per side	Measurement strip length per side	Measurement Distance ( x )	Foot plate arrow direction
ACURA TLX 4dr Sedan 1st Gen	15-	1260mm	142617 SUB0145	142617 SUB0145	197mm	84mm	1042mm / 41,1/32"	OUT	142649 SUB0380	142650 SUB0380	187mm	74mm	1022mm / 40,15/64"	OUT
			Pad Arrow IN						Pad Arrow IN					



# Rhino Rack 2500 Series - DK431 instruction

**CONTROLLED**



**Measurement A:** CENTRE of door jamb to CENTRE arrow of leg foot plate.

**Measurement B:** CENTRE of Front leg foot plate arrow to CENTRE of Rear leg foot plate arrow.

**Carrying capacity:** Roof rack is rated up to 75kg. Please refer to manufacturers handbook for your vehicles maximum roof load capacity. Always use the lower of the two figures.

If your vehicle is not listed on this fitting instruction please refer to your countries Rhino-Rack web site for the latest information.

## Direction of Pad Arrow and Foot Plate Arrow

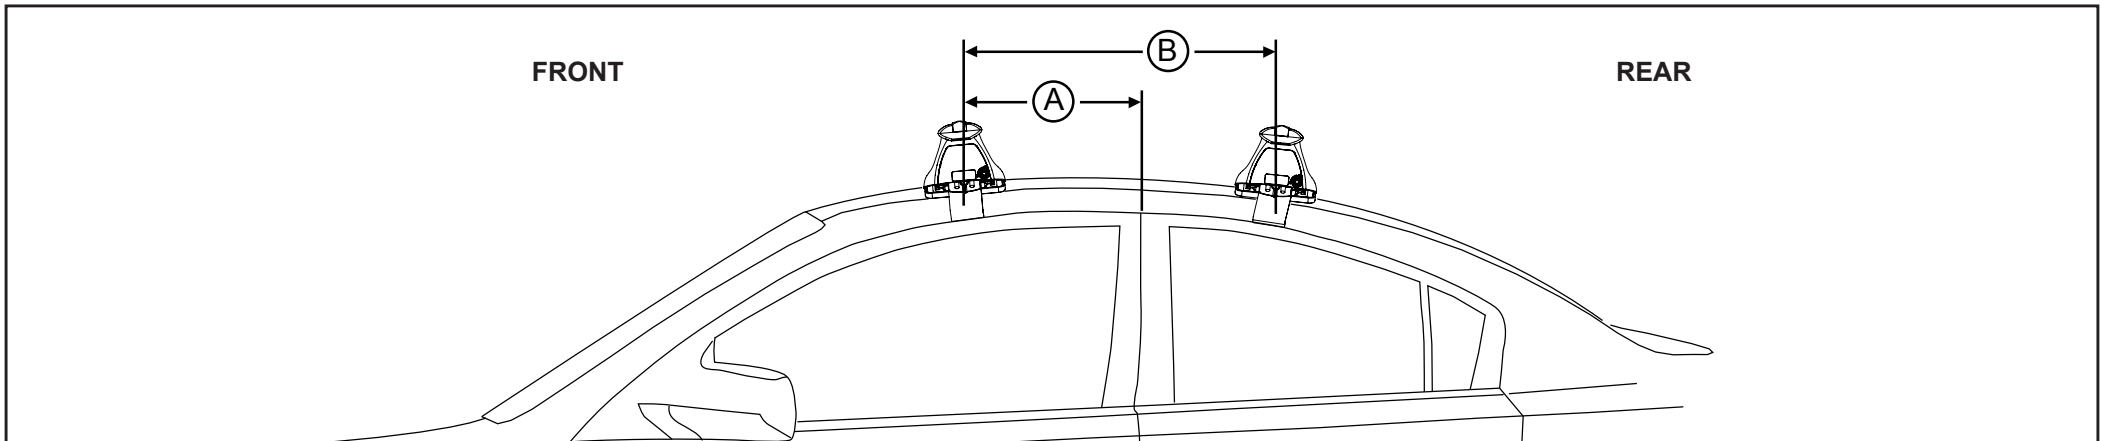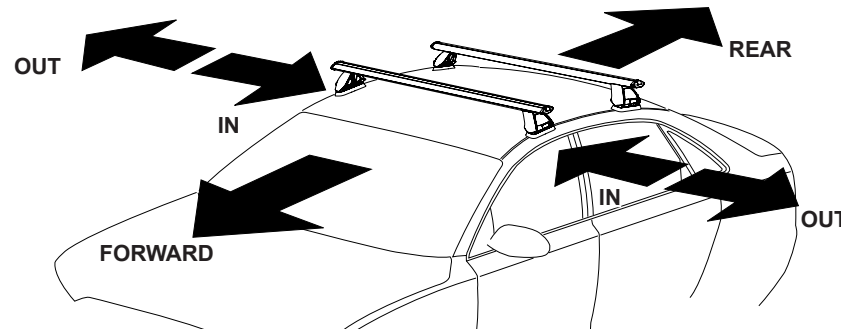

VEHICLE	Date	Measurement A	Measurement B	Load Rating up to (includes racks 5kg/ 11lbs)
ACURA TLX 4dr Sedan 1st Gen	15-	80mm / 3,5/32"	650mm / 25,19/32"	75kg / 165lbs