






CROSSBAR IDENTIFICATION



VA crossbar



EURO crossbar



HD crossbar

Vehicle	Date	Crossbar	FRONT CROSSBAR					REAR CROSSBAR						
			Front Right Pad/Clamp	Front Left Pad/Clamp	Measurement strip length per side	Measurement strip length per side	Measurement Distance (x)	Foot plate arrow direction	Rear Right Pad/Clamp	Rear Left Pad/Clamp	Measurement strip length per side	Measurement strip length per side	Measurement Distance (x)	Foot plate arrow direction
Audi A3/ S3 Sportback 5dr hatch	13-	1260mm	M366 SUB0658	M366 SUB0658	182mm	69mm	1012mm / 39,27/32"	OUT	M367 SUB0658	M367 SUB0658	154mm	41mm	956mm / 37,41/64"	OUT
Audi RS3 Sportback 5dr hatch	15-		Pad Arrow Forward						Pad Arrow Forward					



Rhino Rack 2500 Series - DK442 instruction

CONTROLLED


Measurement A: CENTRE of door jamb to CENTRE arrow of leg foot plate.

Measurement B: CENTRE of Front leg foot plate arrow to CENTRE of Rear leg foot plate arrow.

Carrying capacity: Roof rack is rated to 75kg. Please refer to manufacturers handbook for your vehicles maximum roof load capacity. Always use the lower of the two figures.


If your vehicle is not listed on this fitting instruction please refer to your countries Rhino-Rack web site for the latest information.

Direction of Pad Arrow and Foot Plate Arrow

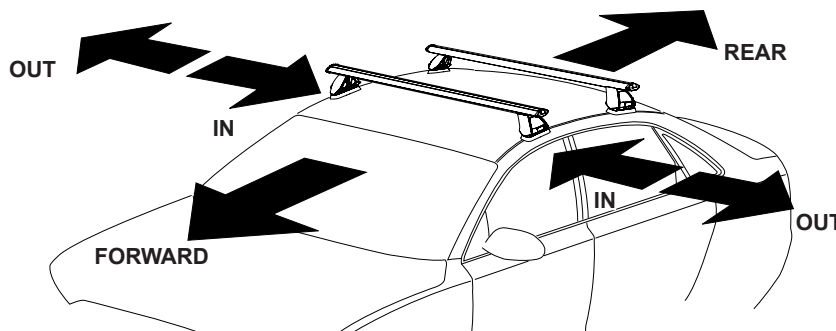

FRONT

REAR

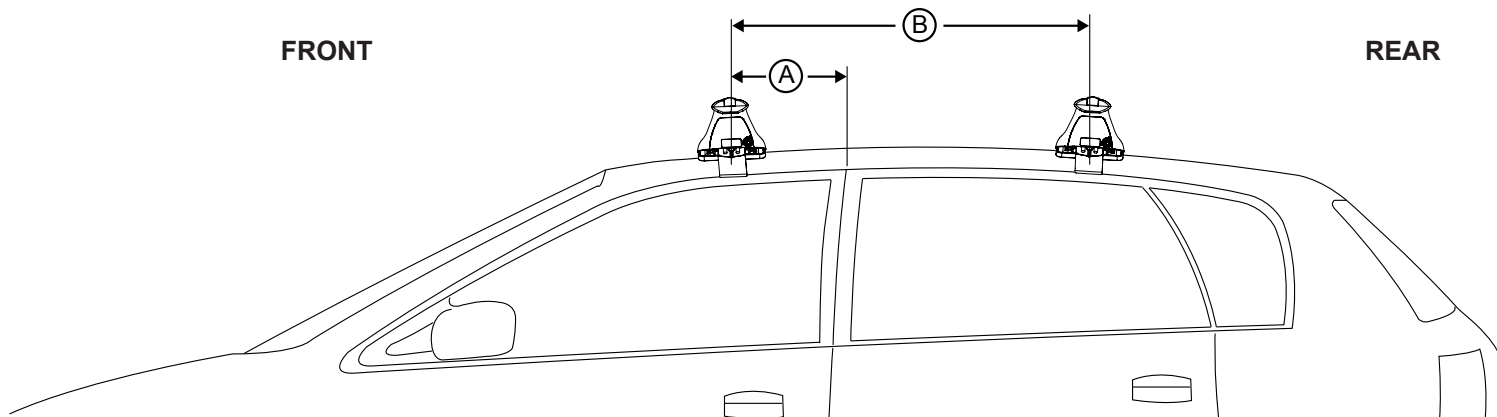

VEHICLE	Date	Measurement A	Measurement B	Load Rating (includes racks 5kg/ 11lbs)
Audi A3/ S3 Sportback 5dr hatch	13-	280mm / 11,1/32"	710mm / 27,61/64"	75kg / 165lbs
Audi RS3 Sportback 5dr hatch	15-			