






CROSSBAR IDENTIFICATION



VA crossbar



EURO crossbar



HD crossbar

Vehicle	Date	Crossbar	FRONT CROSSBAR					REAR CROSSBAR						
			Front Right Pad/Clamp	Front Left Pad/Clamp	Measurement strip length per side	Measurement strip length per side	Measurement Distance (x)	Foot plate arrow direction	Rear Right Pad/Clamp	Rear Left Pad/Clamp	Measurement strip length per side	Measurement strip length per side	Measurement Distance (x)	Foot plate arrow direction
Škoda Octavia 4dr sedan (incl. RS)	13-	1260mm	M415 SUB0651	M414 SUB0651	177mm	64mm	1002mm / 39,29/64"	OUT	M503 SUB0659	M504 SUB0659	175mm	62mm	998mm / 39,19/64"	OUT
			Pad Arrow OUT						Pad Arrow OUT					
Škoda Superb 5dr Hatch	16-	1260mm	M415 SUB0651	M414 SUB0651	194mm	81mm	1036mm / 40,25/32"	OUT	M503 SUB0659	M504 SUB0659	192mm	79mm	1032mm / 40,5/8"	OUT
			Pad Arrow OUT						Pad Arrow OUT					

Note:

Škoda Octavia using RS686 roof rack. Panoramic Glass Roof must not be operated with roof racks installed.

Škoda Superb using RS704 roof rack. Panoramic Glass Roof must not be operated with roof racks installed.



Rhino-Rack 2500 Series - DK450 instruction

CONTROLLED



Measurement A: CENTRE of door jamb to CENTRE arrow of leg foot plate.

Measurement B: CENTRE of Front leg foot plate arrow to CENTRE of Rear leg foot plate arrow.

Carrying capacity: Roof rack is rated up to 75kg. Please refer to manufacturers handbook for your vehicles maximum roof load capacity. Always use the lower of the two figures.

If your vehicle is not listed on this fitting instruction please refer to your countries Rhino-Rack web site for the latest information.

Direction of Pad Arrow and Foot Plate Arrow, Refer Page 1.

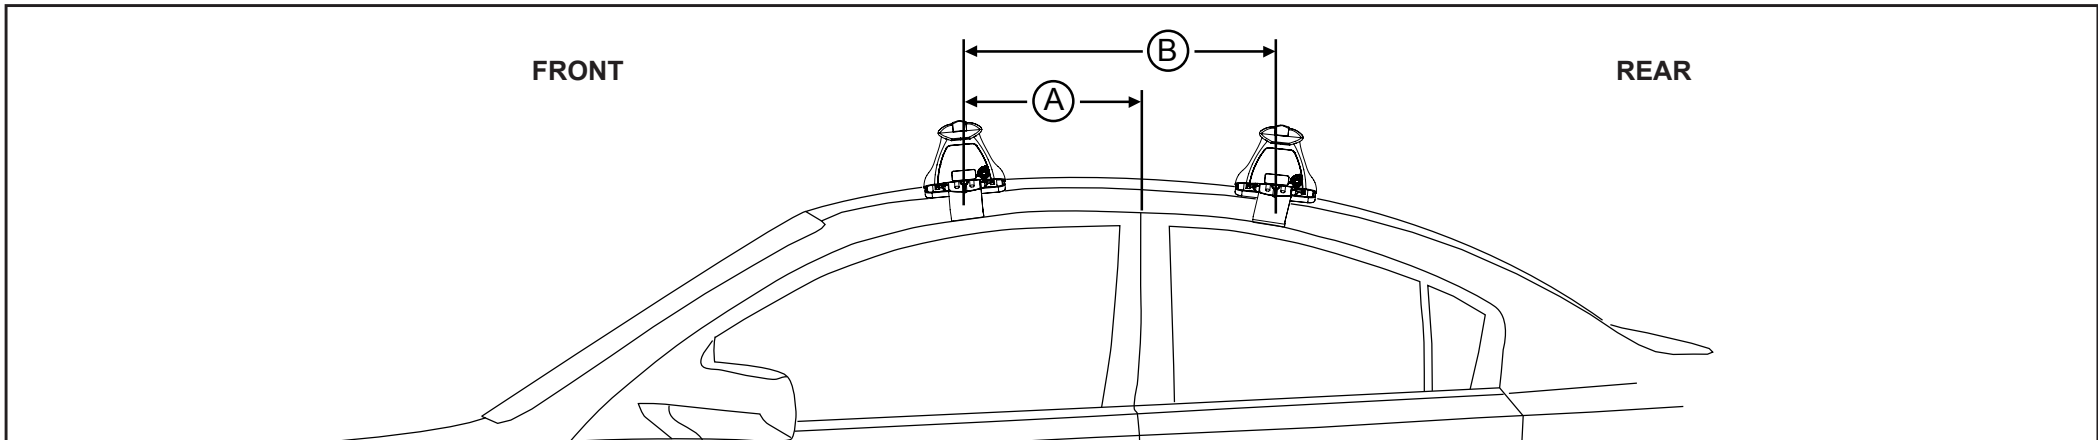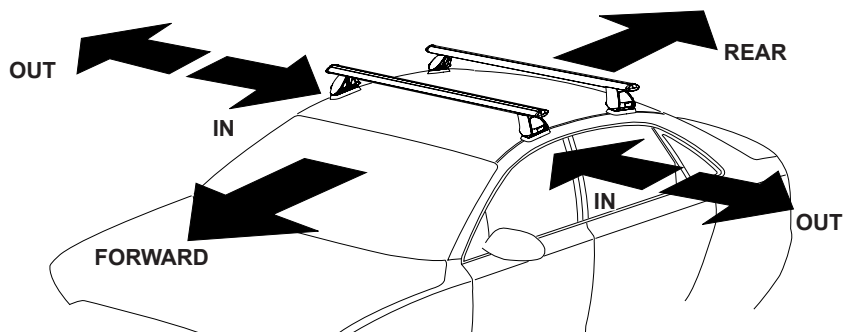

VEHICLE	Date	Measurement A	Measurement B	Load Rating up to (includes racks 5kg/ 11lbs)
Škoda Octavia 4dr sedan (incl. RS)	13-	285mm / 11,7/32"	750mm / 29,17/32"	75kg / 165lbs
Škoda Superb 5dr Hatch	16-	340mm / 13,3/8"	805mm / 31,11/16"	75kg / 165lbs