





Rhino-Rack 2500 Series - DK472 instruction

CONTROLLED


CROSSBAR IDENTIFICATION



VA crossbar















EURO crossbar




HD crossbar

Instruction for DK472 and RS721

FRONT CROSSBAR								REAR CROSSBAR					
													
Front Right Pad/Clamp	Front Left Pad/Clamp	Measurement strip length per side	Measurement strip length per side	Measurement Distance (x)	Foot plate arrow direction	Rear Right Pad/Clamp	Rear Left Pad/Clamp	Measurement strip length per side	Measurement strip length per side	Measurement Distance (x)	Foot plate arrow direction		
M366 SUB0685	M366 SUB0685	169mm	114mm	906mm / 35,43/64"	OUT	M366 SUB0685	M366 SUB0685	169mm	114mm	906mm / 35,43/64"	OUT		
Pad Arrow Forward						Pad Arrow Forward							

Note for RS721 Roof Rack. Panoramic Glass Roof MUST NOT be operated with this roof rack installed.

Direction of Pad Arrow and Foot Plate Arrow.

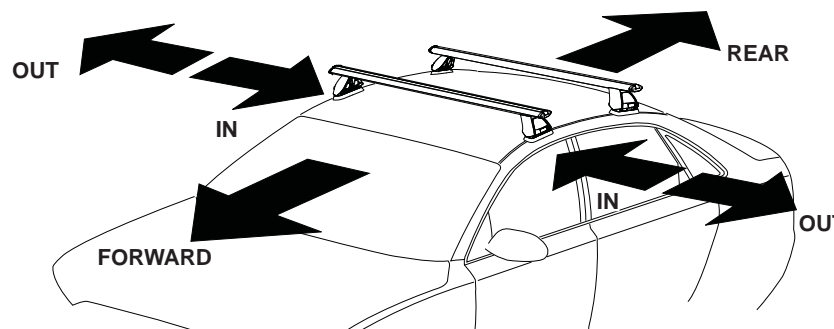



Rhino-Rack 2500 Series - DK472 instruction







CONTROLLED

Measurement A: CENTRE of door jamb to CENTRE arrow of leg foot plate.

Measurement B: CENTRE of Front leg foot plate arrow to CENTRE of Rear leg foot plate arrow.

Carrying capacity: Roof rack is rated up to 75kg. Please refer to manufacturers handbook for your vehicles maximum roof load capacity. Always use the lower of the two figures.

If your vehicle is not listed on this fitting instruction please refer to your countries Rhino-Rack Fit My Car web site for the latest information.

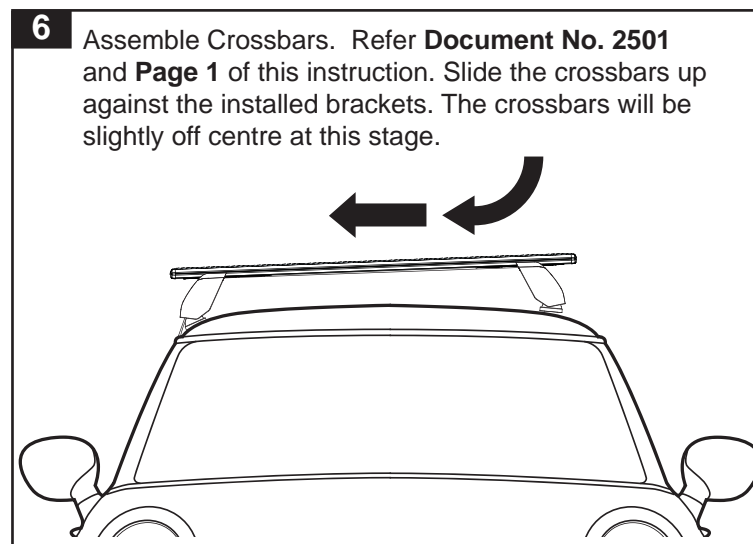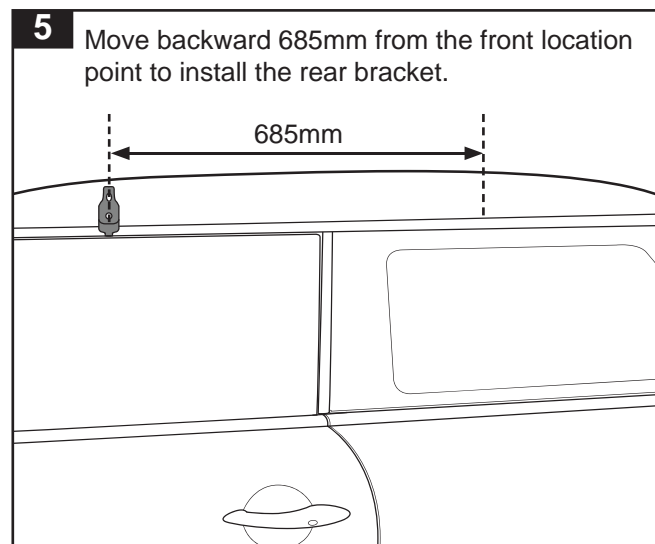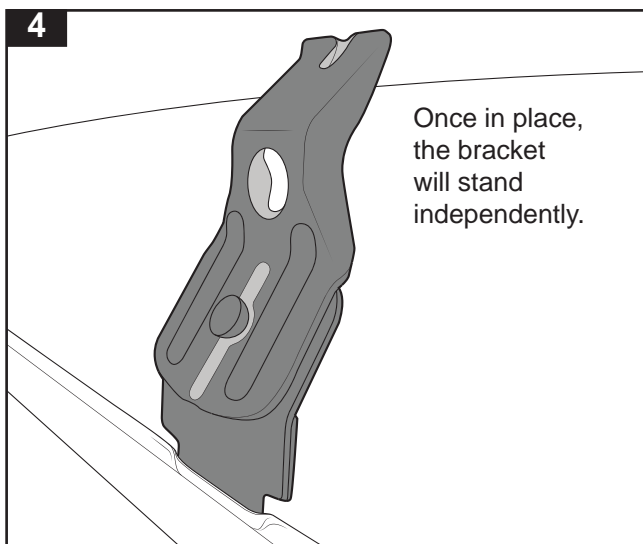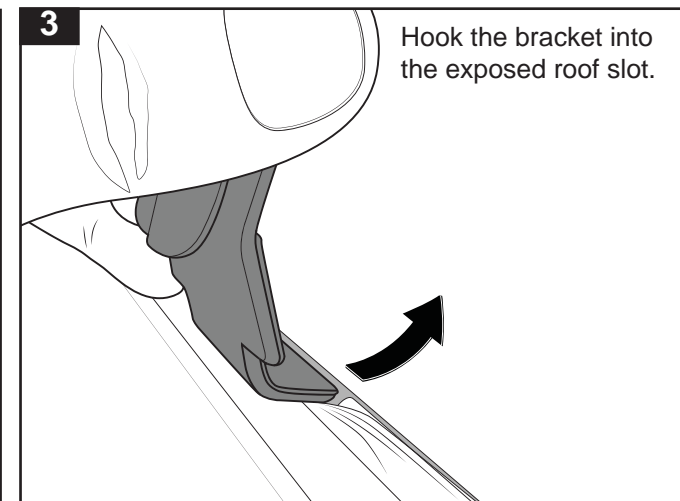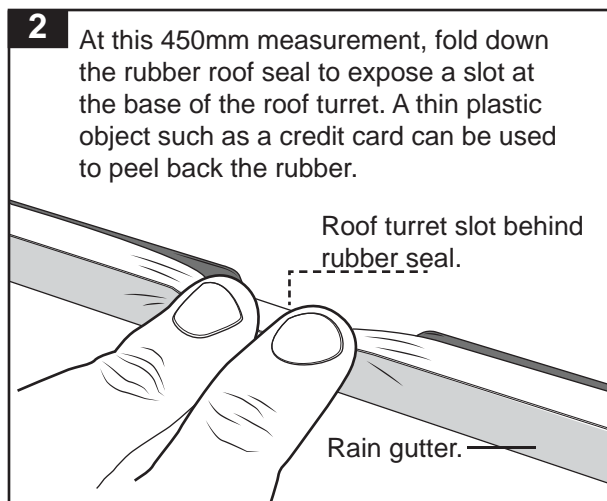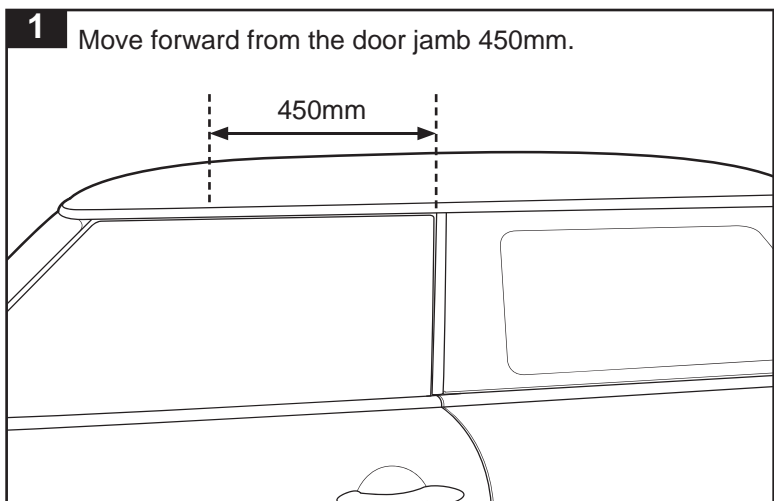





Rhino-Rack 2500 Series - DK472 instruction

CONTROLLED


- 7** Flex the bracket back into the leg assembly. Insert centre bolt and finger tighten.

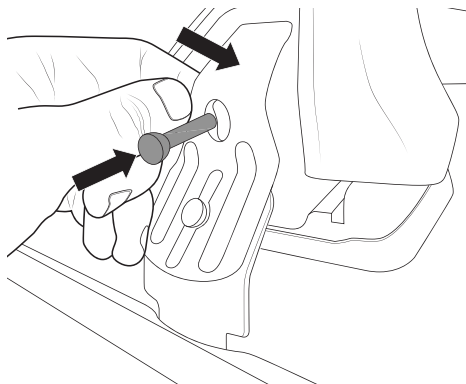


- 8** Repeat steps 2-4 for the opposite side of the vehicle.

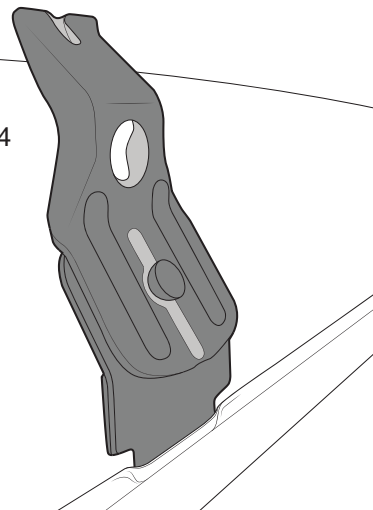



- 9** Place the Crossbars back to an even position and connect the two remaining brackets.

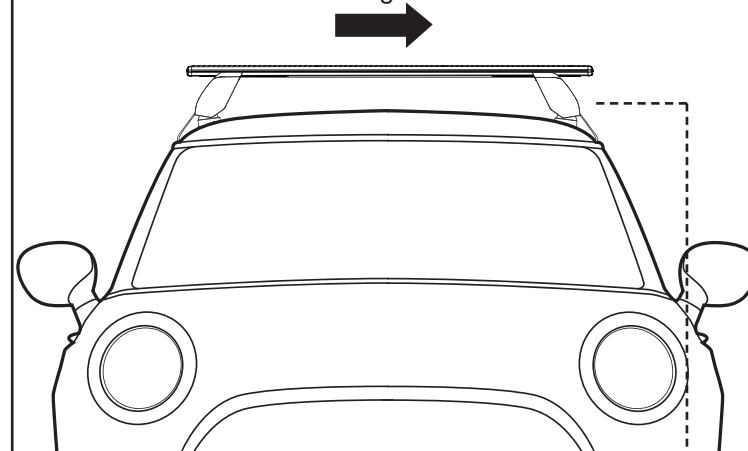

- 10** Be sure the Front and Rear Roof Rack is centred on the vehicle. Tighten the brackets evenly.

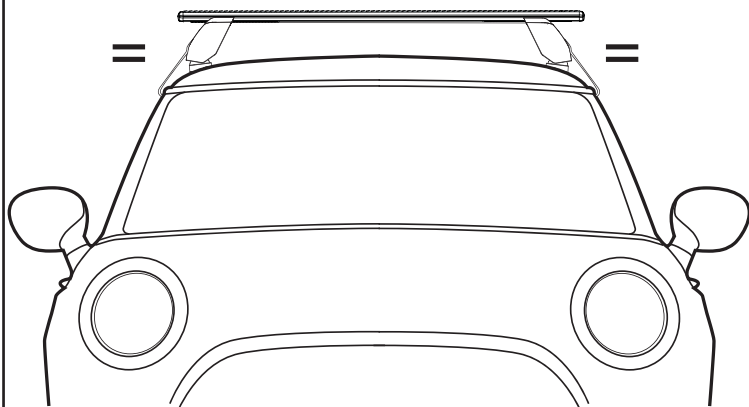

- 11** Check that the assembly is fixed tight by shaking crossbars horizontally and vertically.

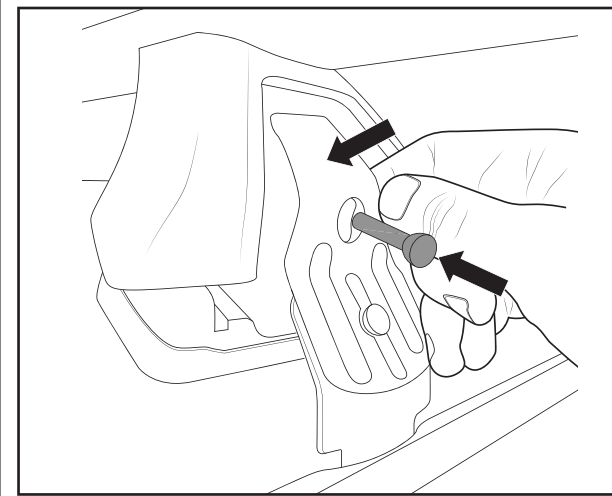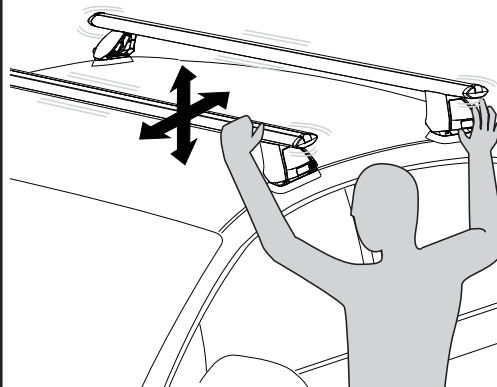

VEHICLE	Date	Measurement A	Measurement B	Load Rating up to (includes racks 5kg/ 11lbs)
MINI Cooper 3dr hatch R56 Incl. S, JCW	07-14	450mm / 17,23/32"	685mm / 26,31/32"	75kg / 165lbs