






CROSSBAR IDENTIFICATION



VA crossbar



EURO crossbar



HD crossbar

		FRONT CROSSBAR						REAR CROSSBAR						
				VA	EURO	HD	Foot plate arrow direction			VA	EURO	HD	Foot plate arrow direction	
Vehicle	Date	Crossbar	Front Right Pad/Clamp	Front Left Pad/Clamp	Measurement strip length per side	Measurement strip length per side	Measurement Distance (x)	Foot plate arrow direction	Rear Right Pad/Clamp	Rear Left Pad/Clamp	Measurement strip length per side	Measurement strip length per side	Measurement Distance (x)	Foot plate arrow direction
CHEVROLET Cruze Hatch	16-	1260mm	M416 SUB0550	M416 SUB0550	169mm	N/A	986mm / 38 13/16"	OUT	M416 SUB0186	M416 SUB0186	151mm	N/A	950mm / 37 3/8"	OUT
			Pad Arrow OUT						Pad Arrow OUT					



Rhino Rack 2500 Series - DK489 instruction

CONTROLLED



Measurement A: CENTRE of door jamb to CENTRE arrow of leg foot plate.

Measurement B: CENTRE of Front leg foot plate arrow to CENTRE of Rear leg foot plate arrow.

Carrying capacity: Roof rack is rated up to 75kg. Please refer to manufacturers handbook for your vehicles maximum roof load capacity. Always use the lower of the two figures.

If your vehicle is not listed on this fitting instruction please refer to your countries Rhino-Rack web site for the latest information.

Direction of Pad Arrow and Foot Plate Arrow

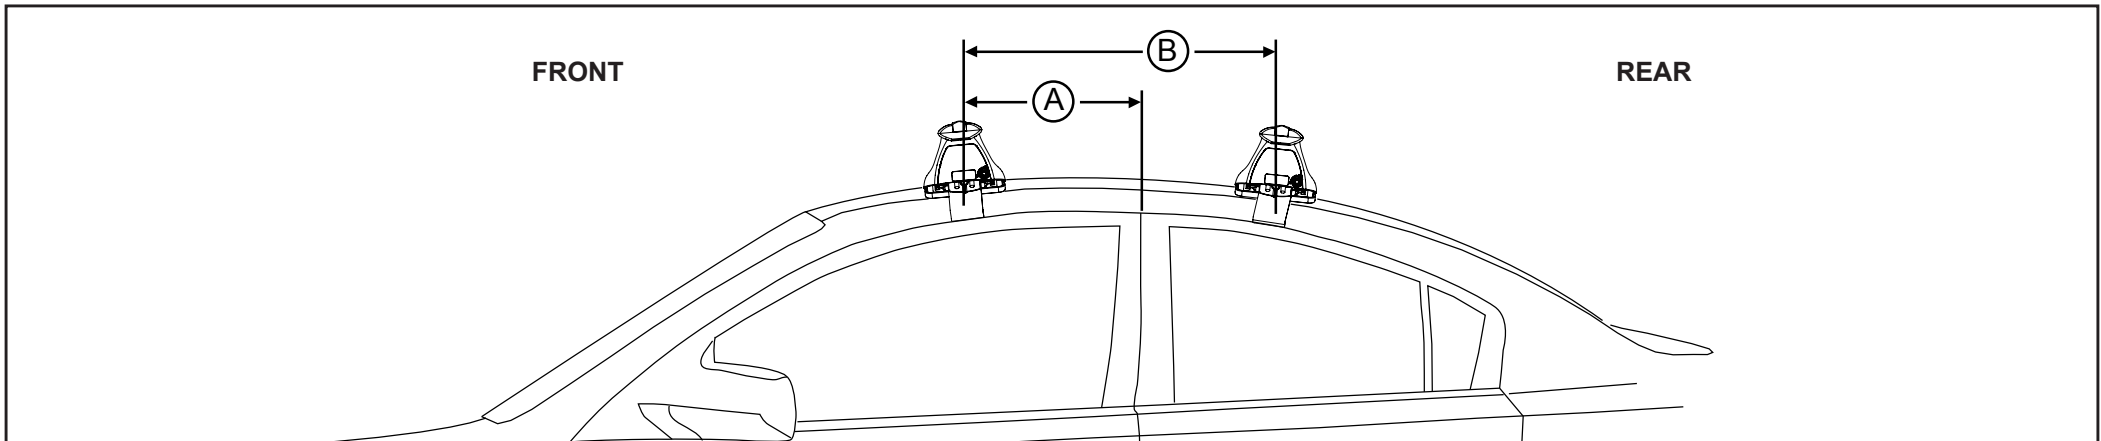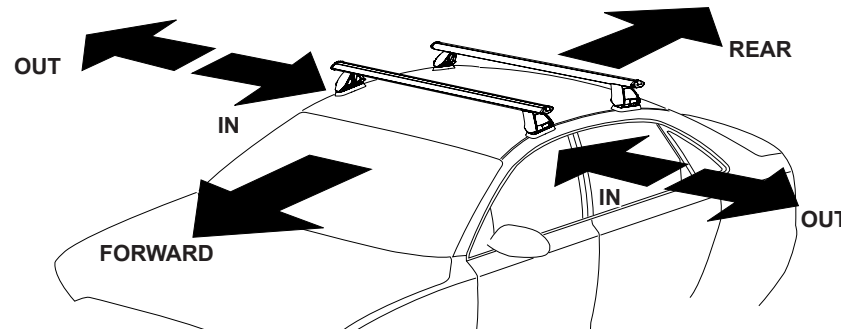

VEHICLE	Date	Measurement A	Measurement B	Load Rating up to (includes racks 5kg/ 11lbs)
CHEVROLET Cruze Hatch	16 -	150mm / 5 15/16"	650mm / 25 9/16"	75kg / 165lbs