

Reconn Platform


Toyota Tacoma Gen 2&3

63100

Important:

- 1. Check the Rhino-Rack website to ensure you have the latest issue of these instructions.
- 2. Please refer to your fitting instruction to ensure that the accessory is installed correctly.
- 3. Check the contents of kit before commencing fitment and report any discrepancies.
- 4. Place these instructions in the vehicle's glove box after installation is complete.
- 5. These instructions must be followed for warranty to be upheld.


Fit Time: 90 mins

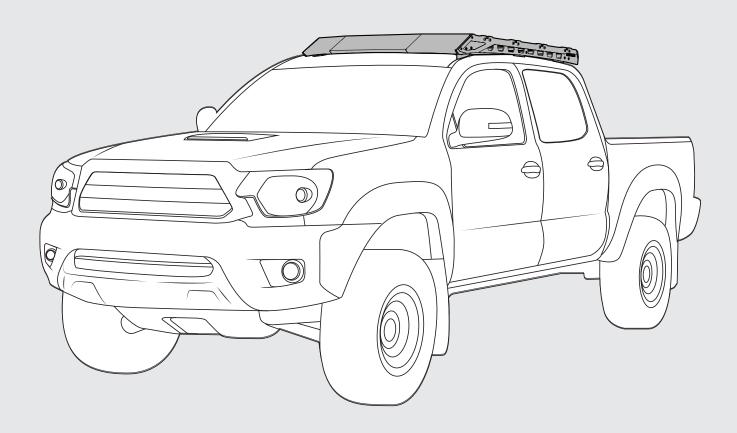


RHINORACK.COM

Document No: 520-RFI-00199 Issue No: 02 Issue Date: 10/04/2025

Toyota Tacoma Gen 2&3

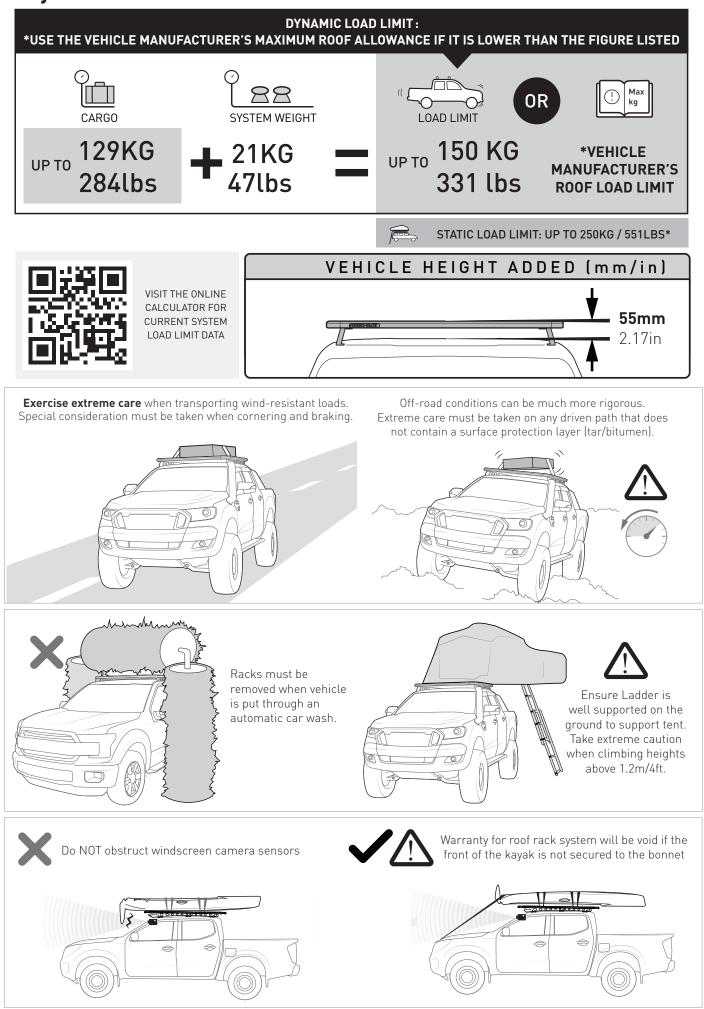

63100 // MAKE SPACE FOR ADVENTURE

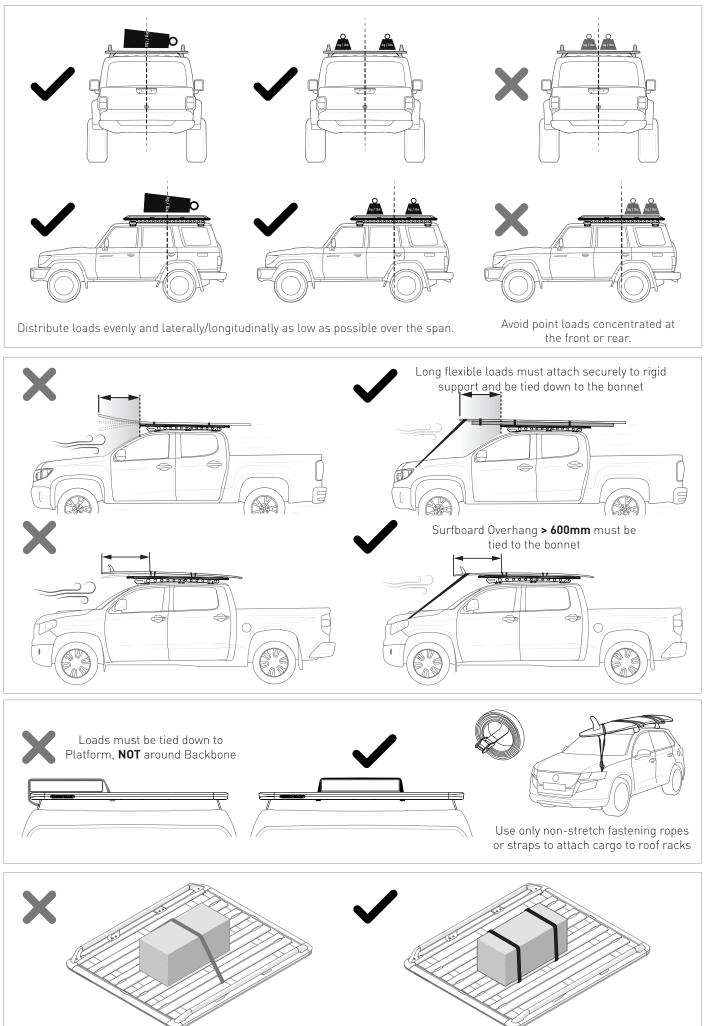



In service maintenance checks

- All bolts should be checked after driving a short distance when you first install your roof racks to ensure none have loosened.
- All bolted connections should be checked again at regular intervals (weekly is recommended, depending on road conditions, usage, loads and distances travelled).
- All bolted connections should be checked each time they are re-fitted.
- Off-road conditions are more rigorous. Check all bolted connections and your load more regularly.
- Ensure that your total vehicle manufacturer's GVM (gross vehicle mass) and gross axle weights are not exceeded (refer to vehicle owner's manual).


Note for Dealers and Fitters

It is your responsibility to ensure these fitting instructions are given to the end user or client. These instructions remain the property of Rhino-Rack Australia Pty. Ltd. and may not be changed or used for any other purpose than intended.

Torque Settings

Throughout this instruction manual, an impact driver can be used to speed up installation. However, it is important to ensure that the final turns are completed with a torque wrench to achieve the required torque rating.

Take caution when using an impact driver, as excessive torque can result in stripped threads.

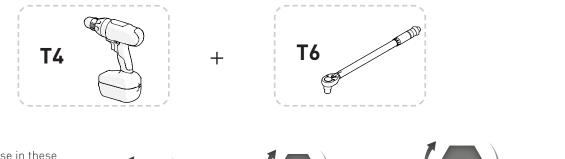

Torque Settings:

Unless stated otherwise in these instructions, all fasteners should be set to the following torque settings:









What you should have


To complete this build/ fit you will need.

RECONN SYSTEM COMPONENTS

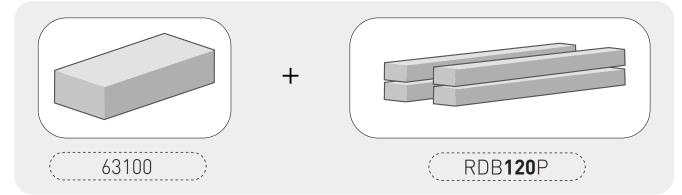


Parts List

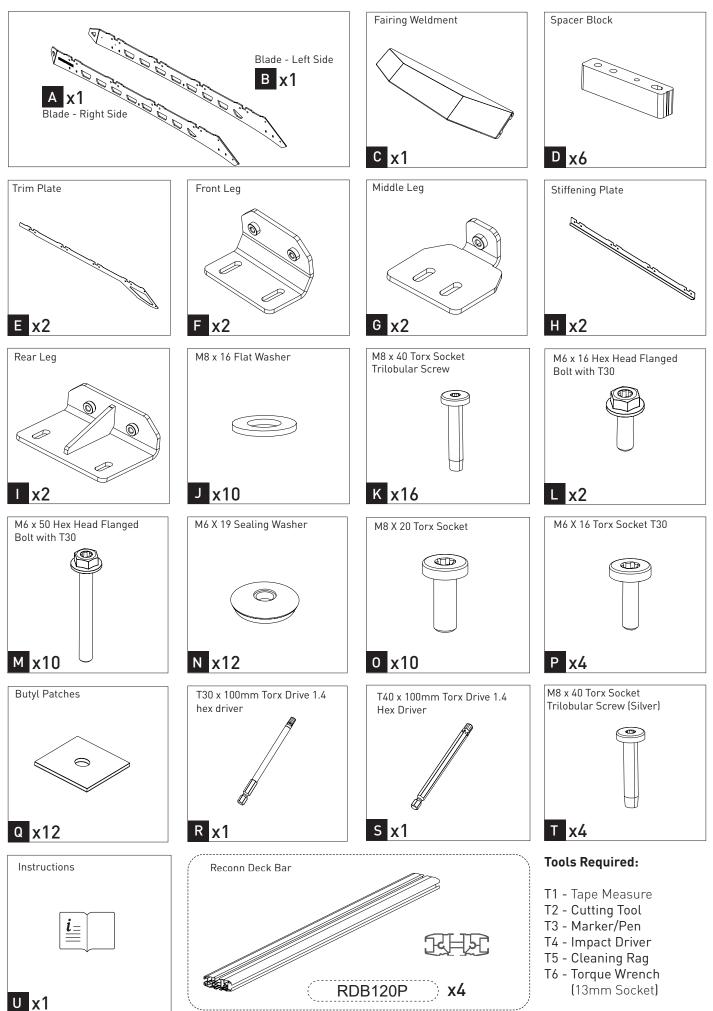

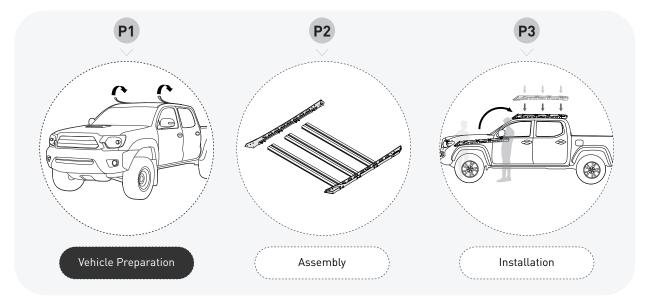



Measure and mark the ditch trim from the front (**measurements stated in the table**)

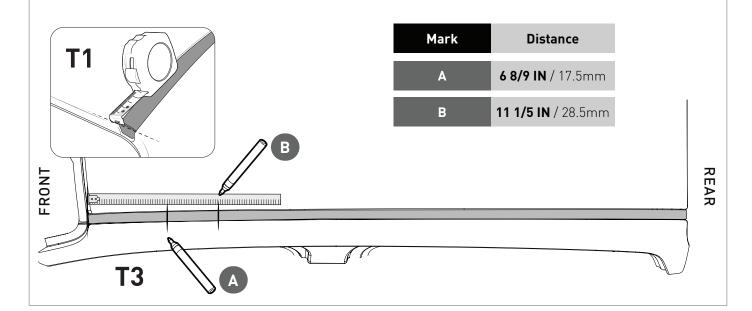



2 Measure and mark the ditch trim from the Rear (**measurements stated in the table**).

		Mark	Distance		Tooling Mark	
		С	3 1/4 IN / 8.2mm			
		D	7 1/4 IN / 18.5mm	معلمين	uluulu	
		E	21 3/4 IN / 55.2mm			
Ę		F	25 3/4 IN / 65.5mm	E // T3	C	
FRONT						
E						
l				F V		

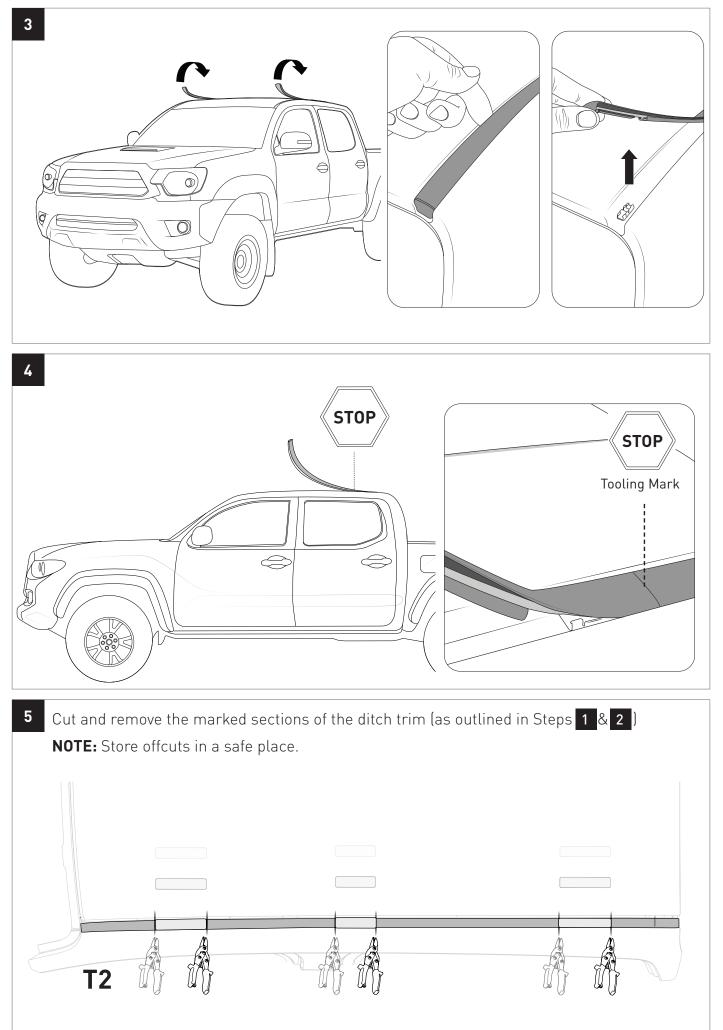


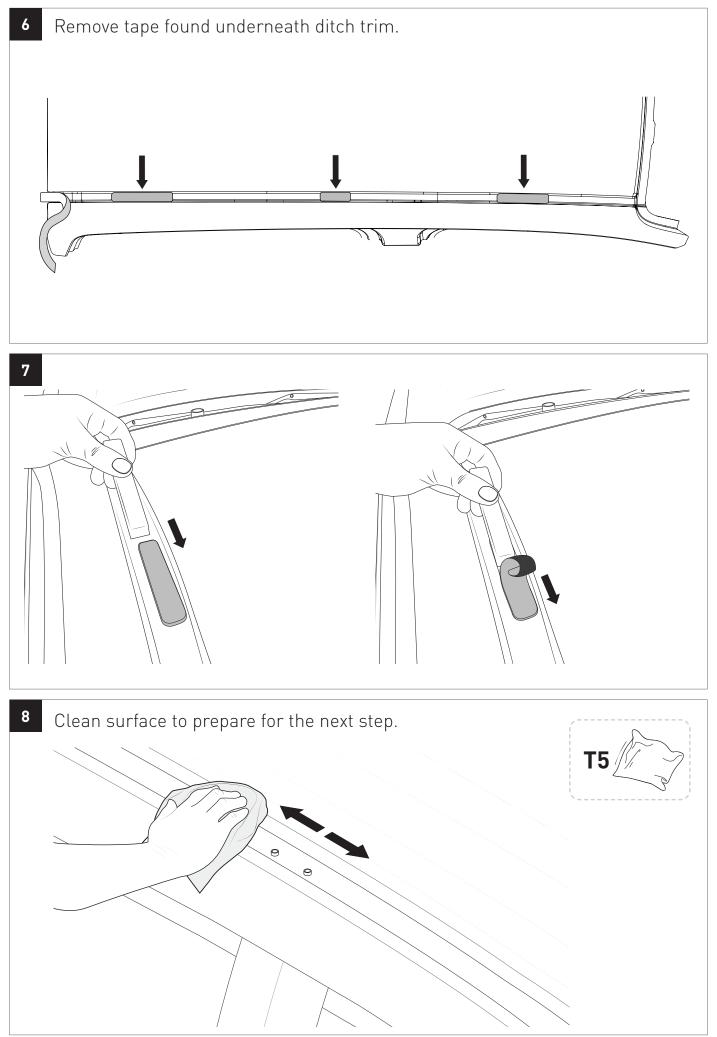

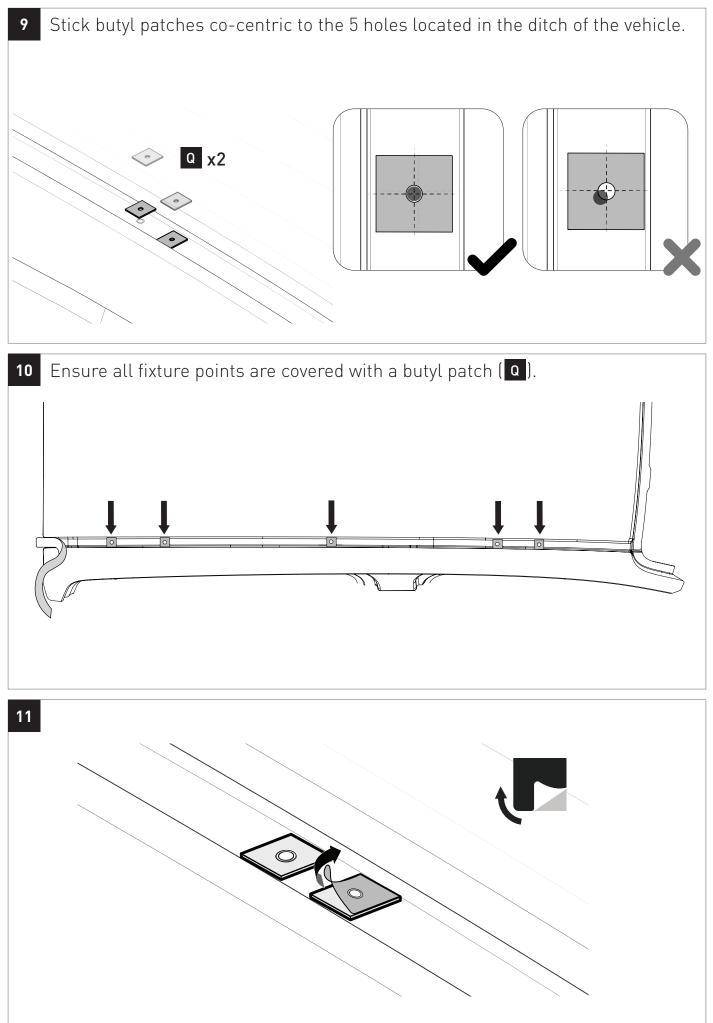


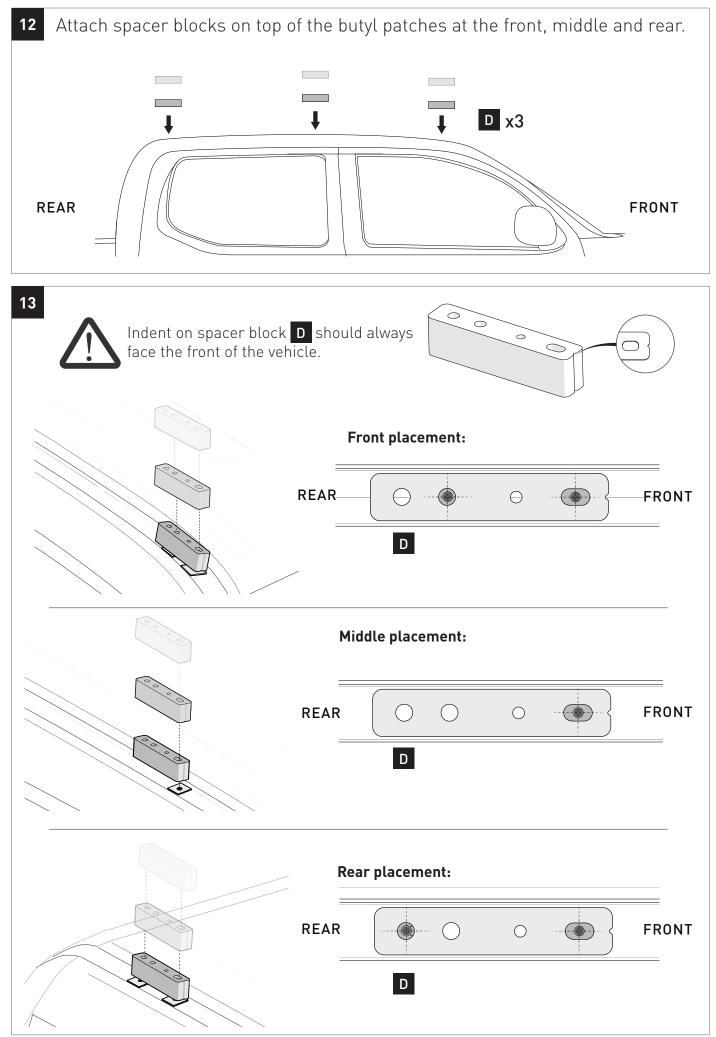



Page 10 of 23

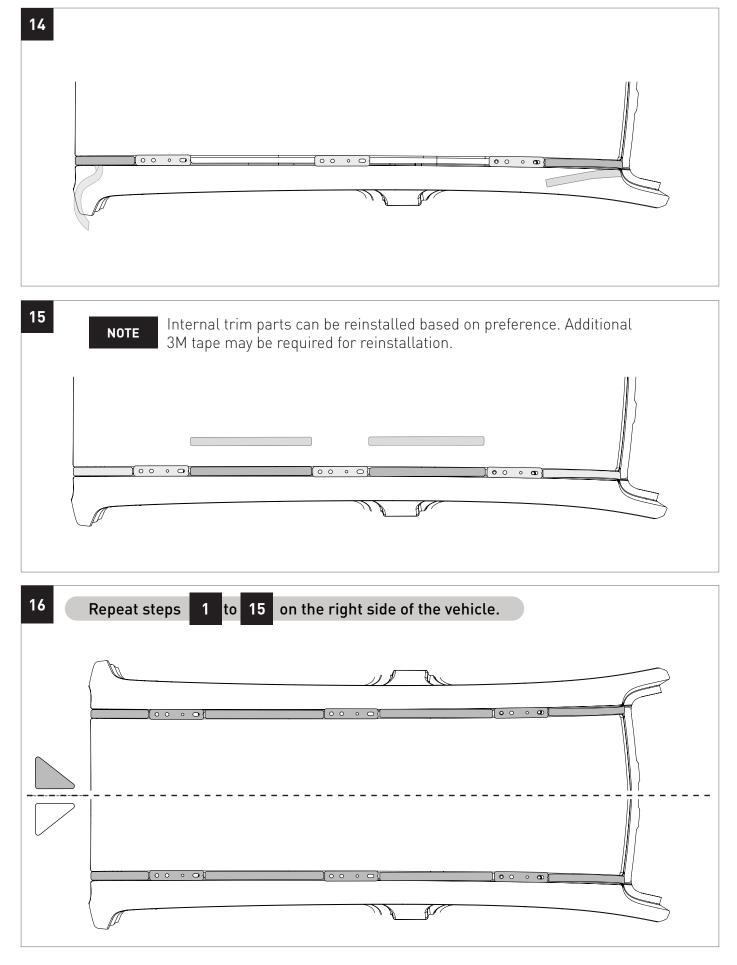


🕬 Vehicle Preparation Complete. 🕬

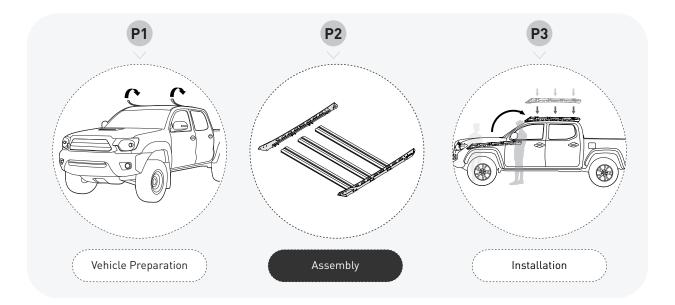


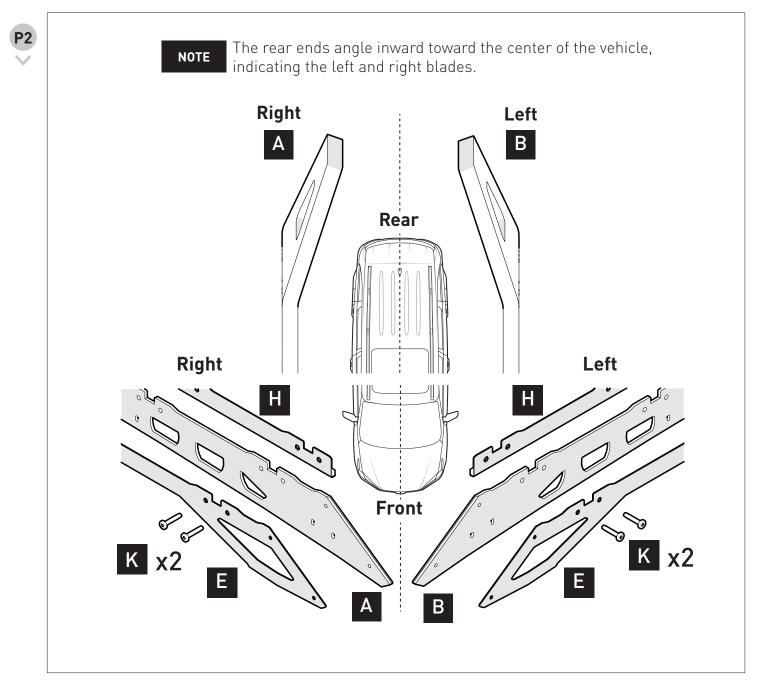

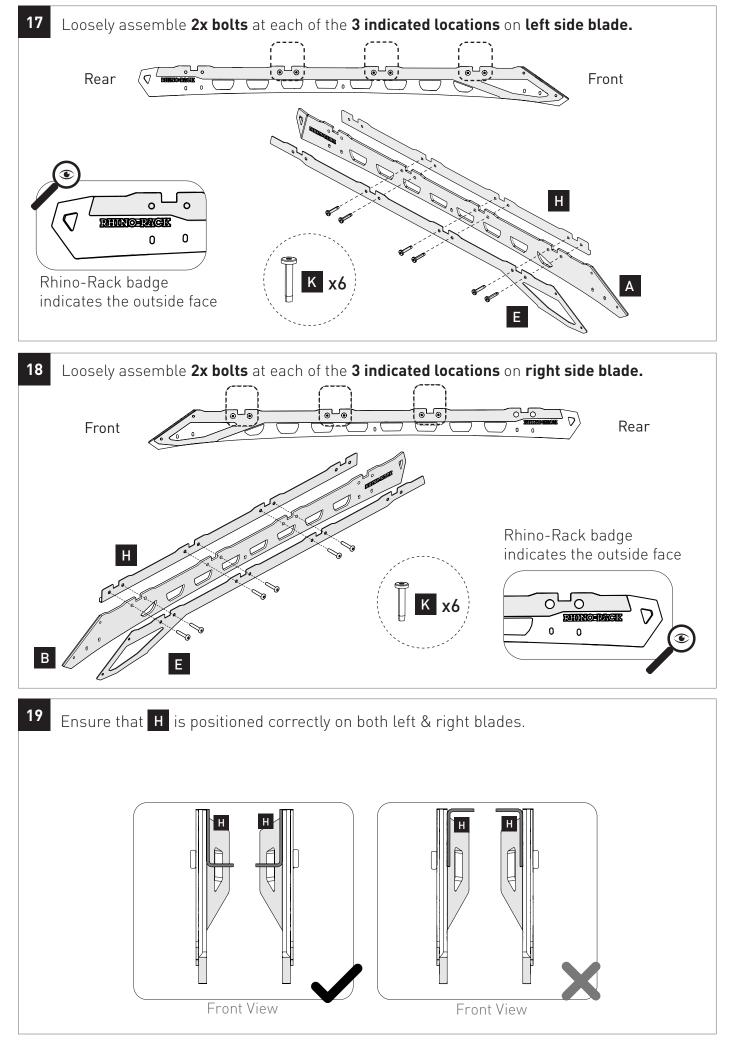



63100 // MAKE SPACE FOR ADVENTURE

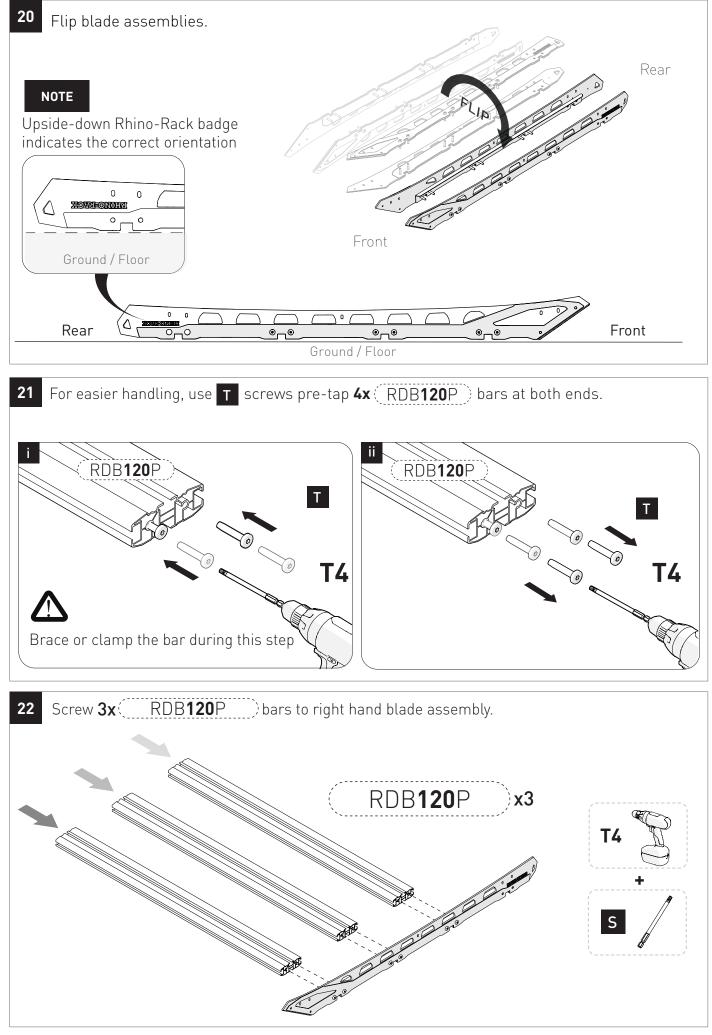


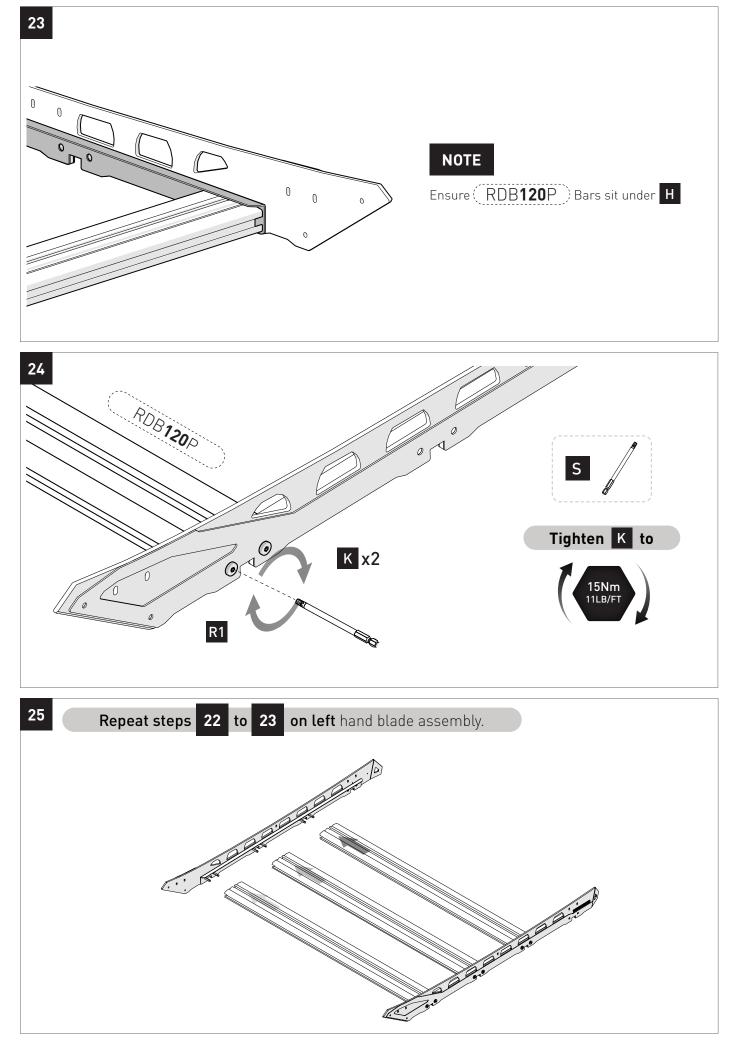


63100 // MAKE SPACE FOR ADVENTURE

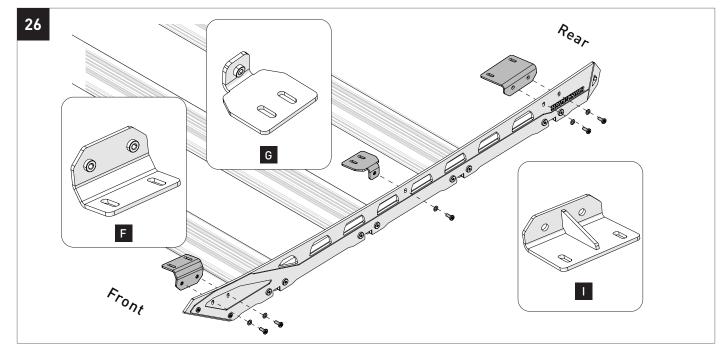


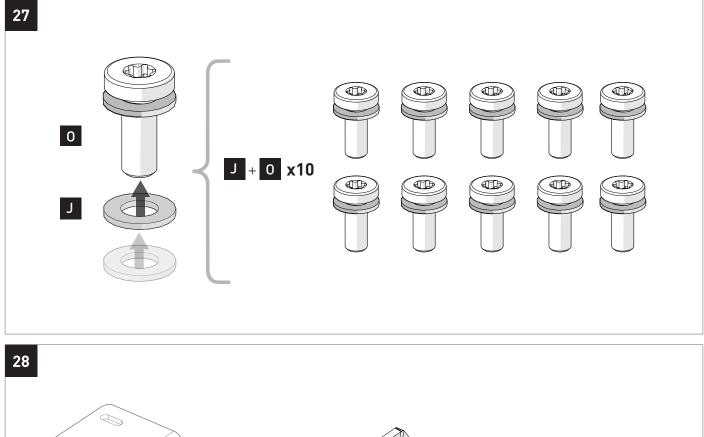


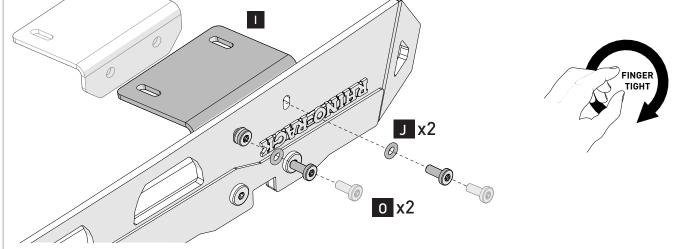

Page 16 of 23

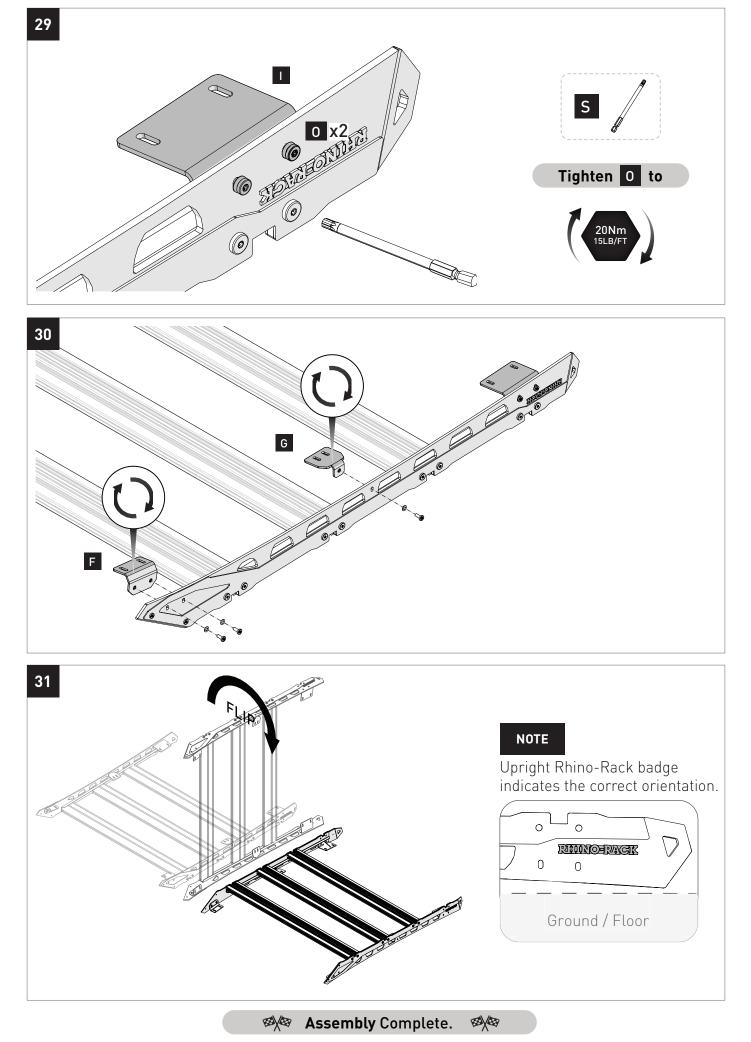

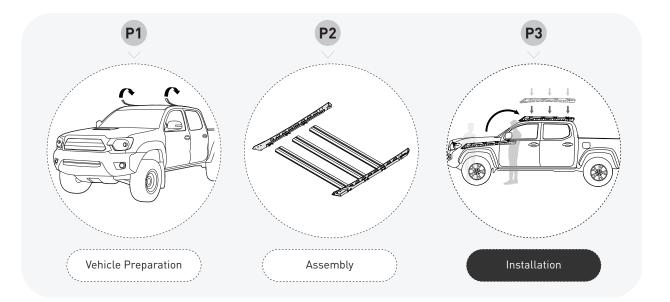

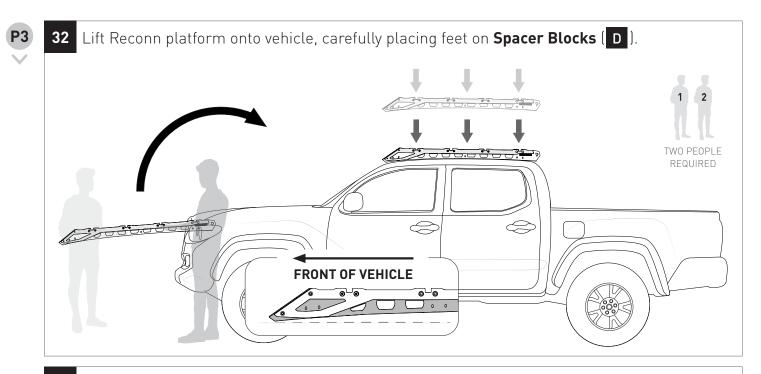



33

NOTE


Take Caution when lowering onto spacer blocks to aviod dislodging or shifting out of position.


Page 18 of 23

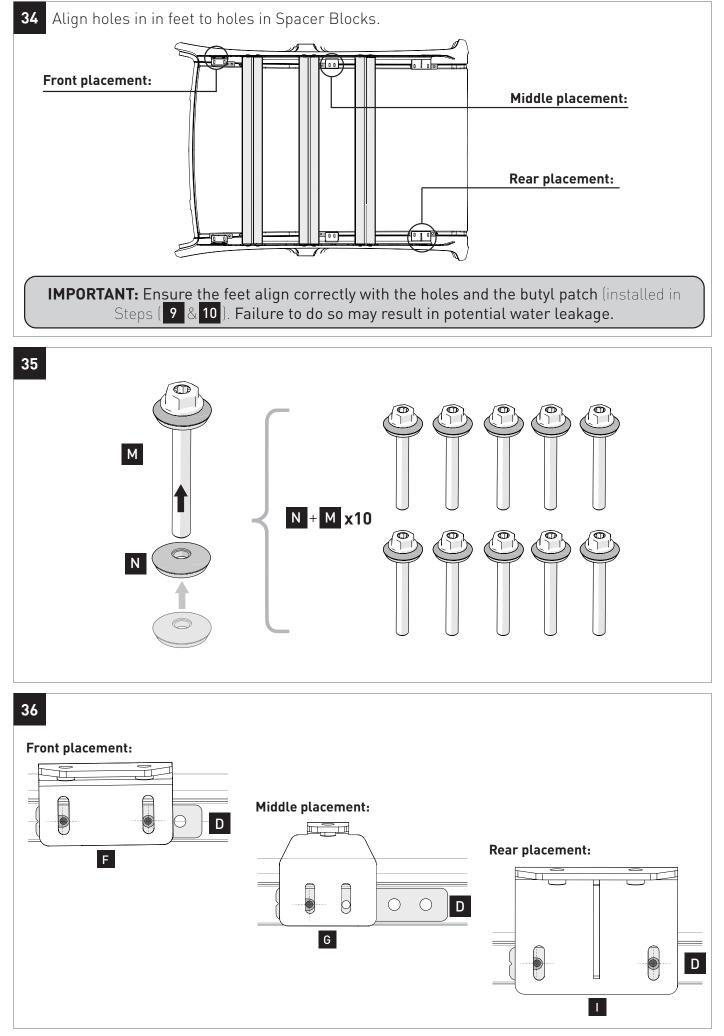

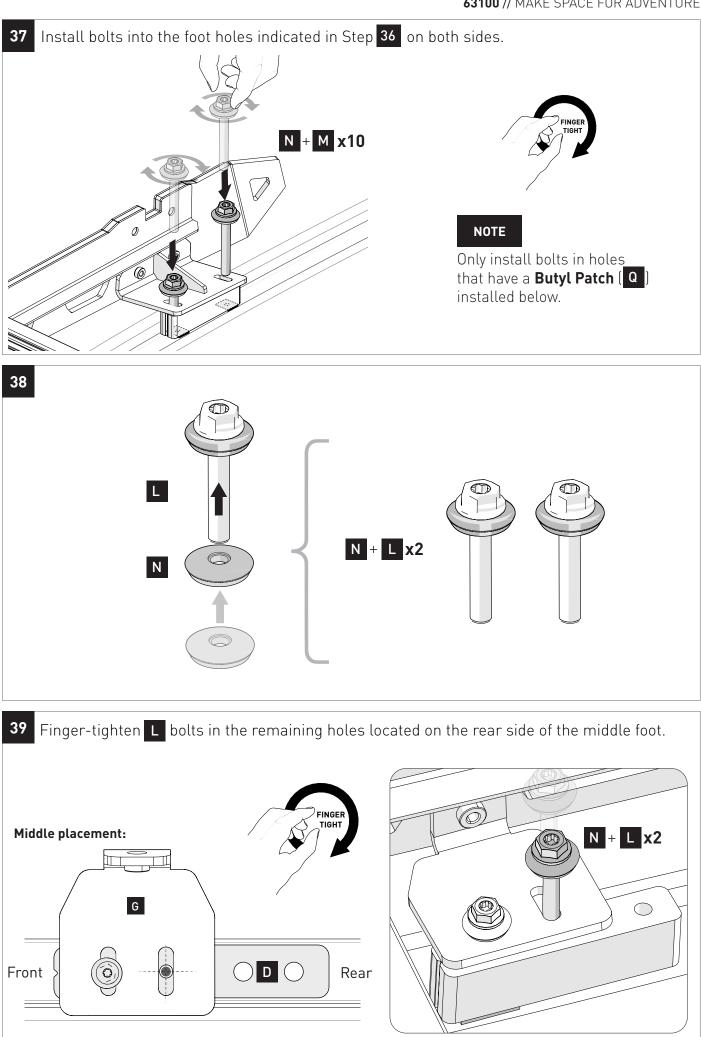


Page 20 of 23

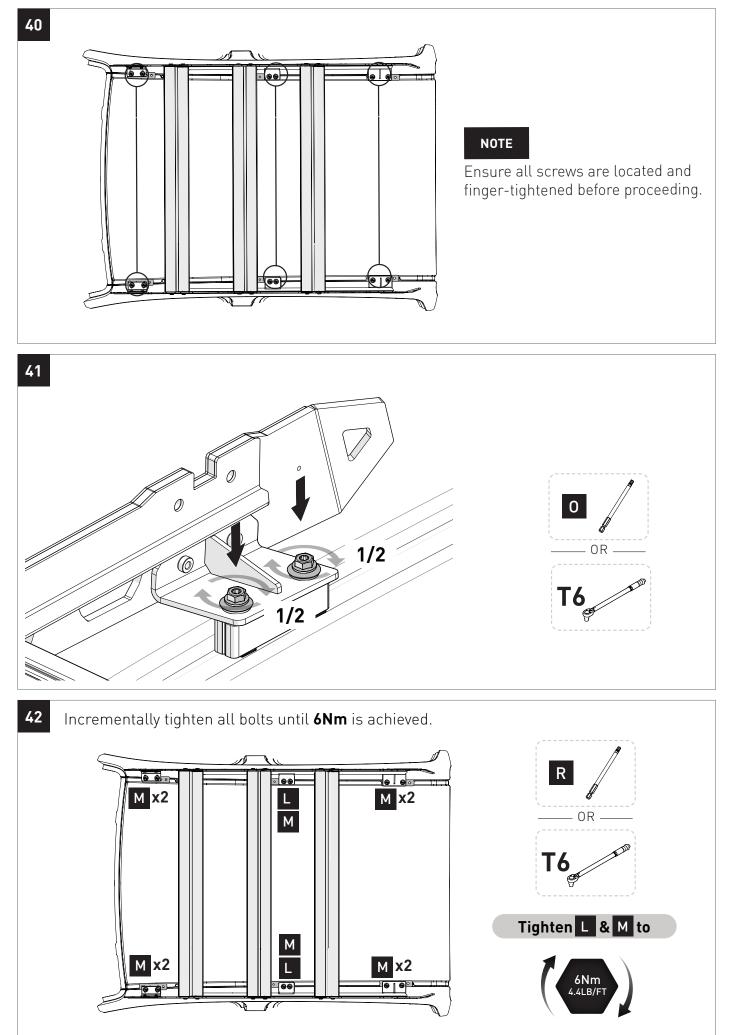

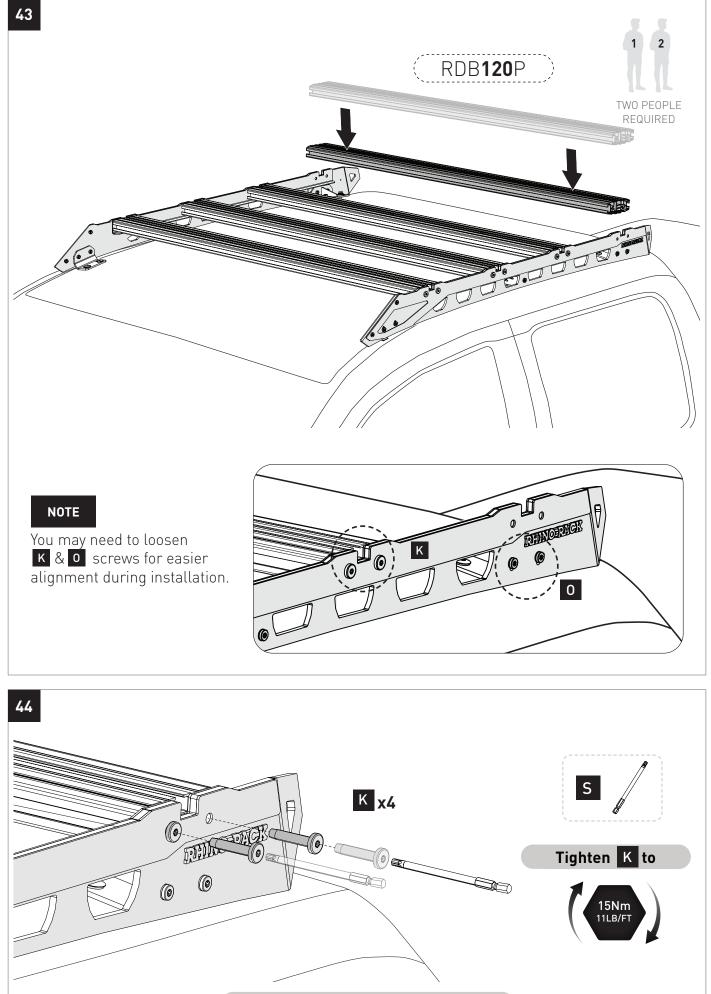

Repeat step on right side

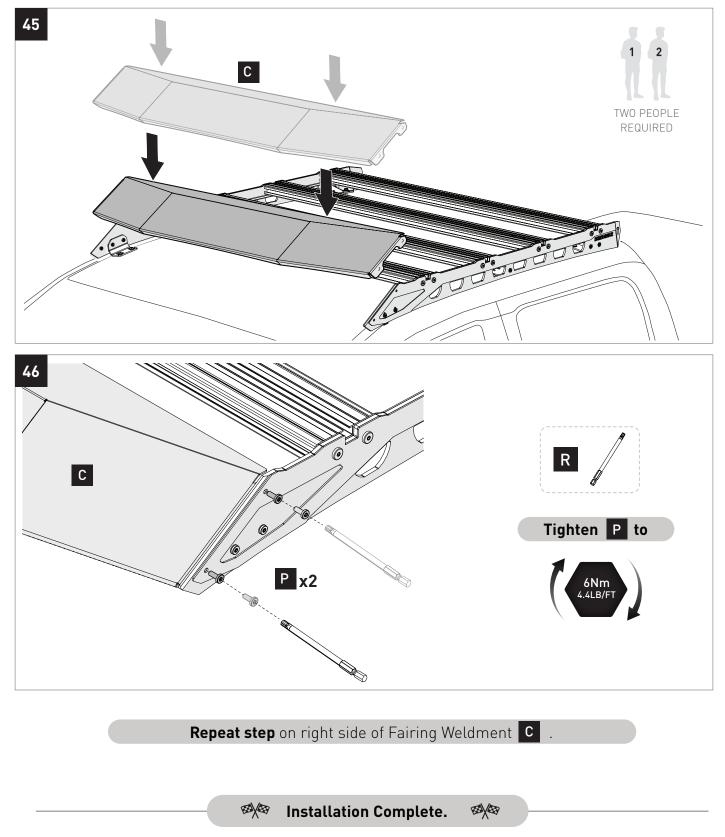



RHINORACK.COM

Rhino-Rack AUSTRALIA 22A Hanson Pl, Eastern Creek, NSW, 2766

Rhino-Rack USA Unit D, 2450 Airport Blvd, Aurora, CO, 80011