





DK213 Rhino-Rack VA, Aero, Euro & HD crossbar instruction


IDENTIFICATION CHART

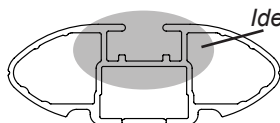


VA crossbar

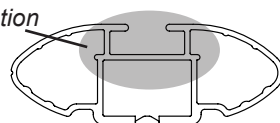

AERO crossbar







EURO crossbar







HD crossbar

FRONT CROSSBAR



REAR CROSSBAR



Vehicle	Date	Crossbar	Front Right Pad/Clamp	Front Left Pad/Clamp	Measurement strip length per side	Measurement strip length per side	Measurement Distance (x)	Foot plate arrow direction	Rear Right Pad/Clamp	Rear Left Pad/Clamp	Measurement strip length per side	Measurement strip length per side	Measurement Distance (x)	Foot plate arrow direction
Mercedes C-Class (W204) 4dr sedan	2007 on	1180mm	M506 SUB0256	M505 SUB0256	176mm	121mm	920mm / 36,7/32"	OUT	M505 SUB0257	M506 SUB0257	163mm	108mm	894mm / 35,13/64"	OUT
			Arrow OUT						Arrow OUT					



DK213 Rhino-Rack VA, Aero, Euro & HD crossbar instruction




Measurement A: CENTRE of door jamb to CENTRE arrow of leg foot plate.

Measurement B: CENTRE of Front leg foot plate arrow to CENTRE of Rear leg foot plate arrow.



Carrying capacity: Roof rack is rated to 75kg. Please refer to manufacturers handbook for your vehicles maximum roof load capacity. Always use the lower of the two figures.

If your vehicle is not listed on this fitting instruction please refer to your countries Rhino-Rack web site for the latest information.

Pad M505, FRONT Left of vehicle - Arrow facing outward.
Pad M506, FRONT Right of vehicle - Arrow facing outward.
Pad M505, REAR Right of vehicle - Arrow facing outward.
Pad M506, REAR Left of vehicle - Arrow facing outward.

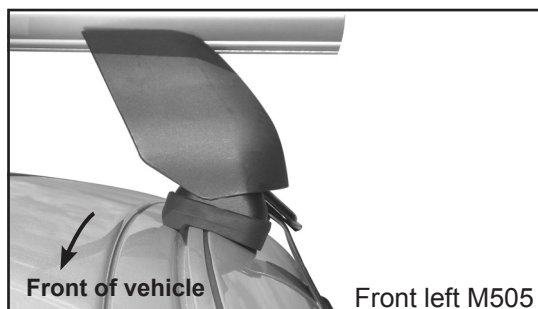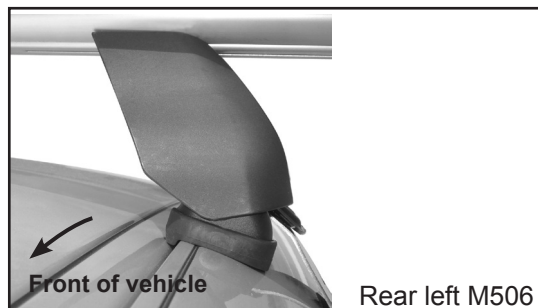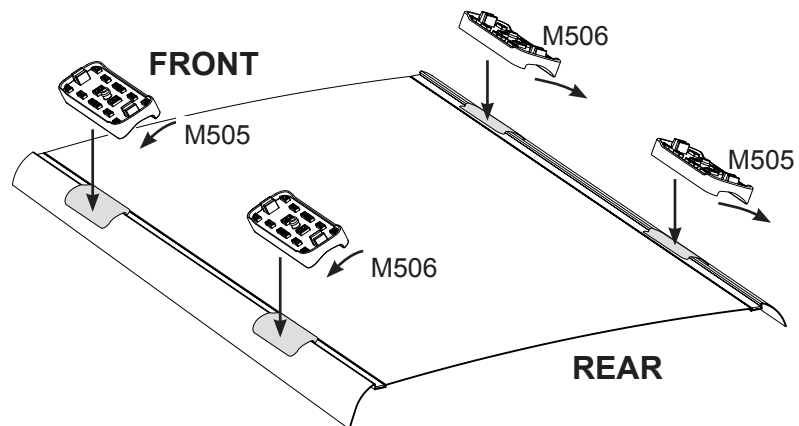

Direction of Pad, Arrow and Foot Plates

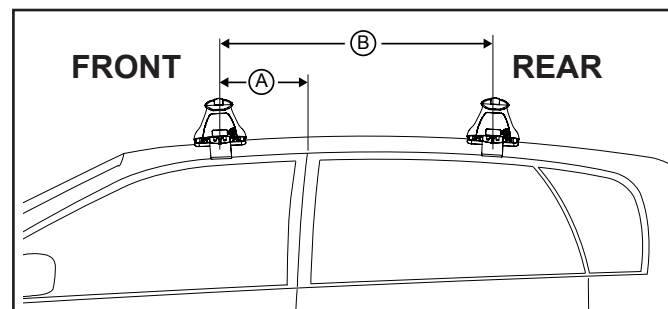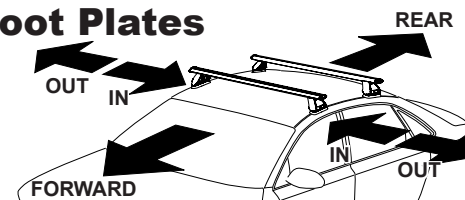

VEHICLE	Date	Measurement A	Measurement B	Load Rating (includes racks 5kg/11lbs)
Mercedes C-Class (W204) 4dr sedan	2007 on	235mm / 9,1/4"	660mm / 25,63/64"	60kg / 132lbs