




RHINO-RACK®

BASE KIT RCP95-BK

Important:

1. Check the Rhino-Rack website to ensure you have the latest issue of these instructions.
2. Please refer to your fitting instruction to ensure that the roof racks are installed in the correct locations.
3. Check the contents of kit before commencing fitment and report any discrepancies.
4. Place these instructions in the vehicle's glove box after installation is complete.
5. These instructions must be followed for warranty to be upheld.

Fit Time: 30mins

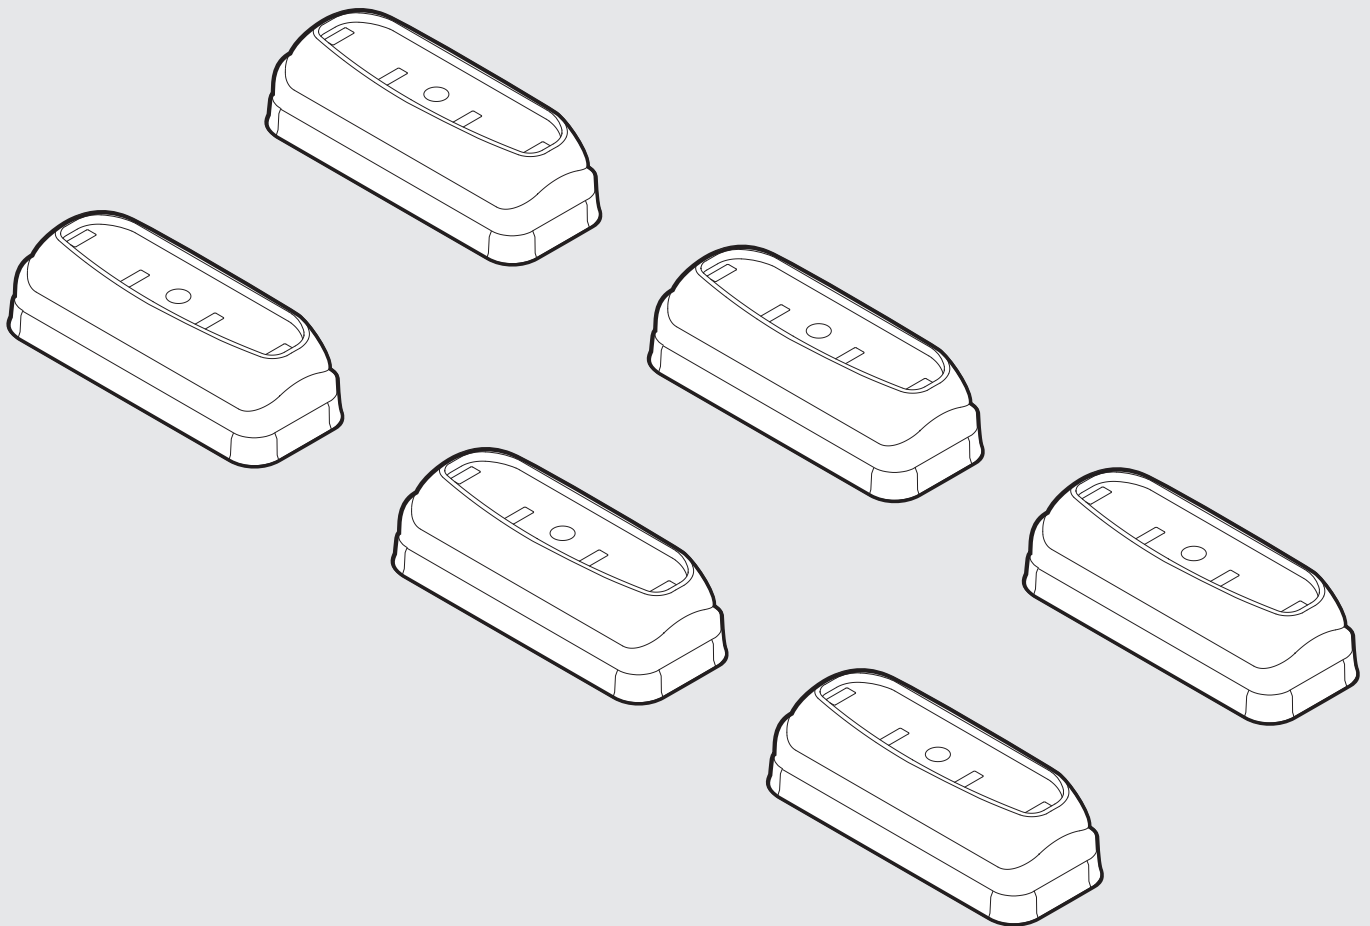

Rhino-Rack AUSTRALIA
22A Hanson Pl,
Eastern Creek, NSW, 2766
(02) 8846 1900
rhinorack.com.au

Rhino-Rack USA
Unit D, 2450 Airport Blvd,
Aurora, CO, 80011
877-744-6622
rhinorack.com

Doc. No: 520-RFI-00230
Issue No: 01
Issue Date: 20/05/2025

RCP95-BK Instructions


Carrying Capacity

Check your vehicle owners hand book for vehicle maximum carrying capacity. Please ensure you use the vehicle manufacturer's maximum roof allowance if it is lower than the figure listed in this instruction.





Load must be evenly distributed over the system.


For your vehicle specific fitment rating, refer to the Rhino Rack online load rating calculator.

VISIT THE ONLINE CALCULATOR FOR CURRENT SYSTEM LOAD LIMIT DATA



DYNAMIC 3 CROSS BAR LOAD LIMIT (ON AND OFF ROAD):
***USE THE VEHICLE MANUFACTURER'S MAXIMUM ROOF ALLOWANCE IF IT IS LOWER THAN THE FIGURE LISTED**

 CARGO UP TO 92.5 KG 204 lbs	 SYSTEM WEIGHT 7.5 KG 16.5 lbs	+	=	 LOAD LIMIT UP TO 100 KG 220 lbs	OR	 Max kg *VEHICLE MANUFACTURER'S ROOF LOAD LIMIT
---	---	----------	----------	--	-----------	--

 **STATIC LOAD LIMIT: UP TO 250KG / 551LBS***



Cargo Load Limit

Total permissible weight allowed on top, and attached to roof racks whilst the vehicle is in motion.



System Weight

Total weight of the roof rack system. (e.g. Crossbars, Backbone, Platform)



Max System Load Capacity


Please ensure you use the vehicle manufacturer's maximum roof allowance if it is lower than the figure listed in the fitting chart/supplement.



Vehicle Manufacturer's Load Limit

Total permissible weight attached to the roof of the car. This is inclusive of the weight of the roof rack system.

- Check part number or kit is correct for use with your vehicle.
- Do not attempt to fit the rack system to your vehicle unless you fully understand these fitting instructions. Please direct any questions regarding fitting to the dealer from where the roof racks were purchased.
- Off-road conditions can be much more rigorous. Extreme care must be taken on any driven path that does not contain a surface protection layer (tar/bitumen).
- Roof racks must be removed when vehicle is put through an automatic car wash.
- With utility vehicles, the cabin and the canopy move independently. Roof racks and vehicle can be damaged if the item transported is rigidly fixed at points on both the cabin and canopy. Instead, rigidly fix to either the cabin roof racks or the canopy roof racks.
- Always ensure you fasten your load securely.
- Use only non-stretch fastening ropes or straps to attach cargo to your load.

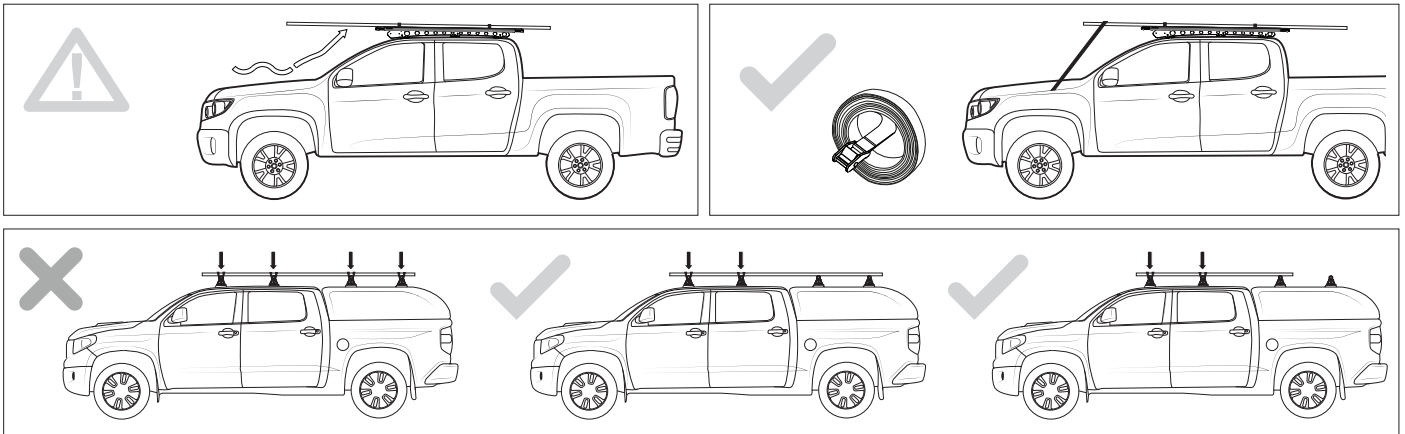

RCP95-BK Instructions

In service maintenance checks

- All bolt connections should be checked after driving a short distance when you first install your roof racks.
- All bolted connections should be checked again at regular intervals (weekly is recommended, depending on road conditions, usage, loads and distances travelled).
- All bolted connections should be checked each time they are re-fitted.
- Off-road conditions are more rigorous. Check all bolted connections and your load more regularly.
- Ensure that your vehicle manufacturer's GVM, and gross axle weights are not exceeded (refer to vehicle owner's manual).

Torque Settings

Unless stated otherwise in these instructions, all fasteners should be set to the following torque settings:

M6: 4-5Nm (3-4lbs/ft),








M8: 8-10Nm (6-7.5lbs/ft)

M10: 16-18Nm (12-13lbs/ft).

Note for Dealers and Fitters

It is your responsibility to ensure these fitting instructions are given to the end user or client. These instructions remain the property of Rhino-Rack Australia Pty. Ltd. and may not be used or changed for any other purpose than intended.

Parts List

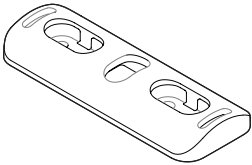

<p>Short Fixed Mount Rotation Block M8</p>  <p>A x6</p>	<p>Short Fixed Mount Base</p>  <p>B x6</p>	<p>Tall Fixed Mount Flat Rubber</p>  <p>C x6</p>	<p>Short Fixed Mount Base Cover</p>  <p>D x12</p>
<p>M8 x 50mm Hex Head Flanged T40</p>  <p>E x6</p>	<p>Butyl Patch</p>  <p>F x6</p>	<p>Instruction</p>  <p>G x1</p>	

Tools Required:

T1 - 13mm Socket Wrench/Spanner





RCP95-BK Instructions

1 Remove factory plugs, exposing M8 threaded mounting points.

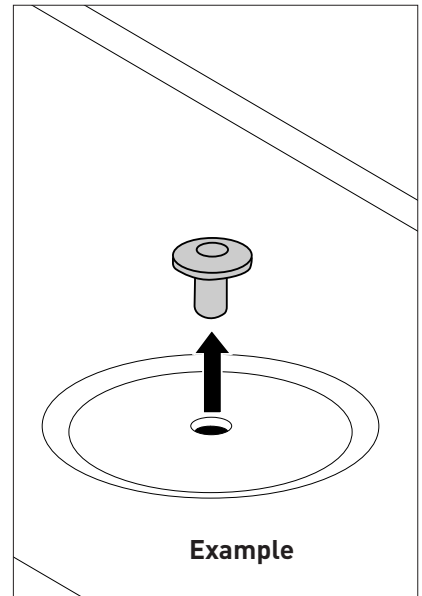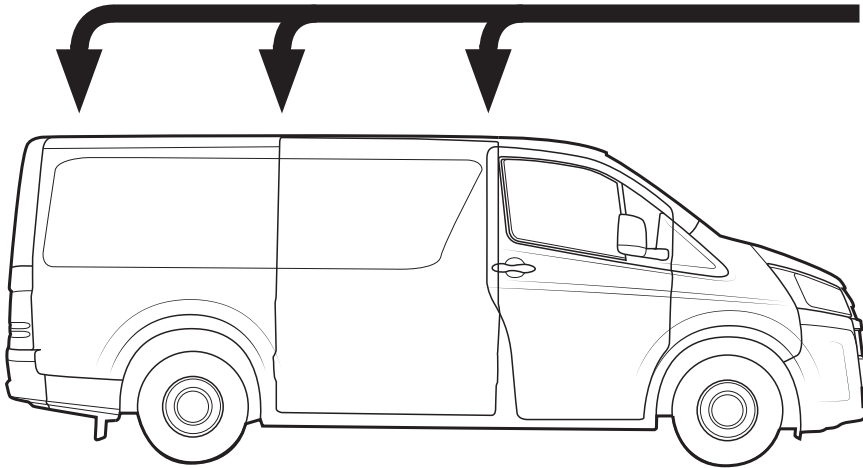


Note: Visual may vary depending on the vehicle.

2 Repeat to opposite side of vehicle.

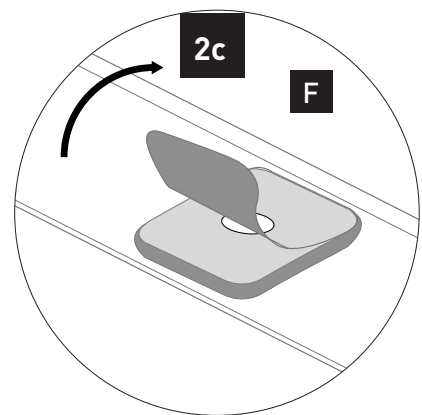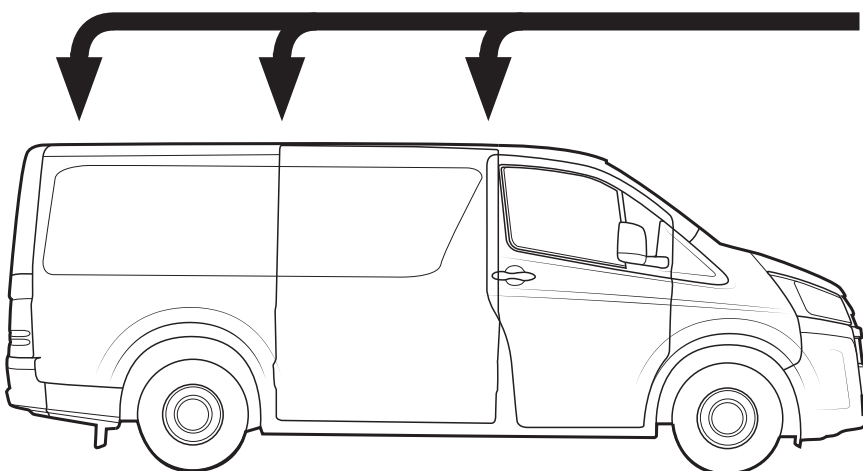

3 Repeat for each Short Fixed Mount Base.

6x

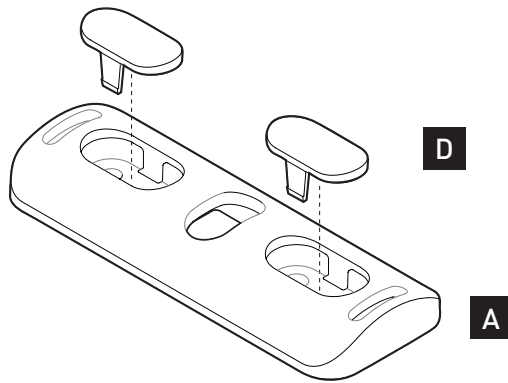

4

RCHT6
(Leg Sold Separately)

T1

E

A

B

C

F

